



Troubleshooting

Toner empty

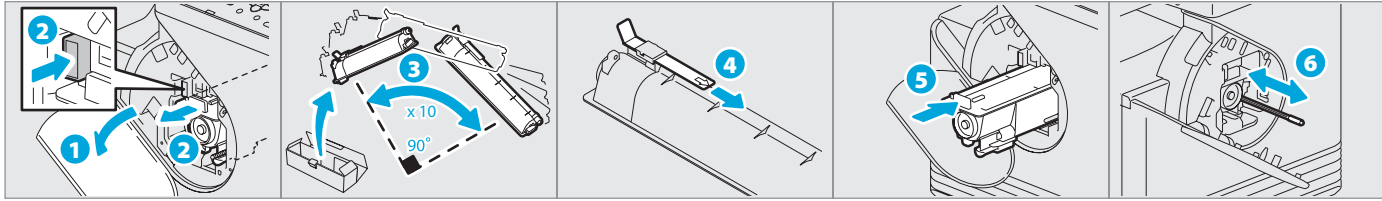


 **User's Guide: Chapter 6**


Paper misfeed

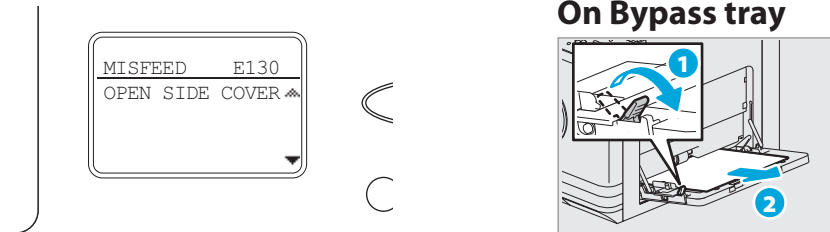


On Bypass tray



In Side cover

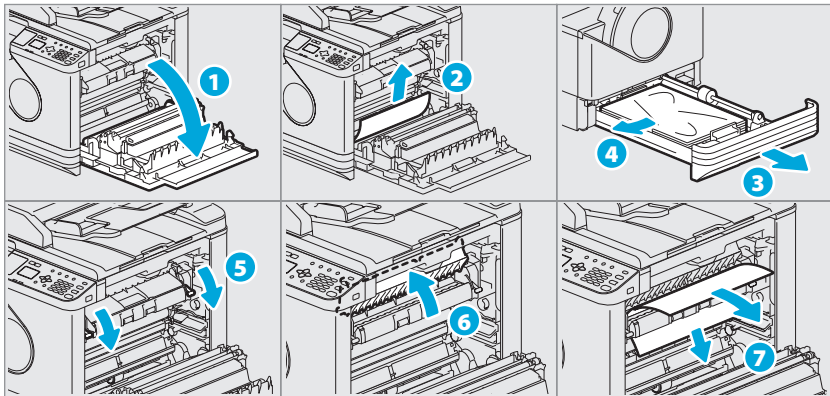

In ADF

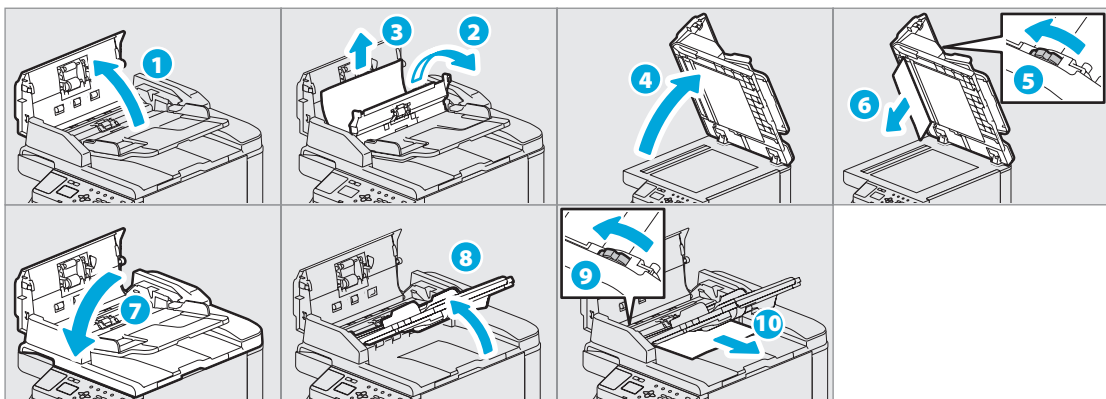


TOSHIBA
Leading Innovation >>>

MULTIFUNCTIONAL DIGITAL SYSTEMS

e-STUDIO2505H

Quick Guide



This manual describes the components, preparations, basic operations, and troubleshooting for the equipment. **Before using the equipment, read the *Safety Information (Printouts)*.** The DVD bundled with the equipment contains the User's Guide (PDF file) besides this guide.

Trademarks


Company names and product names in this manual are the trademarks of their respective companies.

Component Description


Equipment

 [User's Guide: Chapter 1](#)

Automatic Document Feeder (ADF)

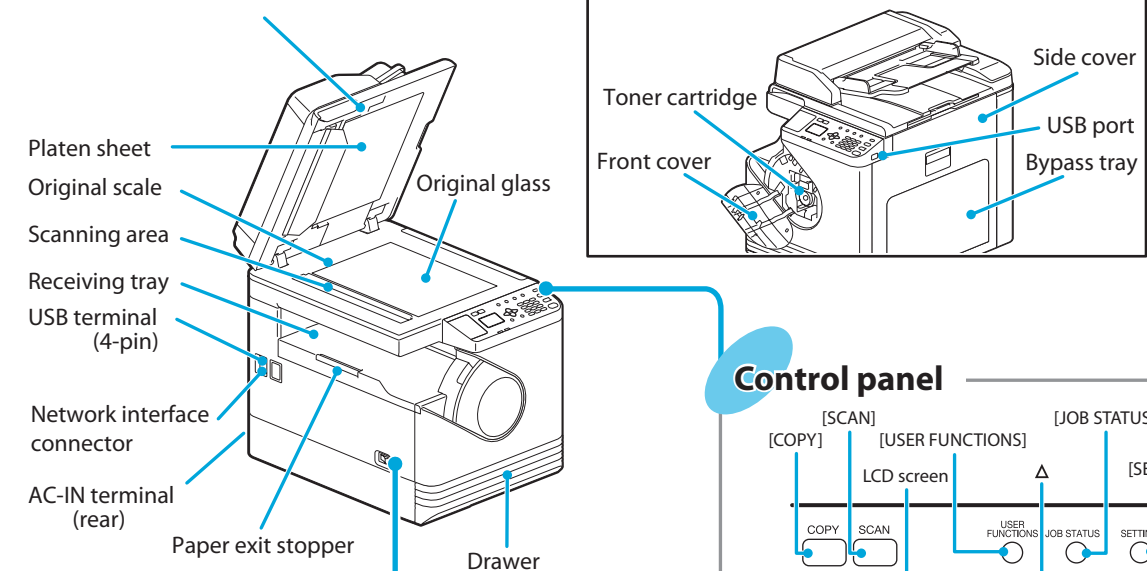


Control panel

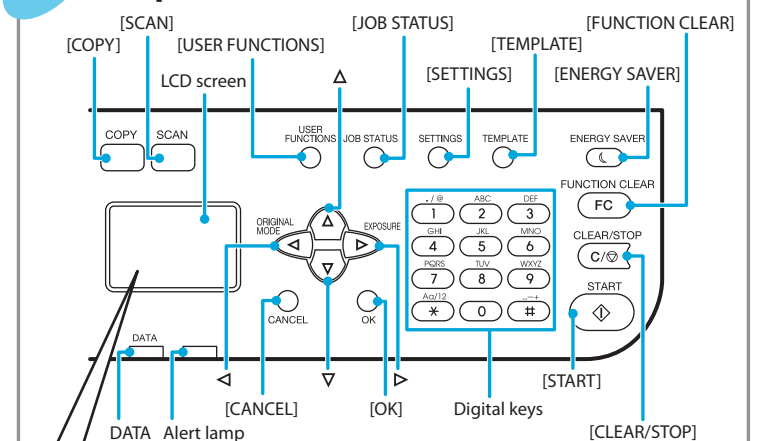

Power switch

Turning on


Press the power switch to "I" (on).



Turning off

Press the power switch to "⏻" (off).


Main screen (Copy)

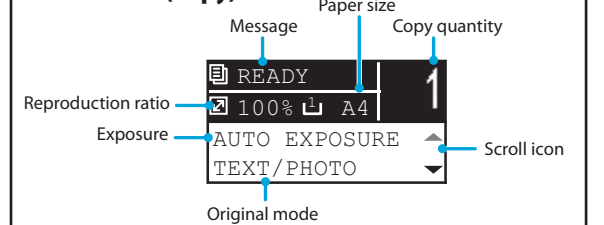


Loading paper

User's Guide: Chapter 1

Drawer

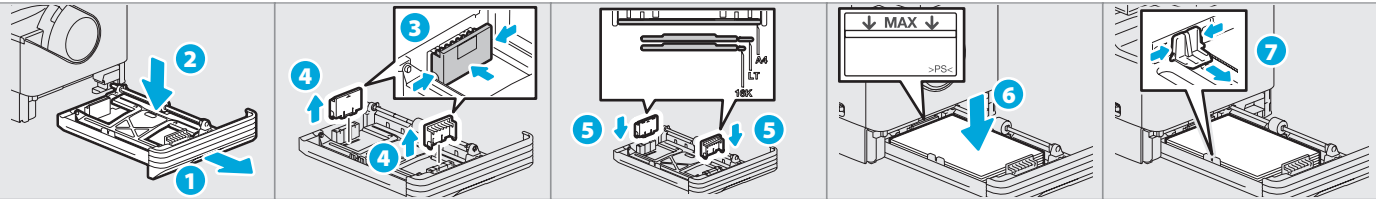

Bypass tray

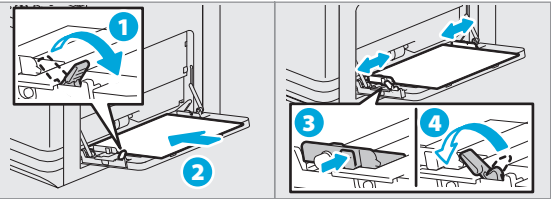

To set paper size of Drawer

When you load paper in the drawer, a pop-up window appears. Follow the instructions and set the paper size. (When the "POP UP" function is set to "ENABLE".)

To print on an A3 (LD) page

Load paper in the bypass tray, and follow the pop-up instructions to set the paper size and paper type.


Driver installation

Software Installation Guide: Chapter 2

Installing the driver requires the administrator authority.
For Windows 7, Windows 8, Windows Server 2008 R2, or Windows Server 2012, use the installer.

Connecting computer

Before installing the drivers, connect the equipment and the computer with a USB cable or Network interface cable.

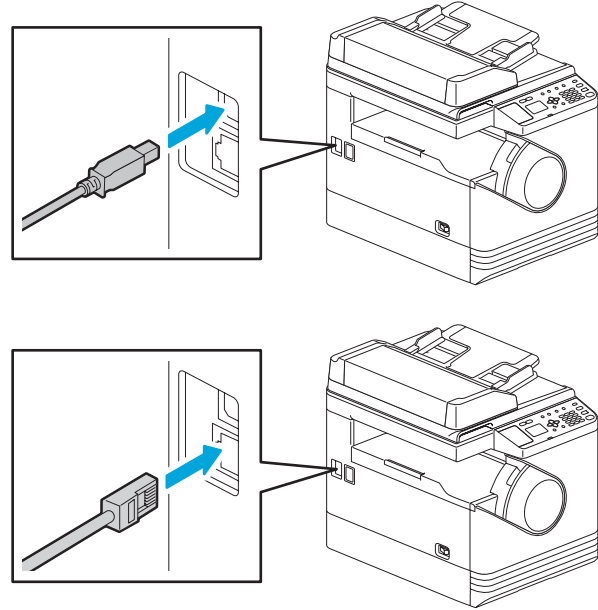

Note when installing from installer

- Close all running applications.
- If the installer does not automatically start, double-click "Setup.exe" in the DVD.

Using installer

- Close all running applications.
- When a USB cable is connected, make sure that the equipment is turned off.
- Insert the DVD into the computer.
- Double-click "Setup.exe".
- Follow the on-screen instructions.


Printer and scanner functions are available.

Copier

User's Guide: Chapter 2


1. Place the original(s).


Original glass




2. Press [COPY] and make the copy settings.

ADF





3. Enter the number of copies with the digital keys 1, and then press [START] 2 to copy.



To stop copying

Press [CLEAR/STOP]

To reset settings and LCD screen after copying

Press [FUNCTION CLEAR]

Shortcut keys


Press <: "ORIGINAL MODE"
Press >: Europe and the Americas "EXPOSURE",
Except Europe and the Americas "ID CARD"

Printer

User's Guide: Chapter 3

1. Select [Print] from the application's [File] menu.

2. Select your printer 1, and then click [Preferences] 2.



3. Make print option settings, and then click [OK].

4. Click [Print] ([OK]).

Scanner

User's Guide: Chapter 4

Scan to USB Memory

- Place the original(s).
- Press [SCAN].
- Connect the USB storage device to the equipment and wait a few seconds.
- Press ∇ or ▲ to select "USB", and then press [OK].
- Press > to make the scan settings as required.
- Press [START] to scan your documents.

TWAIN Scan

- Place the original(s).
- Launch a TWAIN-compliant application.
- Select the device from the application's [File] menu.
- Select the menu to scan from the application's [File] menu.
- Make the scan settings, and then click [Scan].

Templates

User's Guide: Chapter 2, 4

Registering a template

- Press [COPY] or [SCAN].
- Make settings for the functions to register as a template.
- Press [TEMPLATE].
- Press ∇ or ▲ to select "REGISTRATION", and then press >.
- Press ∇ or ▲ to select a template, and then press [OK].

Recalling a template

- Press [COPY] or [SCAN].
- Press [TEMPLATE].
- Press ∇ or ▲ to select "RECALL", and then press >.
- Press ∇ or ▲ to select the template, and then press [OK].

Component Description

Troubleshooting