

4006 860960 JADO捷道 中国区 客服热线

JADO中國總經理 (上海) JADO Marketing Center of China(shanghai)  
Add: 中國上海市青浦區盈港東路3377號 3-3樓  
JADO中國生產基地 (深圳) JADO Manufacturing Base of (shenzhen)  
Add: 深圳市寶安區 觀瀾高德工業區5號樓 9號科技園2-3樓  
www.china-jado.com

目錄

|                    |   |
|--------------------|---|
| 01 第1章 車載攝像機按鍵功能介紹 | 07 第四章 系統菜單說明   |
| 03 第2章 產品參數        | 11 第五章 下載文件   |
| 04 第3章 功能操作        | 12 第六章 注意事項   |
| 04 安裝              |   |
| 04 充電              |   |
| 05 錄像模式            | 13 The function of vehicle camera keys 19 System menu description |
| 05 錄音功能            | 15 Product parameters 23 Download the file                        |
| 05 回放模式            | 16 Functional operation 24 Note                                   |
| 05 保護功能            | 16 Installation   |
| 05 一鍵鎖定            | 16 Power supply   |
| 06 瀏覽和刪除文件         | 17 Video mode   |
| 06 功能設定            | 17 Recording function   |
|                    | 17 Playback function  |
|                    | 17 Protection function  |
|                    | 17 Key video  |
|                    | 18 Browse and deleting files                                      |
|                    | 18 Function set   |

目錄

1



配件：說明書、車充、電源AV輸出一體線（選配）、繩帶、無塵布、保修卡。

01

車載攝像機按鍵功能介紹

1

【警告】為避免因操作不當引起產品損壞, 請先閱讀本手冊中的所有操作指導的安全性信息, 然後再使用  
JADO產品。更多產品信息詳見：[www.china-jado.com](http://www.china-jado.com)查詢。

D620是JADO捷道公司在中国市場推出的一款4.3寸高清廣角鏡頭，像素達到500萬像素，140度高解析度廣角，在推出後，深受消費者喜愛。D620比原車後視鏡尺寸更大，更寬。在您行駛過程中，能更清晰、更大視角的看到後方來車，對超車以及變換車道的安全性有很大提升。

第1章 車載攝像機按鍵功能介紹


02

The function of vehicle camera keys

1

【warning】to avoid product damage caused by improper operation, please read all the instructions in this manual, the security of the information and then use JADO products, for more product information, please login: [www.china-jado.com](http://www.china-jado.com),

D620 is JADO Jie Du company launched in the Chinese market a 4.3 inch high-definition screen. Camera pixels to 5000000 pixels, 140 degree high resolution wide angle, in the introduction, by the consumer favorite. D620 than the original car rearview mirror size larger, wider. In your driving process, can be more clear, more perspective to see the rear car, to raise a lot of overtaking and lane changing security.

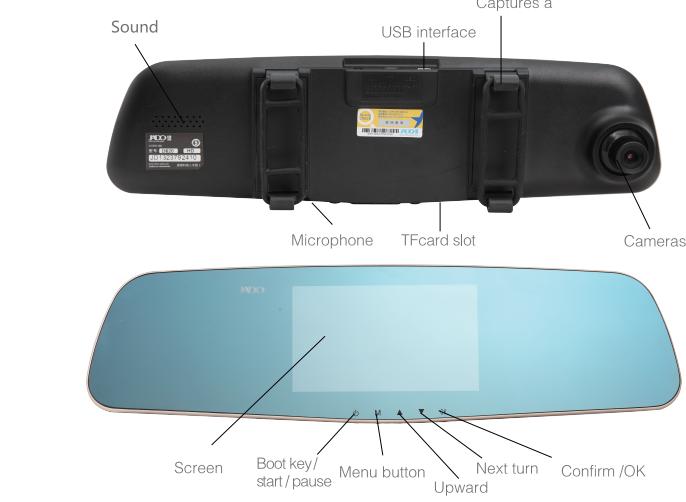

Accessories: manual, car charger, power AV output one line (optional), bandages, clean cloth, warranty card.

chapter 1 the function of vehicle camera keys

14

01

產品參數

2

功能操作

3

|                              |   |
|------------------------------|---|
| 鏡頭: 500萬像素, 140度高解析廣角鏡頭      | 電池頻率: 50HZ/60HZ                           |
| 顯示屏: 4.3吋LCD屏                | 操作溫度: (-20°C~70°C)                        |
| 視頻格式: 支持H.264格式              | 錄像分辨率: WVGA 720P 1080                     |
| 存儲器: 支持TF高速記憶卡 (4G-32G)      | 記錄模式: 錄像/錄音/循環錄像                          |
| 录像分辨率: 1280*720 30fps        | 錄像時間: 可選時間                                |
| 語言設置: 多國語言, 以中文為主, 英文, 德文    | 無線錄影: 录像物與之的時間小於1秒                        |
| 壓力感知: 三軸重力感知加速度傳感器           | 錄像時間: 录像物與之的時間小於1秒                        |
| 錄影預覽: 鏡頭即時預覽 (1, 2, 3, 分鐘預覽) | 循环錄影: 卡滿後自動刪除即時錄影                         |
| 音頻功能: 打開/關                   | 視頻壓縮方式: H.264                             |
| 錄像功能: 一鍵錄定                   | 其他功能: 一鍵拍照 ->一鍵錄音 ->一鍵錄像 ->一鍵CD/TV OUT 切換 |
| 電源接口: 內置聚合物電池                | 電源接口: 5V 1.5A                             |

03



充電  
A. 使用外接電源供電充電 充電方式: 連接USB車充  
B. 接連接AV線  
當汽車啓動時,DVR會自動開始錄影,斷電後十五秒,DVR會自動關機並自動保存前錄影的文件,注:只能使用輸出電壓為5V的車載電源並且在使用車充供電時需要接上或者斷電才能關閉DVR

04

Product parameters

2

Functional operation

3

|                    |  |                     |  |
|--------------------|--|---------------------|--|
| Item               | 參照預設: 140度廣角鏡頭   | power frequency     | 50HZ/60HZ  |
| Screen             | 4.3吋LCD屏   | Temperature         | (-20°C~70°C)   |
| video format       | H.264  | Video resolution    | WVGA 720P 1080   |
| storage card       | Support TF high speed memory card (4G-32G)   | Recording mode      | AVI format video, circulation                                      |
| Video resolution   | 1280*720 30fps   | Video signal format | PAL/NTSC   |
| language settings  | Many languages, including English, Chinese and Russian default   | gravity reduction   | Three axis impact acceleration sensor                              |
| Recording function | Press the record key to start recording. If you want to stop recording, press the stop key. When recording, if you want to delete the recorded file, press the delete key. If you want to record a short video segment, you can set the recording time to 1, 2, 3, 5 minutes respectively. | motion detection    | Yes  |
| Recording          | Off  | Cycle recording     | Card will automatically delete old files and records the new files |
| battery            | Built-in polymer battery   | compress mode       | H.264  |
| Playback function  | Playback   | Other functions     | A photograph, a playback, record, a LCD/TV OUT switch              |
| interface          | 5V 1.5A  |                     |  |

15

Functional operation

2

Functional operation

3

Video mode  
Press the power button or connect the USB car charger, DVR will automatically enter the recording mode. (please insert TF Card) file will automatically be saved to TF card. When pulled out USB car charger or press the off button close to DVR, the blue indicator lights off.

Recording function  
The recording is needs to close the long press▲ 2 seconds enabled by default.

Playback mode  
In the video after the stop press▼ into the playback mode, press ▲ or ▼ choose in front of or behind the captured video, broadcast by play key.

Protection function

The protection function is can put a video or video protection lock, not covered in circulation in the video.

Key video

In the video, press play key, the shot video cannot be covered in circulating video, unlock by return the video mode.

16

Browse and delete files

Open DVR and press play to stop the video record, press play to enter the playback mode. Press up key▲ choose to record file and press the play button play preview. If you want to delete the file, stop playing into the delete mode press the menu button to M. Then press key▼ deleted or formatted according to a single M of food. Operation.

Function set

Enter the system menu setting, first of all need to stop recording (press the button to stop the video recording or remove the memory card to enter the menu can't access the menu, video) enter the system menu, press the menu key M to enter setup menu interface. Then press up key to select specific parameters, the final confirmation operation press key M. When all the setup is complete, continue to press the menu button to exit the setup interface.

chapter 3 function operation

18

05

第3章 功能操作

06

功能操作

3

測量和刪除文件  
開啟DVR並按錄影鍵 停止錄影,按鍵▼進入回放模式,按上鍵▲選擇錄制的文件並按播放鍵▶播放預覽,如果要刪除文件,停止播放後按菜單鍵[M]進入刪除模式,按下鍵▼選擇刪除或者格式化並按菜單鍵退出操作。

功能設定

進入系統菜單進行功能設置,首先停止錄像(錄像時無法進入菜單,請先按錄影鍵停止錄像或取出內存卡進入菜單)進入菜單後在顯示屏上會顯示出兩個選項,連接電腦按確認鍵確定DVR後,藍色指示燈開始。

錄音功能

錄音是默認開啓的如需關閉長按▲一秒。

回放模式

在錄像停止後按▼進到回放模式,按(▲或▼)選擇前面或者後面所拍下的錄像,播放按回鍵。

保護功能

保護功能是可以把一段視頻或者所有視頻保護加鎖,在錄像中不被覆蓋。

一鍵鎖定

在錄像中按锁定鍵鎖定,所拍攝視頻在循環錄像中不能被覆蓋,解鎖按▲回到循環錄像模式。

06

第3章 功能操作

07

System menu description

4

3.Exposure compensation: optional -2.0, -5/3, -4/3, -1.0, -2/3, -1/3, +0.0, +1/3, +2/3, +1.0, +4/3, +5/3, +2.0  
4.Cycle recording: optional 1 minutes, 2 minutes, 3 minutes, 5 minutes

5.Motion detection: on / off optional, motion detection is the mobile detection

6.Exposure compensation: optional -2.0, -5/3, -4/3, -1.0, -2/3, -1/3, +0.0, +1/3, +2/3, +1.0, +4/3, +5/3, +2.0  
7.Date: open, close the optional label  
8.Gsensor gravity sensor settings: optional, in turn, high, low

9.Date / time (key to adjust the date according to the turn key size, press the power to jump to the next option)

10.Automatic shutdown: optional, 2 minutes, 5 minutes, 10 minutes, automatic shutdown refers to the standby without operation over a certain time shutdown

11.Keys: open, close the optional voice

12.The language settings available in 12 languages: Simplified Chinese, traditional Chinese, English, Russian, Japanese, French, Spanish, Portuguese, German, Greek, Turkish.

13. Volume adjustment: turn, 1, 2, 3, 4, 5, 6, 7, 8

14. Light band: 50HZ, 60HZ

15. TV mode: NTSC, PAL

16. Default setting: restore default settings: confirm / cancel

17. Format: format the memory, all the data will be deleted: confirm / cancel

18. Time: 1 minutes, 3 minutes, 5 minutes, turn

19. The boot record: on / off

20. Light settings: on / off

21. Image rotation: on / off

22. AV: on / off

23. Version: the version number display system

24. chapter 4 system menu description

20

07

第4章 系统菜单说明

08