



ModelSim® SE Tutorial

Software Version 6.2b

August 2006

**© 1991-2006 Mentor Graphics Corporation
All rights reserved.**

This document contains information that is proprietary to Mentor Graphics Corporation. The original recipient of this document may duplicate this document in whole or in part for internal business purposes only, provided that this entire notice appears in all copies. In duplicating any part of this document, the recipient agrees to make every reasonable effort to prevent the unauthorized use and distribution of the proprietary information.

This document is for information and instruction purposes. Mentor Graphics reserves the right to make changes in specifications and other information contained in this publication without prior notice, and the reader should, in all cases, consult Mentor Graphics to determine whether any changes have been made.

The terms and conditions governing the sale and licensing of Mentor Graphics products are set forth in written agreements between Mentor Graphics and its customers. No representation or other affirmation of fact contained in this publication shall be deemed to be a warranty or give rise to any liability of Mentor Graphics whatsoever.

MENTOR GRAPHICS MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS MATERIAL INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

MENTOR GRAPHICS SHALL NOT BE LIABLE FOR ANY INCIDENTAL, INDIRECT, SPECIAL, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING BUT NOT LIMITED TO LOST PROFITS) ARISING OUT OF OR RELATED TO THIS PUBLICATION OR THE INFORMATION CONTAINED IN IT, EVEN IF MENTOR GRAPHICS CORPORATION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

RESTRICTED RIGHTS LEGEND 03/97

U.S. Government Restricted Rights. The SOFTWARE and documentation have been developed entirely at private expense and are commercial computer software provided with restricted rights. Use, duplication or disclosure by the U.S. Government or a U.S. Government subcontractor is subject to the restrictions set forth in the license agreement provided with the software pursuant to DFARS 227.7202-3(a) or as set forth in subparagraph (c)(1) and (2) of the Commercial Computer Software - Restricted Rights clause at FAR 52.227-19, as applicable.

Contractor/manufacturer is:

Mentor Graphics Corporation
8005 S.W. Boeckman Road, Wilsonville, Oregon 97070-7777.

Telephone: 503.685.7000

Toll-Free Telephone: 800.592.2210

Website: www.mentor.com

SupportNet: www.mentor.com/supportnet

Send Feedback on Documentation: www.mentor.com/supportnet/documentation/reply_form.cfm

TRADEMARKS: The trademarks, logos and service marks ("Marks") used herein are the property of Mentor Graphics Corporation or other third parties. No one is permitted to use these Marks without the prior written consent of Mentor Graphics or the respective third-party owner. The use herein of a third-party Mark is not an attempt to indicate Mentor Graphics as a source of a product, but is intended to indicate a product from, or associated with, a particular third party. A current list of Mentor Graphics' trademarks may be viewed at: www.mentor.com/terms_conditions/trademarks.cfm.

Table of Contents

Chapter 1

Introduction.....	15
Assumptions.....	15
Where to Find Our Documentation.....	15
Download a Free PDF Reader With Search.....	16
Technical Support and Updates.....	16
Before you Begin.....	17
Example Designs.....	17

Chapter 2

Conceptual Overview.....	19
Introduction.....	19
Design Optimizations.....	19
Basic Simulation Flow.....	20
Project Flow.....	22
Multiple Library Flow.....	23
Debugging Tools.....	24

Chapter 3

Basic Simulation.....	25
Introduction.....	25
Design Files for this Lesson.....	25
Related Reading.....	25
Disable Optimizations.....	26
Creating the Working Design Library.....	26
Compiling the Design.....	28
Loading the Design into the Simulator.....	29
Running the simulation.....	31
Setting Breakpoints and Stepping in the Source Window.....	33
Navigating the Interface.....	35
Lesson Wrap-Up.....	40

Chapter 4

Projects.....	41
Introduction.....	41
Design Files for this Lesson.....	41
Related Reading.....	41
Disable Optimizations.....	42
Creating a New Project.....	42
Adding Objects to the Project.....	43
Changing Compile Order (VHDL).....	45
Compiling and Loading a Design.....	46

Organizing Projects with Folders.	48
Adding Folders	48
Moving Files to Folders	50
Simulation Configurations.	50
Lesson Wrap-Up	52
 Chapter 5	
Working With Multiple Libraries.	55
Introduction	55
Design Files for this Lesson	55
Related Reading	55
Disable Optimizations	56
Creating the Resource Library.	56
Creating the Project	58
Linking to the Resource Library	59
Verilog	59
VHDL	60
Linking in Verilog.	60
Linking in VHDL	61
Permanently Mapping VHDL Resource Libraries	63
Lesson Wrap-Up	64
 Chapter 6	
Simulating Designs With SystemC	65
Introduction	65
Design Files for this Lesson	65
Related Reading	65
Disable Optimizations	66
Setting up the Environment	66
Preparing an OSCI SystemC design	66
Compiling a SystemC-only Design	70
Mixed SystemC and HDL Example	71
Viewing SystemC Objects in the GUI.	75
Setting Breakpoints and Stepping in the Source Window	76
Examining SystemC Objects and Variables	78
Removing a Breakpoint	79
Lesson Wrap-up.	80
 Chapter 7	
Analyzing Waveforms	81
Introduction	81
Related Reading	82
Disable Optimizations	82
Loading a Design.	82
Adding Objects to the Wave Window	82
Zooming the Waveform Display	84
Using Cursors in the Wave Window	85
Working with a Single Cursor	85

Table of Contents

Working with Multiple Cursors	87
Saving the Window Format	88
Lesson Wrap-Up	88
 Chapter 8	
Creating Stimulus With Waveform Editor	89
Introduction	89
Related Reading	89
Disable Optimizations	89
Loading a Design Unit	90
Creating Waves with a Wizard	90
Editing Waveforms in the Wave Window	94
Saving and Reusing the Wave Commands	97
Exporting the Created Waveforms	98
Running the Simulation	99
Simulating with the Testbench File	100
Importing an EVCD File	101
Lesson Wrap-Up	102
 Chapter 9	
Debugging With The Dataflow Window.....	103
Introduction	103
Design Files for this Lesson	103
Related Reading	103
Disable Optimizations	104
Compiling and Loading the Design	104
Exploring Connectivity	106
Tracing Events	109
Tracing an X (Unknown)	112
Displaying Hierarchy in the Dataflow Window	114
Lesson Wrap-Up	115
 Chapter 10	
Viewing And Initializing Memories	117
Introduction	117
Design Files for this Lesson	117
Related Reading	117
Disable Optimizations	117
Compiling and Loading the Design	118
Viewing a Memory and its Contents	118
Navigating Within the Memory	122
Exporting Memory Data to a File	124
Initializing a Memory	125
Interactive Debugging Commands	129
Lesson Wrap-Up	132

Chapter 11	
Analyzing Performance With The Profiler	133
Introduction	133
Design Files for this Lesson	133
Related Reading	133
Disable Optimizations	134
Compiling and Loading the Design	134
Running the Simulation	135
View Profile Details	138
Filtering and Saving the Data	139
Lesson Wrap-Up	141
Chapter 12	
Simulating With Code Coverage	143
Introduction	143
Design Files for this Lesson	143
Related Reading	143
Disable Optimizations	144
Compiling the Design	144
Loading and Running the Design	145
Coverage Statistics in the Main window	147
Coverage Statistics in the Source Window	150
Toggle Statistics in the Objects Pane	152
Excluding Lines and Files from Coverage Statistics	153
Creating Code Coverage Reports	154
Lesson Wrap-Up	156
Chapter 13	
Comparing Waveforms	157
Introduction	157
Design Files for this Lesson	157
Related Reading	157
Creating the Reference Dataset	158
Creating the Test Dataset	158
Verilog	159
VHDL	159
Comparing the Simulation Runs	160
Viewing Comparison Data	161
Comparison Data in the Wave window	161
Comparison Data in the List Window	162
Saving and Reloading Comparison Data	163
Lesson wrap-Up	165
Chapter 14	
Automating Simulation	167
Introduction	167
Related Reading	167
Disable Optimizations	167

Table of Contents

Creating a Simple DO File.	168
Running in Command-Line Mode.	169
Using Tcl with the Simulator.	171
Lesson Wrap-Up	173

Index

End-User License Agreement

List of Examples

List of Figures

Figure 2-1. Basic Simulation Flow	20
Figure 2-2. Project Flow	22
Figure 2-3. Multiple Library Flow.....	23
Figure 3-1. Basic Simulation Flow	25
Figure 3-2. The Create a New Library Dialog.....	27
Figure 3-3. work Library in the Workspace.....	27
Figure 3-4. Compile Source Files Dialog	28
Figure 3-5. Verilog Modules Compiled into work Library	29
Figure 3-6. Loading Design with Start Simulation Dialog.....	30
Figure 3-7. Workspace and Objects Panes Showing a Verilog Design.....	31
Figure 3-8. Using Menus to Add Signals to Wave Window	32
Figure 3-9. Waves Drawn in Wave Window.....	32
Figure 3-10. Setting Breakpoint in Source Window	33
Figure 3-11. Setting Restart Functions	34
Figure 3-12. Blue Arrow Indicates Where Simulation Stopped.....	34
Figure 3-13. Values Shown in Objects Window	35
Figure 3-14. Variable Name and Value in Source Examine Window.....	35
Figure 3-15. The Main Window	36
Figure 3-16. Window/Pane Control Icons.....	37
Figure 3-17. zooming in on Workspace Pane	38
Figure 3-18. Panes Rearranged in Main Window	39
Figure 4-1. Create Project Dialog	43
Figure 4-2. Adding New Items to a Project.....	44
Figure 4-3. Add file to Project Dialog	44
Figure 4-4. Newly Added Project Files Display a “?” for Status	45
Figure 4-5. Compile Order Dialog.....	46
Figure 4-6. Library Tab with Expanded Library	47
Figure 4-7. Structure Tab for a Loaded Design.....	47
Figure 4-8. Adding New Folder to Project	48
Figure 4-9. A Folder Within a Project.....	49
Figure 4-10. Creating Subfolder	49
Figure 4-11. A folder with a Sub-folder	49
Figure 4-12. Changing File Location via the Project Compiler Settings Dialog.....	50
Figure 4-13. Simulation Configuration Dialog	51
Figure 4-14. A Simulation Configuration in the Project Tab	52
Figure 4-15. Transcript Shows Options for Simulation Configurations	52
Figure 5-1. Creating New Resource Library	57
Figure 5-2. Compiling into the Resource Library	58
Figure 5-3. Verilog Simulation Error Reported in Main Window.....	59
Figure 5-4. VHDL Simulation Warning Reported in Main Window	60

Figure 5-5. Specifying a Search Library in the Simulate Dialog.	61
Figure 5-6. Mapping to the <i>parts_lib</i> Library	62
Figure 5-7. Adding LIBRARY and USE Statements to the Testbench.	63
Figure 6-1. SystemC Code Before and After Modifications	68
Figure 6-2. Editing the SystemC Header File.	69
Figure 6-3. The <i>ringbuf.h</i> File.	72
Figure 6-4. The <i>test_ringbuf.cpp</i> File	72
Figure 6-5. The test_ringbuf Design	74
Figure 6-6. SystemC Objects in the work Library.	75
Figure 6-7. SystemC Objects in the sim Tab of the Workspace	76
Figure 6-8. Active Breakpoint in a SystemC File	77
Figure 6-9. Simulation Stopped at Breakpoint	77
Figure 6-10. Stepping into a Separate File.	78
Figure 6-11. Output of show Command	79
Figure 6-12. SystemC Primitive Channels in the Wave Window	80
Figure 7-1. Panes of the Wave Window	81
Figure 7-2. Undocking the Wave Window	83
Figure 7-3. Zooming in with the Mouse Pointer	84
Figure 7-4. Working with a Single Cursor in the Wave Window	85
Figure 7-5. Renaming a Cursor	86
Figure 7-6. Interval Measurement Between Two Cursors.	87
Figure 7-7. A Locked Cursor in the Wave Window	87
Figure 8-1. Initiating the Create Pattern Wizard from the Objects Pane.	91
Figure 8-2. Create Pattern Wizard	91
Figure 8-3. Specifying Clock Pattern Attributes	92
Figure 8-4. The <i>clk</i> Waveform.	92
Figure 8-5. The <i>reset</i> Waveform	93
Figure 8-6. Edit Insert Pulse Dialog	94
Figure 8-7. Signal <i>reset</i> with an Inserted Pulse	94
Figure 8-8. Edit Stretch Edge Dialog.	95
Figure 8-9. Stretching an Edge on the <i>clk</i> Signal.	95
Figure 8-10. Deleting an Edge on the <i>clk</i> Signal	96
Figure 8-11. The Export Waveform Dialog.	98
Figure 8-12. The counter Waveform Reacts to Stimulus Patterns.	99
Figure 8-13. The <i>export</i> Testbench Compiled into the work Library	100
Figure 8-14. Waves from Newly Created Testbench.	101
Figure 8-15. EVCD File Loaded in Wave Window	102
Figure 8-16. Simulation results with EVCD File	102
Figure 9-1. A Signal in the Dataflow Window	106
Figure 9-2. Expanding the View to Display Connected Processes	107
Figure 9-3. The <i>test</i> Net Expanded to Show All Drivers.	107
Figure 9-4. The embedded wave viewer pane	109
Figure 9-5. Signals Added to the Wave Viewer Automatically	110
Figure 9-6. Cursor in Wave Viewer Marks Last Event	111
Figure 9-7. Tracing the Event Set	111

List of Figures

Figure 9-8. A Signal with Unknown Values	112
Figure 9-9. ChaseX Identifies Cause of Unknown on <i>t_out</i>	113
Figure 9-10. Displaying Hierarchy in the Dataflow Window	114
Figure 10-1. Viewing the Memories Tab in the Main Window Workspace	119
Figure 10-2. The mem Tab in the MDI Frame Shows Addresses and Data	119
Figure 10-3. The Memory Display Updates with the Simulation	120
Figure 10-4. Changing the Address Radix.	121
Figure 10-5. New Address Radix and Line Length.	121
Figure 10-6. Goto Dialog.	122
Figure 10-7. Editing the Address Directly.	123
Figure 10-8. Searching for a Specific Data Value.	123
Figure 10-9. Export Memory Dialog.	124
Figure 10-10. Import Memory Dialog.	126
Figure 10-11. Initialized Memory from File and Fill Pattern	127
Figure 10-12. Data Increments Starting at Address 251	128
Figure 10-13. Original Memory Content.	129
Figure 10-14. Changing Memory Content for a Range of Addresses	130
Figure 10-15. Random Content Generated for a Range of Addresses.	130
Figure 10-16. Changing Memory Contents by Highlighting.	131
Figure 10-17. Entering Data to Change.	131
Figure 10-18. Changed Memory Contents for the Specified Addresses	132
Figure 11-1. Sampling Reported in the Transcript	135
Figure 11-2. The Profile Window	136
Figure 11-3. Expand the Hierarchical Function Call Tree.	137
Figure 11-4. The Source Window Showing a Line from the Profile Data	138
Figure 11-5. Profile Details of the Function <i>Tcl_Close</i>	138
Figure 11-6. Profile Details of Function <i>sm_0</i>	139
Figure 11-7. The Profiler Toolbar	139
Figure 11-8. The Filtered Profile Data.	140
Figure 11-9. The Profile Report Dialog.	140
Figure 11-10. The <i>calltree.rpt</i> Report	141
Figure 12-1. Code Coverage Columns in the Main Window Workspace	145
Figure 12-2. Missed Coverage Pane	146
Figure 12-3. Instance Coverage Pane	146
Figure 12-4. Details Pane.	147
Figure 12-5. Current Exclusions Pane	147
Figure 12-6. Right-click a Column Heading to Hide or Show Columns.	148
Figure 12-7. Selecting a Line in the Missed Coverage Pane	150
Figure 12-8. Coverage Statistics in the Source Window	150
Figure 12-9. Coverage Numbers Shown by Hovering the Mouse Pointer	151
Figure 12-10. Toggle Coverage in the Objects Pane	152
Figure 12-11. Excluding a File Using Menus in the Workspace.	153
Figure 12-12. Coverage Report Dialog	155
Figure 13-1. First dialog of the Waveform Comparison Wizard.	160
Figure 13-2. Second dialog of the Waveform Comparison Wizard	160

Figure 13-3. Comparison information in the Workspace and Objects panes	161
Figure 13-4. Comparison objects in the Wave window.....	162
Figure 13-5. The compare icons	162
Figure 13-6. Compare differences in the List window	163
Figure 13-7. Coverage data saved to a text file	164
Figure 13-8. Displaying Log Files in the Open dialog	165
Figure 13-9. Reloading saved comparison data.	165
Figure 14-1. A Dataset in the Main Window Workspace	171
Figure 14-2. Buttons Added to the Main Window Toolbar.....	173

List of Tables

Table 1-1. Where to Find Our Documentation	15
Table 2-1. Conceptual Overview	19
Table 3-1. The Main Window	36
Table 6-1. Supported Operating Systems for SystemC	66
Table 11-1. Columns in the Profile Window	136
Table 12-1. Coverage Icons in the Source Window	151

Assumptions

We assume that you are familiar with the use of your operating system. You should also be familiar with the window management functions of your graphic interface: OpenWindows, OSF/Motif, CDE, KDE, GNOME, or Microsoft Windows 2000/XP.

We also assume that you have a working knowledge of the language in which your design and/or testbench is written (i.e., VHDL, Verilog, SystemC, etc.). Although ModelSim™ is an excellent tool to use while learning HDL concepts and practices, this document is not written to support that goal.

Where to Find Our Documentation

ModelSim documentation is available from our website at

www.model.com/support

or from the tool in the following formats and locations:

Table 1-1. Where to Find Our Documentation

Document	Format	How to get it
<i>Installation & Licensing Guide</i>	PDF	Help > PDF Bookcase
	HTML	Help > Help & Manuals displays the InfoHub Select the Release Management tab
<i>Quick Guide</i> (command and feature quick-reference)	PDF	Help > PDF Bookcase
<i>Tutorial</i>	PDF	Help > PDF Bookcase
	HTML	Help > Help & Manuals displays the InfoHub Select the Support & Training tab
<i>User's Manual</i>	PDF	Help > PDF Bookcase
	HTML	Help > Help & Manuals displays the InfoHub Select the Help & Manuals tab

Table 1-1. Where to Find Our Documentation

Document	Format	How to get it
<i>Reference Manual</i>	PDF	Help > PDF Bookcase
	HTML	Help > Help & Manuals displays the InfoHub Select the Help & Manuals tab
<i>Foreign Language Interface Manual</i>	PDF	Help > PDF Bookcase
	HTML	Help > Help & Manuals displays the InfoHub Select the Help & Manuals tab
Std_DevelopersKit User's Manual	PDF	www.model.com/support/documentation/BOOK/sdk_um.pdf The Standard Developer's Kit is for use with Mentor Graphics QuickHDL.
Command Help	ASCII	type help [command name] at the prompt in the Transcript pane
Error message help	ASCII	type verror <msgNum> at the Transcript or shell prompt
Tcl Man Pages (Tcl manual)	HTML	select Help > Tcl Man Pages , or find <i>contents.htm</i> in \modeltech\docs\tcl_help_html
Technotes	HTML	available from the support site

Download a Free PDF Reader With Search

ModelSim PDF documentation requires an Adobe Acrobat Reader for viewing. The Reader is available without cost from Adobe at

www.adobe.com.

Acrobat Reader allows you to take advantage of the index file supplied with our documentation; the index makes searching for keywords much faster.

Technical Support and Updates

Support

Online and email technical support options, maintenance renewal, and links to international support contacts:

www.model.com/support/default.asp

Updates

Access to the most current version of ModelSim:

www.model.com/downloads/default.asp

Latest Version Email

Place your name on our list for email notification of news and updates:

ww.model.com/products/informant.asp

Before you Begin

Preparation for some of the lessons leaves certain details up to you. You will decide the best way to create directories, copy files, and execute programs within your operating system. (When you are operating the simulator within ModelSim's GUI, the interface is consistent for all platforms.)

Examples show Windows path separators - use separators appropriate for your operating system when trying the examples.

Example Designs

ModelSim comes with Verilog and VHDL versions of the designs used in these lessons. This allows you to do the tutorial regardless of which license type you have. Though we have tried to minimize the differences between the Verilog and VHDL versions, we could not do so in all cases. In cases where the designs differ (e.g., line numbers or syntax), you will find language-specific instructions. Follow the instructions that are appropriate for the language that you are using.

Chapter 2

Conceptual Overview

Introduction

ModelSim is a verification and simulation tool for VHDL, Verilog, SystemVerilog, SystemC, and mixed-language designs.

This lesson provides a brief conceptual overview of the ModelSim simulation environment. It is divided into five topics, which you will learn more about in subsequent lessons:

Table 2-1. Conceptual Overview

Topic	Additional information and practice
Design Optimizations	Refer to the Optimizing Designs with vopt chapter in the ModelSim User's Manual
Basic simulation flow	Chapter 3 Basic Simulation
Project flow	Chapter 4 Projects
Multiple library flow	Chapter 5 Working With Multiple Libraries
Debugging tools	Remaining lessons

Design Optimizations

Before discussing the basic simulation flow, it is important to understand design optimization. By default, ModelSim optimizations are automatically performed on all designs. These optimizations are designed to maximize simulator performance, yielding improvements up to 10X, in some Verilog designs, over non-optimized runs.

Global optimizations, however, may have an impact on the visibility of the design simulation results you can view – certain signals and processes may not be visible. If these signals and processes are important for debugging the design, it may be necessary to customize the simulation by removing optimizations from specific modules.


It is important, therefore, to make an informed decision as to how best to apply optimizations to your design. The tool that performs global optimizations in ModelSim is called [vopt](#). Please refer to the [Optimizing Designs with vopt](#) chapter in the ModelSim User's Manual for a complete discussion of optimization tradeoffs and customizations. For details on command syntax and usage, please refer to [vopt](#) in the Reference Manual.

In this tutorial, all lessons are performed with default optimizations disabled. Instructions for disabling optimizations appear in each lesson.

Basic Simulation Flow

The following diagram shows the basic steps for simulating a design in ModelSim.

Figure 2-1. Basic Simulation Flow

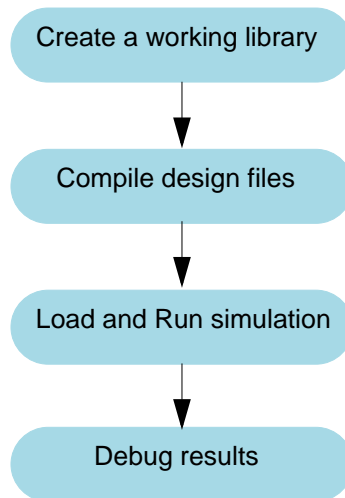

- **Creating the Working Library**

In ModelSim, all designs are compiled into a library. You typically start a new simulation in ModelSim by creating a working library called "work". "Work" is the library name used by the compiler as the default destination for compiled design units.

- **Compiling Your Design**

After creating the working library, you compile your design units into it. The ModelSim library format is compatible across all supported platforms. You can simulate your design on any platform without having to recompile your design.

- **Loading the Simulator with Your Design and Running the Simulation**

With the design compiled, you load the simulator with your design by invoking the simulator on a top-level module (Verilog) or a configuration or entity/architecture pair (VHDL).

Assuming the design loads successfully, the simulation time is set to zero, and you enter a run command to begin simulation.

- **Debugging Your Results**


If you don't get the results you expect, you can use ModelSim's robust debugging environment to track down the cause of the problem.

Project Flow

A project is a collection mechanism for an HDL design under specification or test. Even though you don't have to use projects in ModelSim, they may ease interaction with the tool and are useful for organizing files and specifying simulation settings.

The following diagram shows the basic steps for simulating a design within a ModelSim project.

Figure 2-2. Project Flow

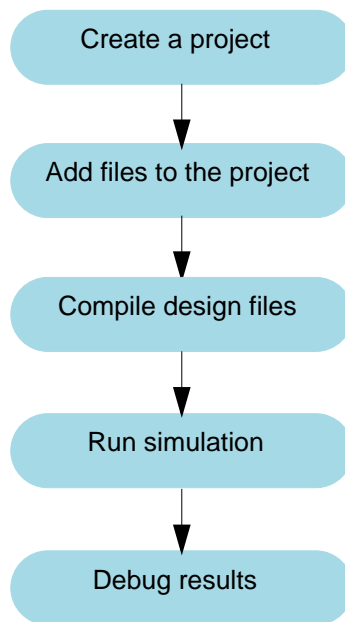

As you can see, the flow is similar to the basic simulation flow. However, there are two important differences:

- You do not have to create a working library in the project flow; it is done for you automatically.
- Projects are persistent. In other words, they will open every time you invoke ModelSim unless you specifically close them.


Multiple Library Flow

ModelSim uses libraries in two ways: 1) as a local working library that contains the compiled version of your design; 2) as a resource library. The contents of your working library will change as you update your design and recompile. A resource library is typically static and serves as a parts source for your design. You can create your own resource libraries, or they may be supplied by another design team or a third party (e.g., a silicon vendor).

You specify which resource libraries will be used when the design is compiled, and there are rules to specify in which order they are searched. A common example of using both a working library and a resource library is one where your gate-level design and testbench are compiled into the working library, and the design references gate-level models in a separate resource library.

The diagram below shows the basic steps for simulating with multiple libraries.

Figure 2-3. Multiple Library Flow

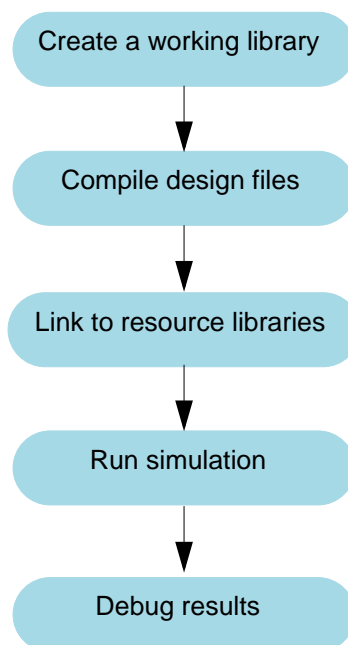

You can also link to resource libraries from within a project. If you are using a project, you would replace the first step above with these two steps: create the project and add the testbench to the project.

Debugging Tools


ModelSim offers numerous tools for debugging and analyzing your design. Several of these tools are covered in subsequent lessons, including:

- Using projects
- Working with multiple libraries
- Simulating with SystemC
- Setting breakpoints and stepping through the source code
- Viewing waveforms and measuring time
- Exploring the "physical" connectivity of your design
- Viewing and initializing memories
- Creating stimulus with the Waveform Editor
- Analyzing simulation performance
- Testing code coverage
- Comparing waveforms
- Automating simulation

Introduction

In this lesson you will go step-by-step through the basic simulation flow:

Figure 3-1. Basic Simulation Flow

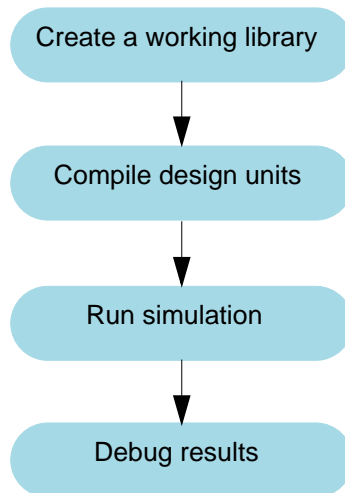

Design Files for this Lesson

The sample design for this lesson is a simple 8-bit, binary up-counter with an associated testbench. The pathnames are as follows:

Verilog – `<install_dir>/examples/tutorials/verilog/basicSimulation/counter.v` and `tcounter.v`

VHDL – `<install_dir>/examples/tutorials/vhdl/basicSimulation/counter.vhd` and `tcounter.vhd`

This lesson uses the Verilog files `counter.v` and `tcounter.v`. If you have a VHDL license, use `counter.vhd` and `tcounter.vhd` instead. Or, if you have a mixed license, feel free to use the Verilog testbench with the VHDL counter or vice versa.

Related Reading

User's Manual Chapters: [Design Libraries](#), [Verilog and SystemVerilog Simulation](#), and [VHDL Simulation](#).

Reference Manual commands: [vlib](#), [vmap](#), [vlog](#), [vcom](#), [vopt](#), [view](#), and [run](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode, the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

Note



When you have completed the tutorial, remeber to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Creating the Working Design Library

Before you can simulate a design, you must first create a library and compile the source code into that library.

1. Create a new directory and copy the design files for this lesson into it.

Start by creating a new directory for this exercise (in case other users will be working with these lessons).

Verilog: Copy *counter.v* and *tcounter.v* files from
/<install_dir>/examples/tutorials/verilog/basicSimulation to the new directory.


VHDL: Copy *counter.vhd* and *tcounter.vhd* files from
/<install_dir>/examples/tutorials/vhdl/basicSimulation to the new directory.

2. Start ModelSim *if necessary*.
 - a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.

Upon opening ModelSim for the first time, you will see the Welcome to ModelSim dialog. Click **Close**.
 - b. Select **File > Change Directory** and change to the directory you created in step 1.
3. Create the working library.
 - a. Select **File > New > Library**.

This opens a dialog where you specify physical and logical names for the library ([Figure 3-2](#)). You can create a new library or map to an existing library. We'll be doing the former.

Figure 3-2. The Create a New Library Dialog

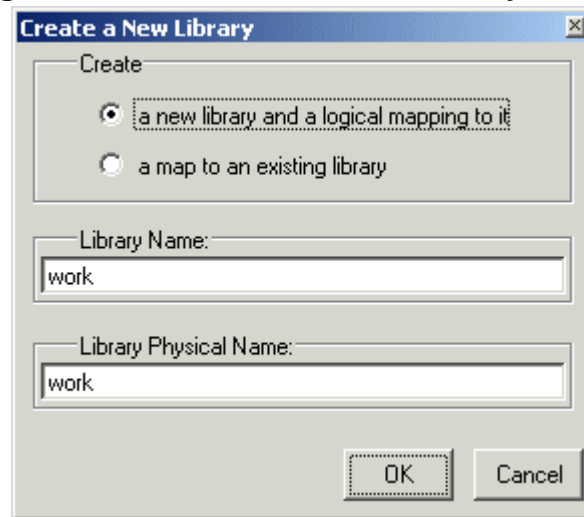


- b. Type **work** in the Library Name field if it isn't entered automatically.
- c. Click **OK**.

ModelSim creates a directory called *work* and writes a specially-formatted file named *_info* into that directory. The *_info* file must remain in the directory to distinguish it as a ModelSim library. Do not edit the folder contents from your operating system; all changes should be made from within ModelSim.

ModelSim also adds the library to the list in the Workspace ([Figure 3-3](#)) and records the library mapping for future reference in the ModelSim initialization file (*modelsim.ini*).

Figure 3-3. work Library in the Workspace

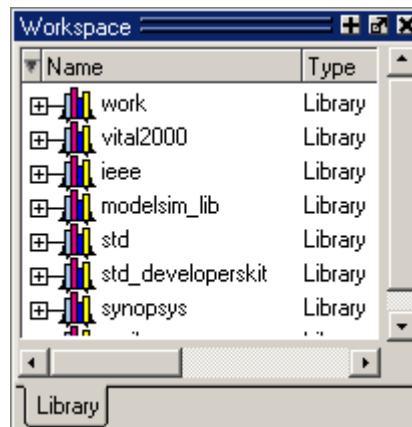

When you pressed OK in step 3c above, the following was printed to the Transcript:

```
vlib work
vmap work work
```

These two lines are the command-line equivalents of the menu selections you made. Many command-line equivalents will echo their menu-driven functions in this fashion.

Compiling the Design

With the working library created, you are ready to compile your source files.


You can compile by using the menus and dialogs of the graphic interface, as in the Verilog example below, or by entering a command at the ModelSim> prompt.

1. Compile *counter.v* and *tcounter.v*.
 - a. Select **Compile > Compile**. This opens the Compile Source Files dialog (Figure 3-4).

If the Compile menu option is not available, you probably have a project open. If so, close the project by making the Workspace pane active and selecting **File > Close** from the menus.


- b. Select both *counter.v* and *tcounter.v* modules from the Compile Source Files dialog and click **Compile**. The files are compiled into the *work* library.
- c. Click **Done**.

Figure 3-4. Compile Source Files Dialog

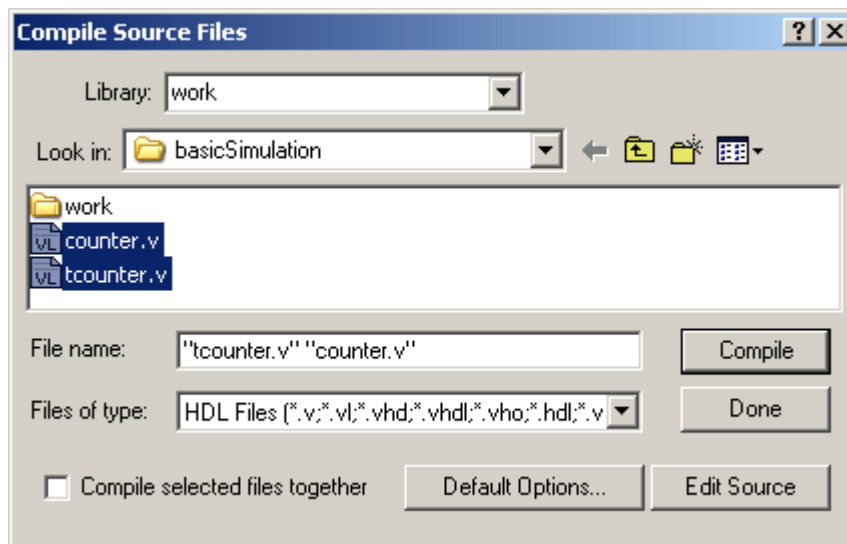

2. View the compiled design units.
 - a. On the Library tab, click the '+' icon next to the *work* library and you will see two design units (Figure 3-5). You can also see their types (Modules, Entities, etc.) and the path to the underlying source files (scroll to the right if necessary).

Figure 3-5. Verilog Modules Compiled into work Library

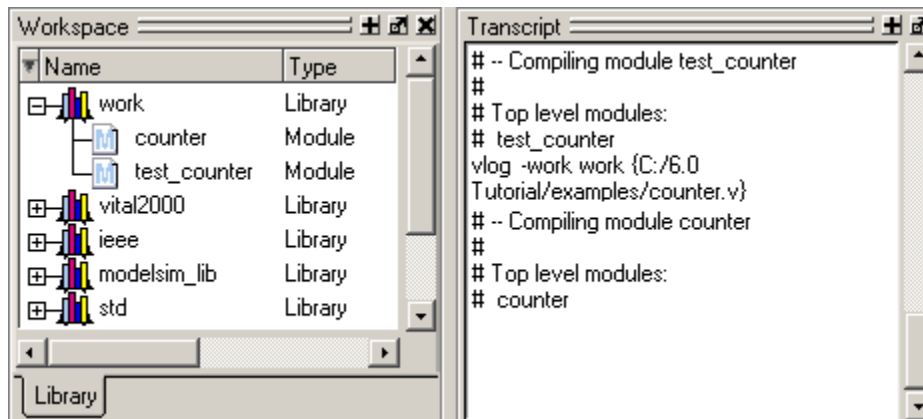


Loading the Design into the Simulator

1. Load the *test_counter* module into the simulator.
 - a. Double-click *test_counter* in the Main window Workspace to load the design.

You can also load the design by selecting **Simulate > Start Simulation** in the menu bar. This opens the Start Simulation dialog. With the Design tab selected, click the '+' sign next to the work library to see the *counter* and *test_counter* modules. Select the *test_counter* module and click OK ([Figure 3-6](#)).


Figure 3-6. Loading Design with Start Simulation Dialog

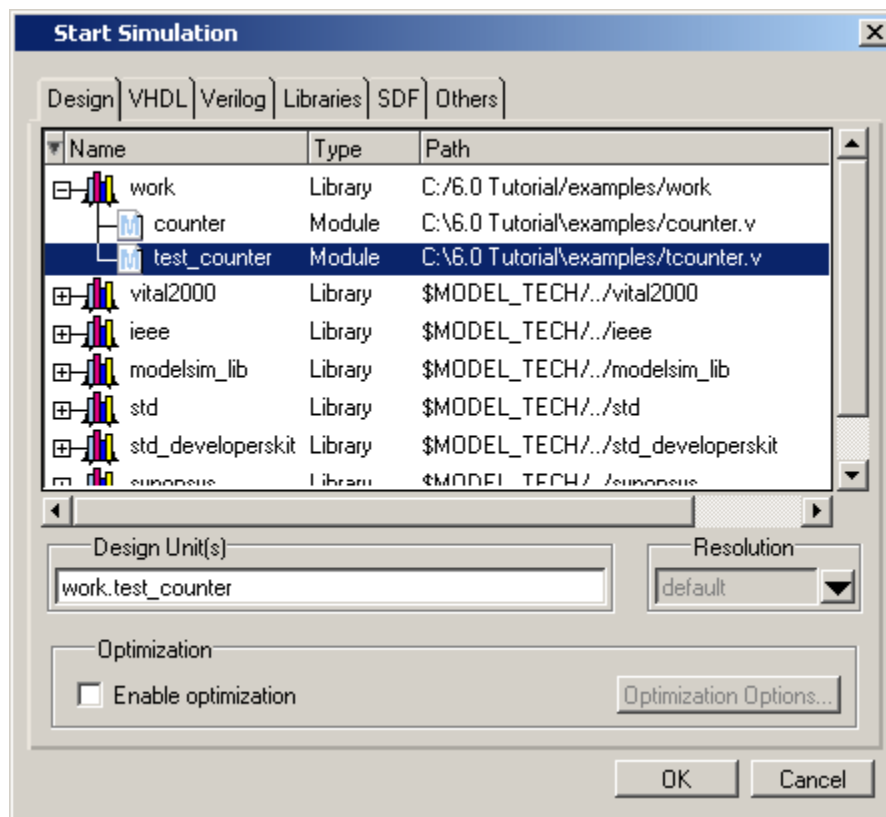

The command line equivalent for loading this design is:

```
vsim test_counter
```

When the design is loaded, you will see a new tab in the Workspace named *sim* that displays the hierarchical structure of the design (Figure 3-7). You can navigate within the hierarchy by clicking on any line with a '+' (expand) or '-' (contract) icon. You will also see a tab named *Files* that displays all files included in the design.

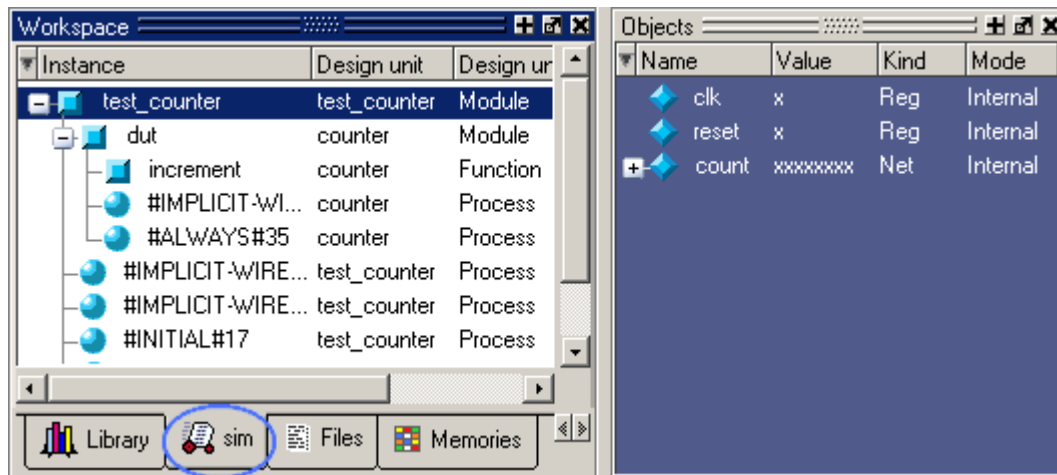Figure 3-7. Workspace and Objects Panes Showing a Verilog Design

The Objects pane opens by default when a design is loaded. It shows the names and current values of data objects in the current region (selected in the Workspace). Data objects include signals, nets, registers, constants and variables not declared in a process, generics, parameters, and member data variables of a SystemC module.

Running the simulation

Now you will run the simulation.


1. Set the graphic user interface to view the Wave debugging pane in the Main window.
 - a. Enter **view wave** at the command line.

This opens one of several panes available for debugging. To see a list of the other panes, select the **View** menu. The debugging windows will open as panes within the Main window. You may need to move or resize the windows to your liking. Panes within the Main window can be zoomed to occupy the entire Main window or undocked to stand alone. For details, see [Navigating the Interface](#).

2. Add signals to the Wave window.
 - a. In the Workspace pane, select the **sim** tab.
 - b. Right-click *test_counter* to open a popup context menu.
 - c. Select **Add > Add All Signals to Wave** ([Figure 3-8](#)).

All signals in the design are added to the Wave window.

Figure 3-8. Using Menus to Add Signals to Wave Window

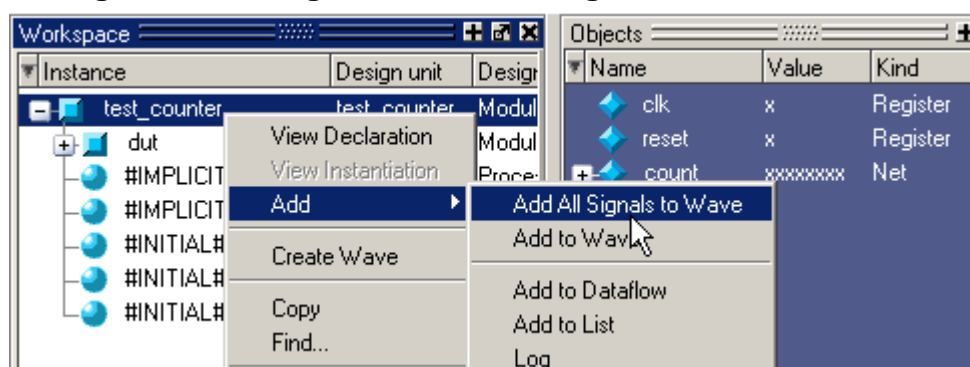

3. Run the simulation.

- a. Click the Run icon in the Main or Wave window toolbar.


The simulation runs for 100 ns (the default simulation length) and waves are drawn in the Wave window.



- b. Type **run 500** at the VSIM> prompt in the Main window.

The simulation advances another 500 ns for a total of 600 ns (Figure 3-9).

Figure 3-9. Waves Drawn in Wave Window

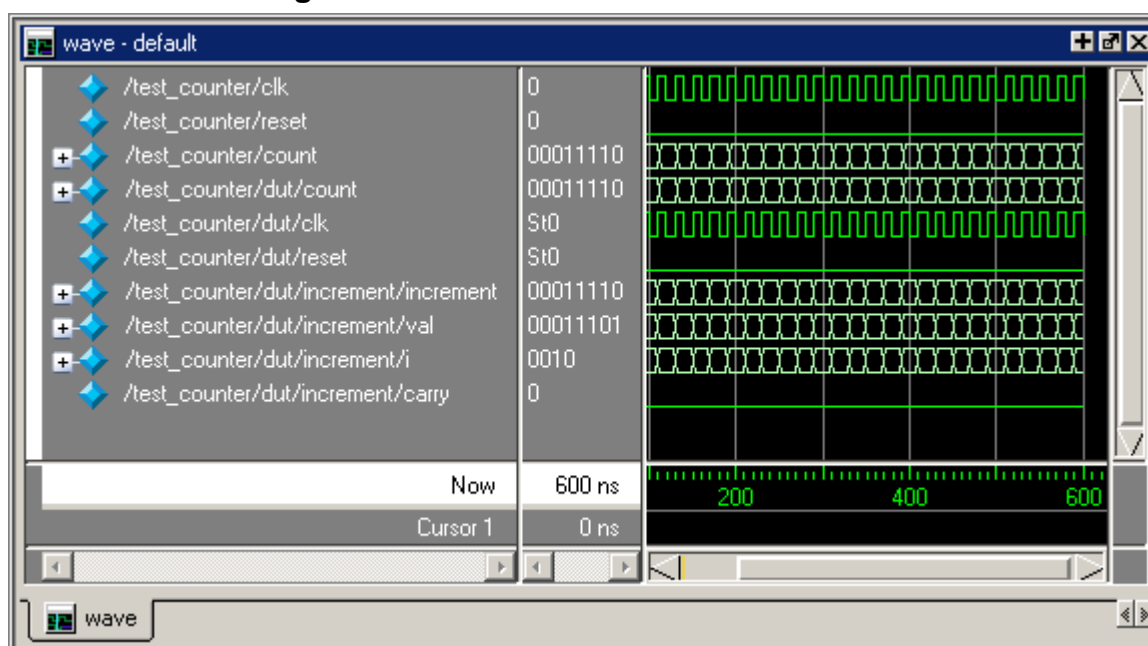

- c. Click the **Run -All** icon on the Main or Wave window toolbar.

The simulation continues running until you execute a break command or it hits a statement in your code (e.g., a Verilog \$stop statement) that halts the simulation.



- d. Click the Break icon.

The simulation stops running.




Setting Breakpoints and Stepping in the Source Window

Next you will take a brief look at one interactive debugging feature of the ModelSim environment. You will set a breakpoint in the Source window, run the simulation, and then step through the design under test. Breakpoints can be set only on lines with red line numbers.

1. Open *counter.v* in the Source window.
 - a. Select the **Files** tab in the Main window Workspace.
 - b. Click the + sign next to the *sim* filename to see the contents of *vsim.wlf*.
 - c. Double-click *counter.v* to open it in the Source window.
2. Set a breakpoint on line 36 of *counter.v* (or, line 36 of *counter.vhd* if you are simulating the VHDL files).
 - a. Scroll to line 36 and click on the line number.

A red ball appears next to the line number (Figure 3-10), indicating that a breakpoint has been set.

Figure 3-10. Setting Breakpoint in Source Window

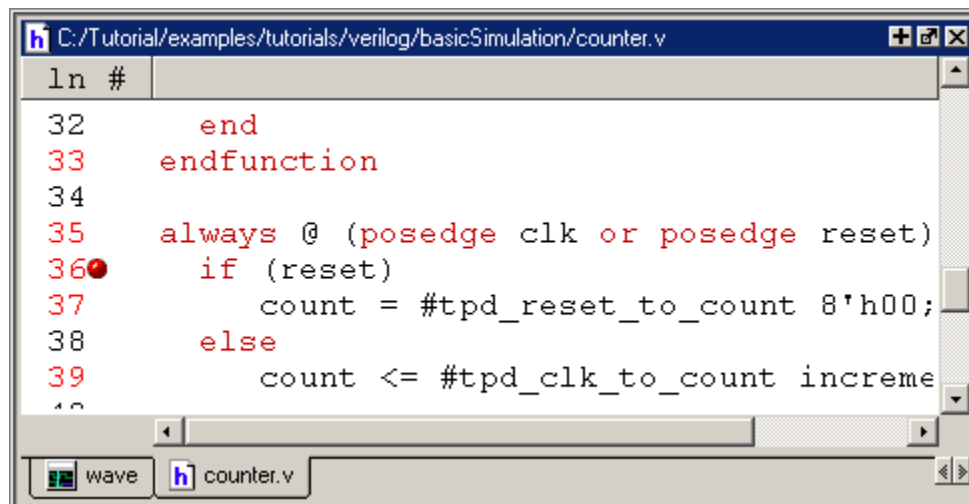


3. Disable, enable, and delete the breakpoint.
 - a. Click the red ball to disable the breakpoint. It will become a black circle.
 - b. Click the black circle again to re-enable the breakpoint. It will become a red ball.

- c. Click the red ball with your right mouse button and select **Remove Breakpoint 36**.
 - d. Click on line number 36 again to re-create the breakpoint.
4. Restart the simulation.
- a. Click the Restart icon to reload the design elements and reset the simulation time to zero.



The Restart dialog that appears gives you options on what to retain during the restart (Figure 3-11).

Figure 3-11. Setting Restart Functions

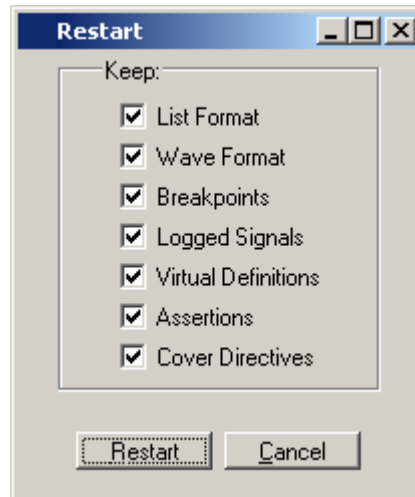


- b. Click the **Restart** button in the Restart dialog.
- c. Click the Run -All icon.



The simulation runs until the breakpoint is hit. When the simulation hits the breakpoint, it stops running, highlights the line with a blue arrow in the Source view (Figure 3-12), and issues a Break message in the Transcript pane.


Figure 3-12. Blue Arrow Indicates Where Simulation Stopped.

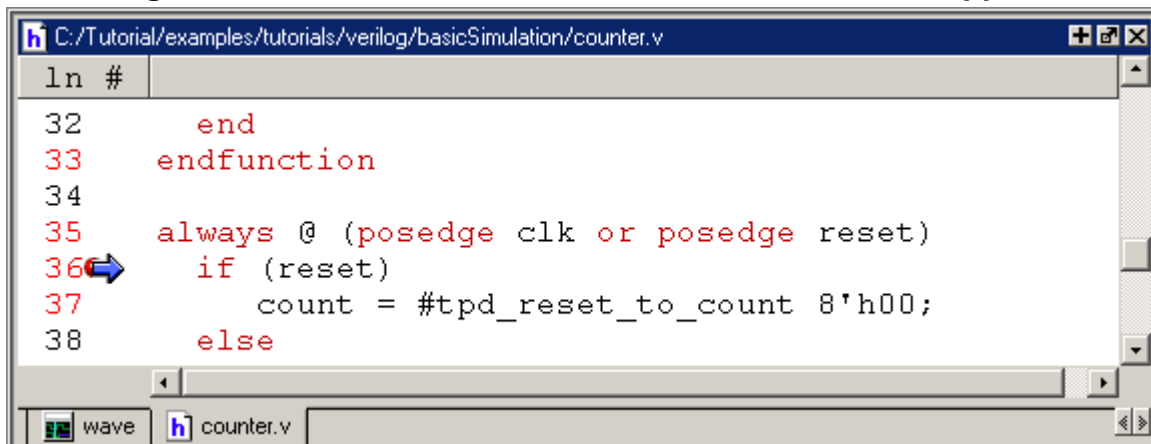

When a breakpoint is reached, typically you want to know one or more signal values. You have several options for checking values:

- look at the values shown in the Objects window (Figure 3-13).


Figure 3-13. Values Shown in Objects Window

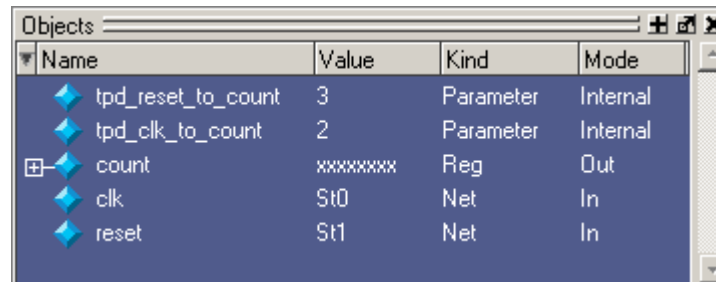

Name	Value	Kind	Mode
tpd_reset_to_count	3	Parameter	Internal
tpd_clk_to_count	2	Parameter	Internal
count	xxxxxxxx	Reg	Out
clk	St0	Net	In
reset	St1	Net	In

- set your mouse pointer over a variable in the Source window and a yellow box will appear with the variable name and the value of that variable at the time of the selected cursor in the Wave window
- highlight a variable in the Source window, right-click it, and select Examine from the pop-up menu to display the variable and its current value in a Source Examine window (Figure 3-14)

Figure 3-14. Variable Name and Value in Source Examine Window

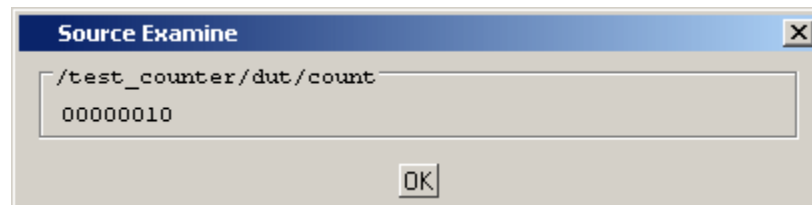

- use the **examine** command at the VSIM> prompt to output a variable value to the Main window Transcript (i.e., `examine count`)
5. Try out the step commands.
- a. Click the Step icon on the Main window toolbar.

This single-steps the debugger.




Experiment on your own. Set and clear breakpoints and use the Step, Step Over, and Continue Run commands until you feel comfortable with their operation.

Navigating the Interface

The Main window is composed of a number of "panes" and sub-windows that display various types of information about your design, simulation, or debugging session. You can also access

other tools from the Main window that display in stand-alone windows (e.g., the Dataflow window).

Figure 3-15. The Main Window

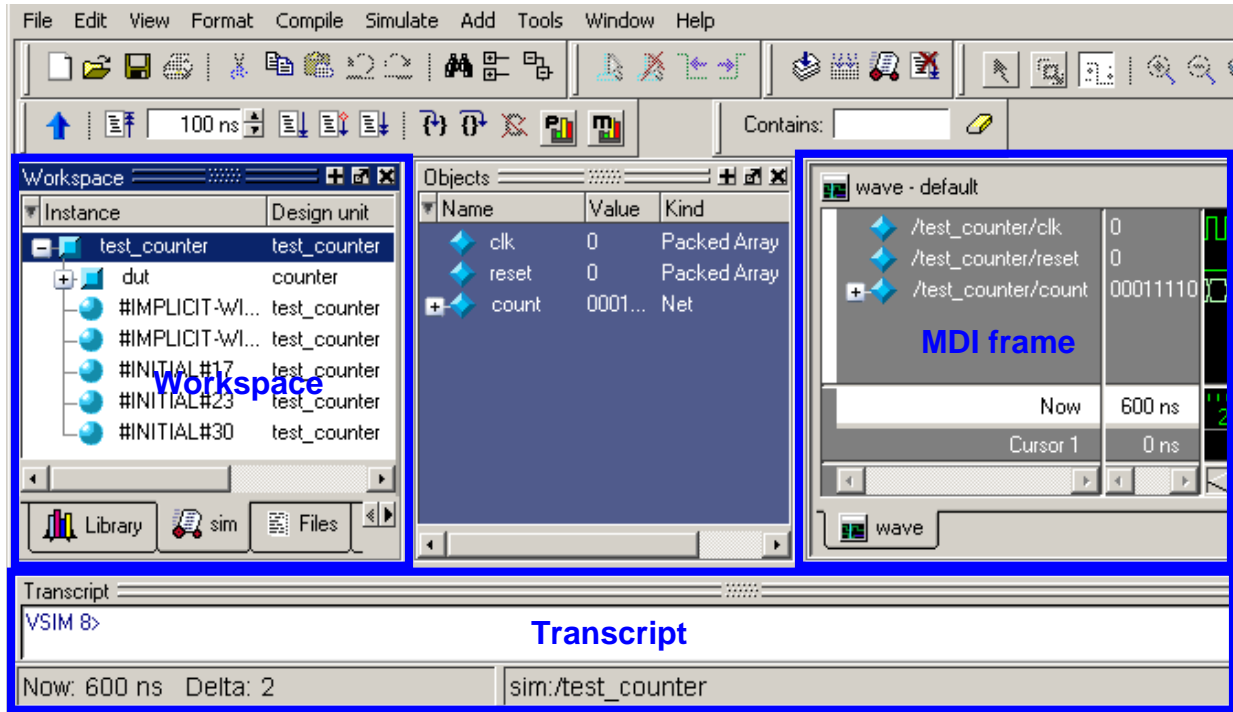

The following table describes some of the key elements of the Main window.

Table 3-1. The Main Window

Window/pane	Description
Workspace	This pane comprises multiple tabs that contain various sorts of information about the current project or design. Once a design is loaded, additional tabs will appear. Refer to the section Workspace in the User's Manual for more information.
Transcript	The Transcript pane provides a command-line interface and serves as an activity log including status and error messages. Refer to the section Transcript in the User's Manual for more information.

Table 3-1. The Main Window

Window/pane	Description
MDI frame	The Multiple Document Interface (MDI) frame holds windows for which there can be multiple instances. These include Source editor windows, Wave windows, and Memory content windows. Refer to the section Multiple Document Interface (MDI) Frame in the User's Manual for more information.

Here are a few important points to keep in mind about the ModelSim interface:

- Windows/panes can be resized, moved, zoomed, undocked, etc. and the changes are persistent.


You have a number of options for re-sizing, re-positioning, undocking/redocking, and generally modifying the physical characteristics of windows and panes. When you exit ModelSim, the current layout is saved so that it appears the same the next time you invoke the tool. Refer to the section [Main Window](#) in the User's Manual for more information.

- Menus are context sensitive.

The menu items that are available and how certain menu items behave depend on which pane or window is active. For example, if the *sim* tab in the Workspace is active and you choose Edit from the menu bar, the Clear command is disabled. However, if you click in the Transcript pane and choose Edit, the Clear command is enabled. The active pane is denoted by a blue title bar.


Let us try a few things.


1. Zoom and undock panes.
 - a. Click the Zoom/Unzoom icon in the upper right corner of the Workspace pane ([Figure 3-16](#)).

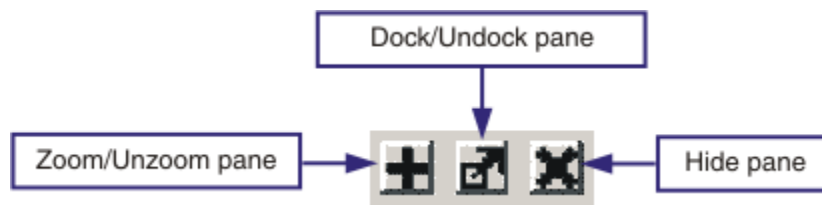Figure 3-16. Window/Pane Control Icons

The pane fills the entire Main window ([Figure 3-17](#)).


Figure 3-17. zooming in on Workspace Pane

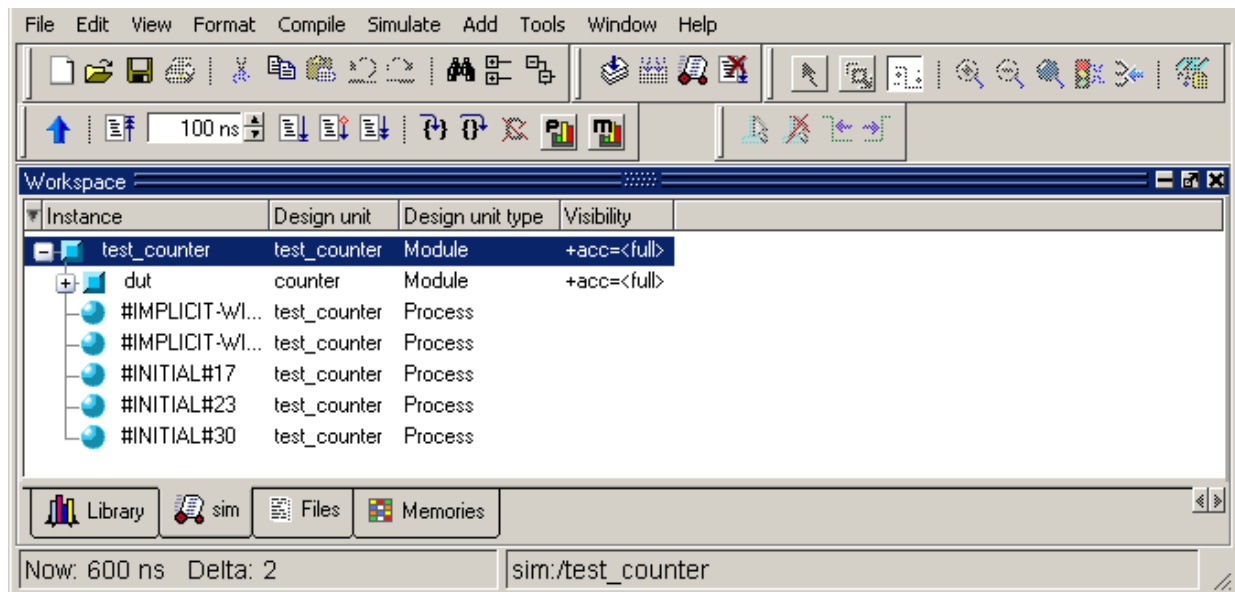

- b. Click the Unzoom icon in the Workspace.
 - c. Click the Undock icon in the upper right corner of the Transcript pane.
The Transcript becomes a stand-alone window.
 - d. Click the Dock icon on the Transcript.
 - e. Click the Hide pane icon in the Workspace.
 - f. Select **View > Workspace** from the menus to re-open the Workspace.
2. Move and resize panes.
 - a. Hover your mouse pointer in the center of the Transcript title bar, where the two parallel lines are interrupted by 3 lines of small dots. This is the handle for the pane. When the cursor is over the pane handle it becomes a four-headed arrow. 
 - b. Click and drag the Transcript up and to the right until you see a gray outline on the right-hand side of the MDI frame.

When you let go of the mouse button, the Transcript is moved and the MDI frame and Workspace panes shift to the left ([Figure 3-18](#)).

Figure 3-18. Panes Rearranged in Main Window

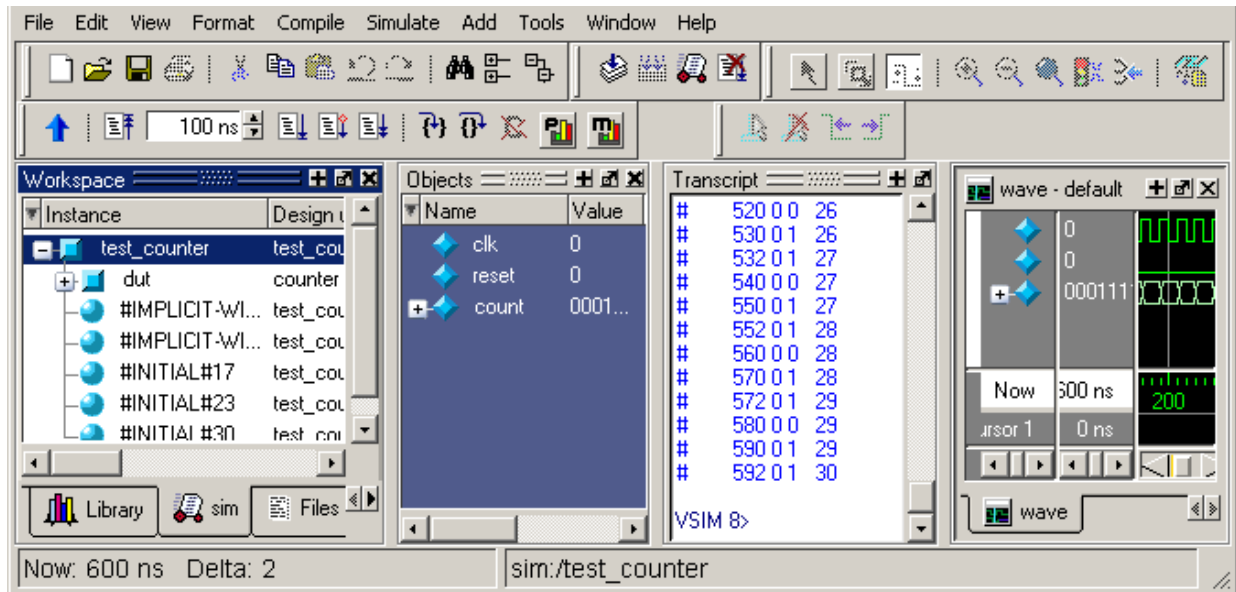

- c. Select **Layout > Reset**.

The layout returns to its original setting.

i **Tip:** Moving panes can get confusing, and you may not always obtain the results you expect. Practice moving a pane around, watching the gray outline to see what happens when you drop it in various places. Your layout will be saved when you exit ModelSim and will reappear when you next open ModelSim. (It's a good idea to close all panes in the MDI frame at the end of each lesson in this tutorial so only files relevant to each lesson will be displayed.)

As you practice, notice that the MDI frame cannot be moved in the same manner as the panes. It does not have a handle in its header bar.

Selecting **Layout > Reset** is the easiest way to rectify an undesired layout.

- d. Hover your mouse pointer on the border between two panes so it becomes a double-headed arrow. \longleftrightarrow
- e. Click-and-drag left and right or up and down to resize the pane.
- f. Select **Layout > Reset**.
3. Observe context sensitivity of menu commands.
 - a. Click anywhere in the Workspace.
 - b. Select the Edit menu and notice that the **Clear** command is disabled.

- c. Click in the Transcript and select **Edit > Clear**.

This command applies to the Transcript pane but not the Workspace pane.

- d. Click on a design object in the sim tab of the Workspace and select **File > Open**.
- e. Notice that the Open dialog filters to show Log files (*.wlf).
- f. Now click on a filename in the Files tab of the Workspace and select **File > Open**.

Notice that the Open dialog filters to show HDL file types instead.

Lesson Wrap-Up

This concludes this lesson. Before continuing we need to end the current simulation.

1. Select **Simulate > End Simulation**.
2. Click **Yes** when prompted to confirm that you wish to quit simulating.

Introduction

In this lesson you will practice creating a project.

At a minimum, projects have a work library and a session state that is stored in a *.mpf* file. A project may also consist of:

- HDL source files or references to source files
- other files such as READMEs or other project documentation
- local libraries
- references to global libraries

Design Files for this Lesson

The sample design for this lesson is a simple 8-bit, binary up-counter with an associated testbench. The pathnames are as follows:

Verilog – *<install_dir>/examples/tutorials/verilog/projects/counter.v* and *tcounter.v*

VHDL – *<install_dir>/examples/tutorials/vhdl/projects/counter.vhd* and *tcounter.vhd*

This lesson uses the Verilog files *tcounter.v* and *counter.v*. If you have a VHDL license, use *tcounter.vhd* and *counter.vhd* instead.

Related Reading

User's Manual Chapter: [Projects](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

Note



When you have completed the tutorial, remeber to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Creating a New Project

1. Create a new directory and copy the design files for this lesson into it.

Start by creating a new directory for this exercise (in case other users will be working with these lessons).


Verilog: Copy *counter.v* and *tcounter.v* files from
/*<install_dir>/examples/tutorials/verilog/projects* to the new directory.

VHDL: Copy *counter.vhd* and *tcounter.vhd* files from
/*<install_dir>/examples/tutorials/vhdl/projects* to the new directory.

2. If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.
 - a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.
 - b. Select **File > Change Directory** and change to the directory you created in step 1.
3. Create a new project.
 - a. Select **File > New > Project** (Main window) from the menu bar.

This opens the Create Project dialog where you can enter a Project Name, Project Location (i.e., directory), and Default Library Name ([Figure 4-1](#)). You can also reference library settings from a selected .ini file or copy them directly into the project. The default library is where compiled design units will reside.

Figure 4-1. Create Project Dialog

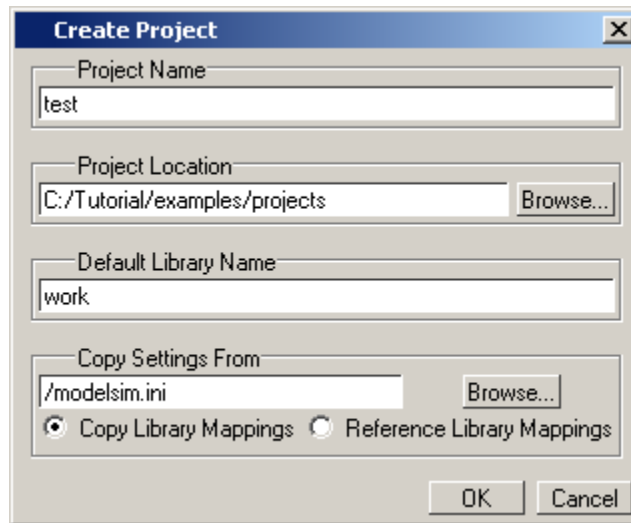


- b. Type **test** in the Project Name field.
- c. Click the **Browse** button for the Project Location field to select a directory where the project file will be stored.
- d. Leave the Default Library Name set to *work*.
- e. Click **OK**.

Adding Objects to the Project

Once you click OK to accept the new project settings, you will see a blank Project tab in the Workspace area of the Main window and the Add items to the Project dialog will appear (Figure 4-2). From this dialog you can create a new design file, add an existing file, add a folder for organization purposes, or create a simulation configuration (discussed below).

Figure 4-2. Adding New Items to a Project

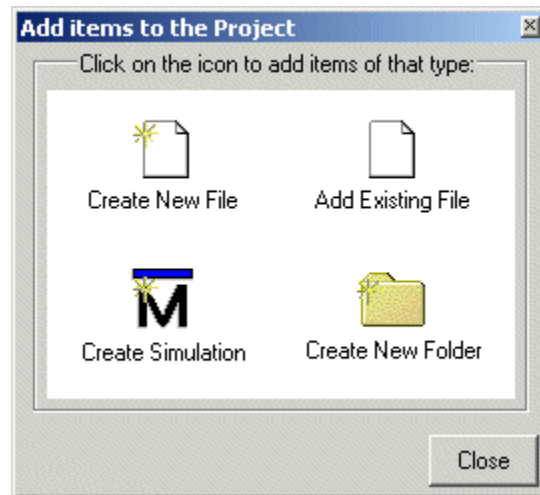

1. Add two existing files.


- a. Click **Add Existing File**.

This opens the Add file to Project dialog (Figure 4-3). This dialog lets you browse to find files, specify the file type, specify a folder to which the file will be added, and identify whether to leave the file in its current location or to copy it to the project directory.

- b. Click the **Browse** button for the File Name field. This opens the “Select files to add to project” dialog and displays the contents of the current directory.
 - c. **Verilog:** Select *counter.v* and *tcounter.v* and click **Open**.
VHDL: Select *counter.vhd* and *tcounter.vhd* and click **Open**.

This closes the “Select files to add to project” dialog and displays the selected files in the “Add file to Project” dialog (Figure 4-3).

Figure 4-3. Add file to Project Dialog

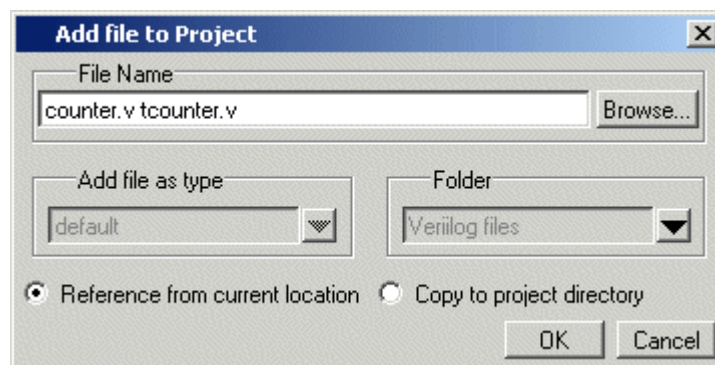


- d. Click **OK** to add the files to the project.

- e. Click **Close** to dismiss the Add items to the Project dialog.

You should now see two files listed in the Project tab of the Workspace pane (Figure 4-4). Question mark icons (?) in the Status column indicate that the file has not been compiled or that the source file has changed since the last successful compile. The other columns identify file type (e.g., Verilog or VHDL), compilation order, and modified date.

Figure 4-4. Newly Added Project Files Display a “?” for Status

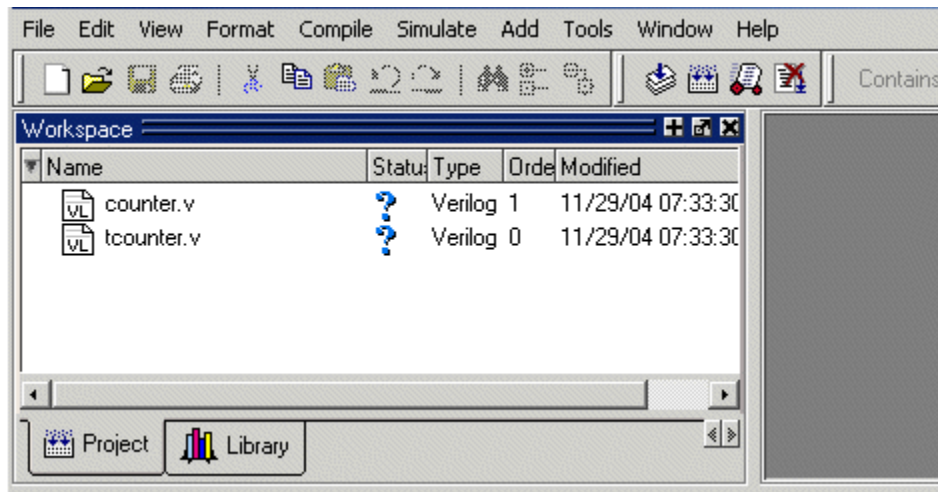


Changing Compile Order (VHDL)

By default ModelSim performs default binding of VHDL designs when you load the design with [vsim](#). However, you can elect to perform default binding at compile time. (For details, refer to the section [Default Binding](#) in the User's Manual.) If you elect to do default binding at compile, then the compile order is important. Follow these steps to change compilation order within a project.

1. Change the compile order.
 - a. Select **Compile > Compile Order**.

This opens the Compile Order dialog box (Figure 4-5).

Figure 4-5. Compile Order Dialog

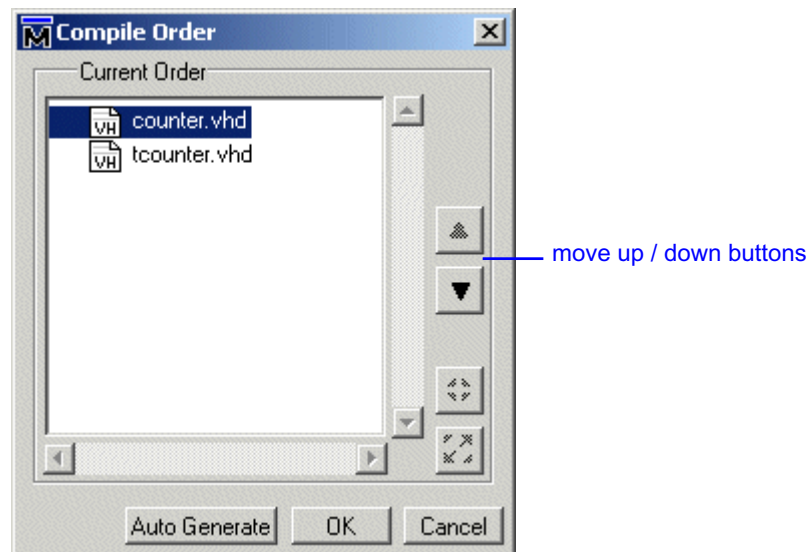

- b. Click the **Auto Generate** button.

ModelSim "determines" the compile order by making multiple passes over the files. It starts compiling from the top; if a file fails to compile due to dependencies, it moves that file to the bottom and then recompiles it after compiling the rest of the files. It continues in this manner until all files compile successfully or until a file(s) can't be compiled for reasons other than dependency.

Alternatively, you can select a file and use the Move Up and Move Down buttons to put the files in the correct order.

- c. Click **OK** to close the Compile Order dialog.

Compiling and Loading a Design


1. Compile the files.
 - a. Right-click anywhere in the Project tab and select **Compile > Compile All** from the pop-up menu.

ModelSim compiles both files and changes the symbol in the Status column to a green check mark. A check mark means the compile succeeded. If compile fails, the symbol will be a red 'X', and you will see an error message in the Transcript pane.

2. View the design units.
 - a. Click the **Library** tab in the workspace (Figure 4-6).
 - b. Click the "+" icon next to the *work* library.

You should see two compiled design units, their types (modules in this case), and the path to the underlying source files.


Figure 4-6. Library Tab with Expanded Library

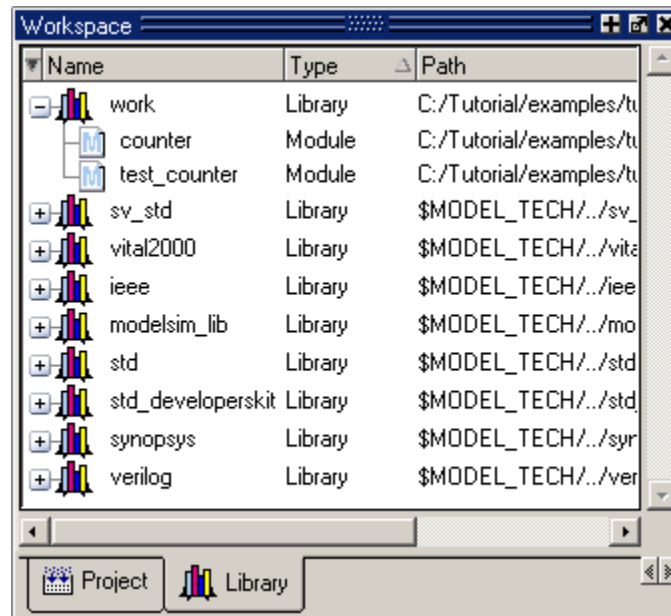

3. Load the *test_counter* design unit.
 - a. Double-click the *test_counter* design unit.

You should see 3 new tabs in the Main window Workspace. The *sim* tab displays the structure of the *test_counter* design unit (Figure 4-7). The *Files* tab contains information about the underlying source files. The *Memories* tab lists all memories in the design.

Figure 4-7. Structure Tab for a Loaded Design

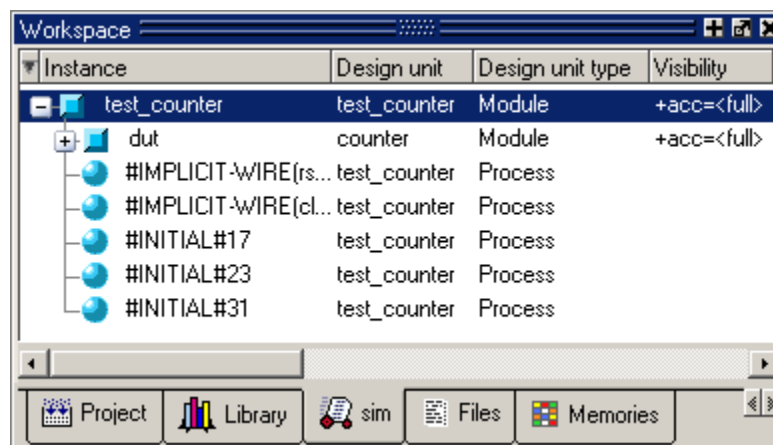

At this point you would typically run the simulation and analyze or debug your design like you did in the previous lesson. For now, you'll continue working with the project. However, first you need to end the simulation that started when you loaded *test_counter*.

4. End the simulation.
 - a. Select **Simulate > End Simulation**.
 - b. Click **Yes**.

Organizing Projects with Folders


If you have a lot of files to add to a project, you may want to organize them in folders. You can create folders either before or after adding your files. If you create a folder before adding files, you can specify in which folder you want a file placed at the time you add the file (see Folder field in [Figure 4-3](#)). If you create a folder after adding files, you edit the file properties to move it to that folder.

Adding Folders

As shown previously in [Figure 4-2](#), the Add items to the Project dialog has an option for adding folders. If you have already closed that dialog, you can use a menu command to add a folder.


1. Add a new folder.
 - a. Right-click inside the Projects tab of the Workspace and select **Add to Project > Folder**.
 - b. Type **Design Files** in the **Folder Name** field ([Figure 4-8](#)).

Figure 4-8. Adding New Folder to Project

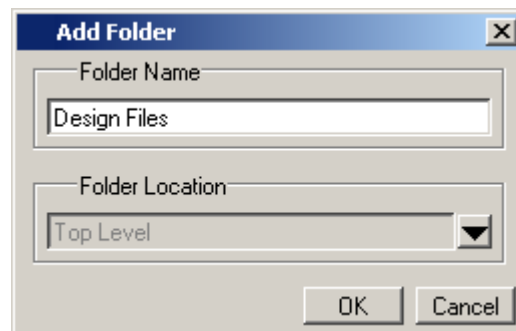


- c. Click **OK**.
 - d. Select the Project tab to see the new folder ([Figure 4-9](#)).

Figure 4-9. A Folder Within a Project

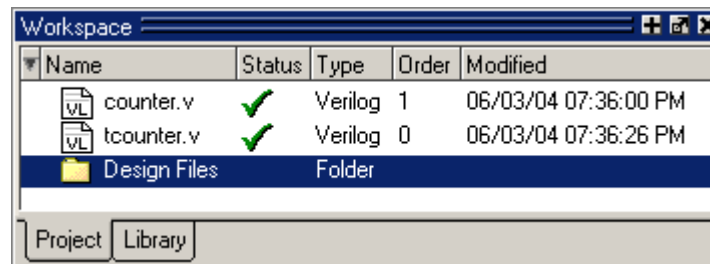

2. Add a sub-folder.
 - a. Right-click anywhere in the Project tab and select **Add to Project > Folder**.
 - b. Type **HDL** in the **Folder Name** field (Figure 4-10).


Figure 4-10. Creating Subfolder

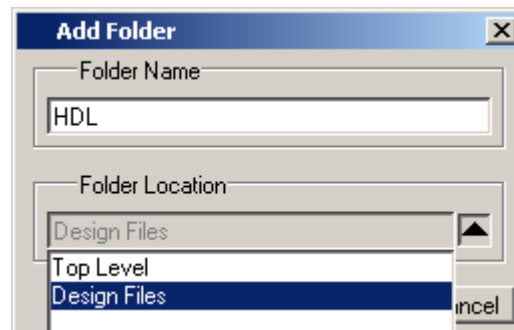

- c. Click the **Folder Location** drop-down arrow and select *Design Files*.
- d. Click OK.

A '+' icon appears next to the *Design Files* folder in the Project tab (Figure 4-11).

Figure 4-11. A folder with a Sub-folder

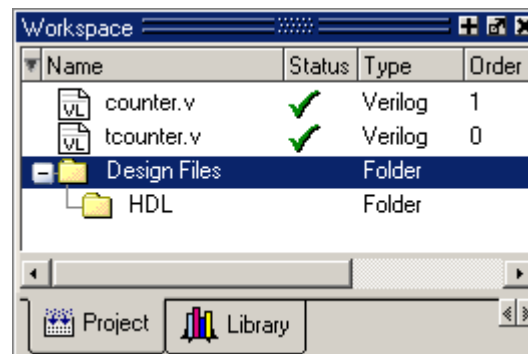

- e. Click the '+' icon to see the *HDL* sub-folder.


Moving Files to Folders

If you don't place files into a folder when you first add the files to the project, you can move them into a folder using the properties dialog.

1. Move *tcounter.v* and *counter.v* to the *HDL* folder.
 - a. Select both *counter.v* and *tcounter.v* in the Project tab of the Workspace.
 - b. Right-click either file and select **Properties**.

This opens the Project Compiler Settings dialog (Figure 4-12), which allows you to set a variety of options on your design files.

Figure 4-12. Changing File Location via the Project Compiler Settings Dialog

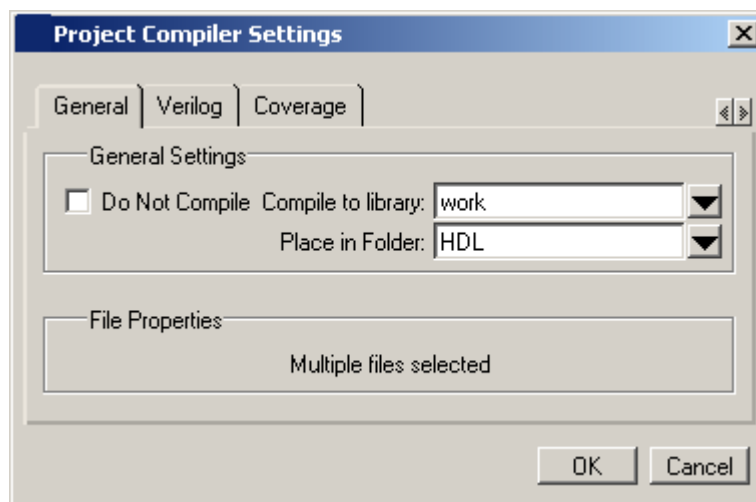

- c. Click the **Place In Folder** drop-down arrow and select *HDL*.
 - d. Click OK.

The selected files are moved into the HDL folder. Click the '+' icon next to the HDL folder to see the files.

The files are now marked with a '?' icon because you moved the files. The project no longer knows if the previous compilation is still valid.

Simulation Configurations


A Simulation Configuration associates a design unit(s) and its simulation options. For example, let's say that every time you load *tcounter.v* you want to set the simulator resolution to picoseconds (ps) and enable event order hazard checking. Ordinarily, you would have to specify those options each time you load the design. With a Simulation Configuration, you specify options for a design and then save a "configuration" that associates the design and its options.

The configuration is then listed in the Project tab and you can double-click it to load *tcounter.v* along with its options.

1. Create a new Simulation Configuration.
 - a. Right-click in the Projects tab and select **Add to Project > Simulation Configuration** from the popup menu.

This opens the Simulate dialog (Figure 4-13). The tabs in this dialog present a myriad of simulation options. You may want to explore the tabs to see what's available. You can consult the ModelSim User's Manual to get a description of each option.

Figure 4-13. Simulation Configuration Dialog

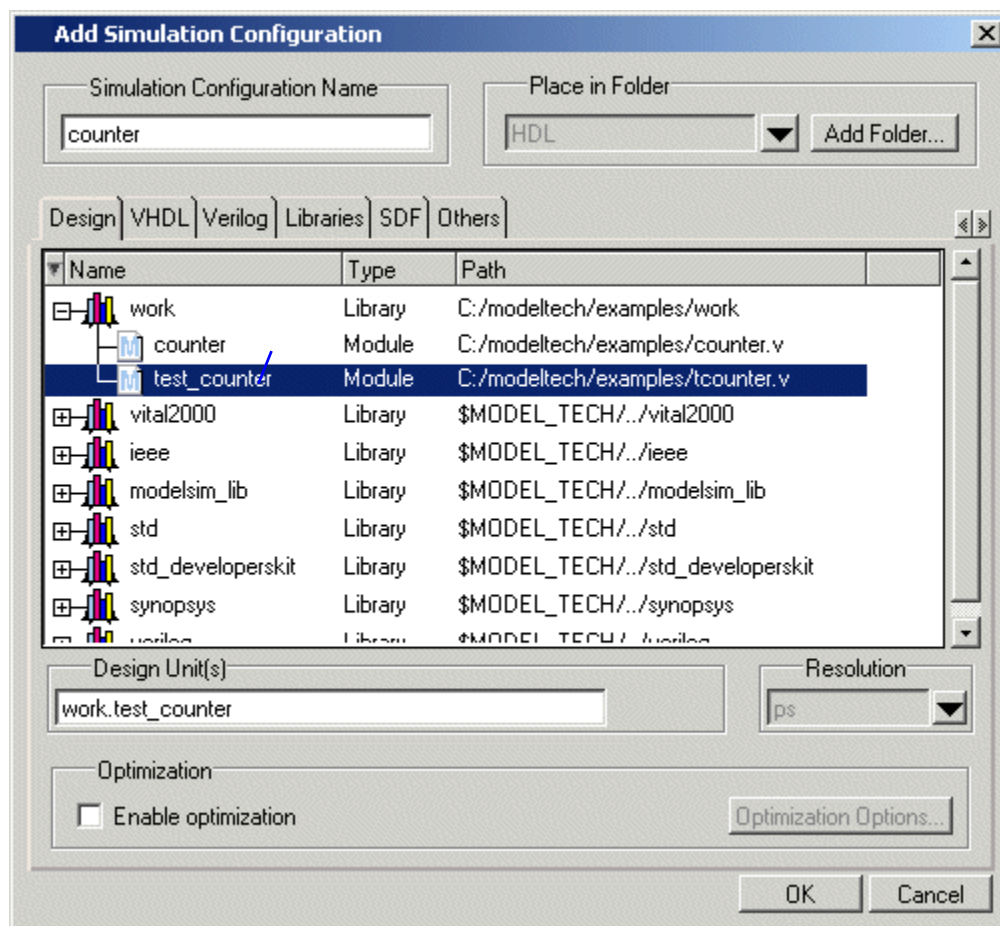


- b. Type **counter** in the **Simulation Configuration Name** field.
 - c. Select **HDL** from the **Place in Folder** drop-down.
 - d. Click the '+' icon next to the *work* library and select *test_counter*.
 - e. Click the **Resolution** drop-down and select *ps*.

- f. For Verilog, click the Verilog tab and check **Enable hazard checking**.
- g. Click **OK**.

The Project tab now shows a Simulation Configuration named *counter* in the HDL folder (Figure 4-14).

Figure 4-14. A Simulation Configuration in the Project Tab

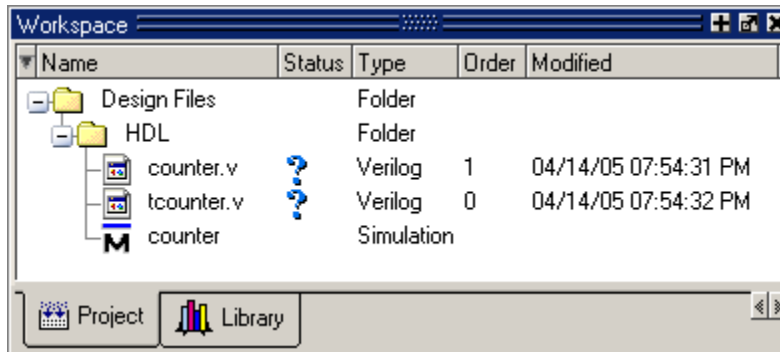


- 2. Load the Simulation Configuration.

- a. Double-click the *counter* Simulation Configuration in the Project tab.

In the Transcript pane of the Main window, the **vsim** (the ModelSim simulator) invocation shows the **-hazards** and **-t ps** switches (Figure 4-15). These are the command-line equivalents of the options you specified in the Simulate dialog.

Figure 4-15. Transcript Shows Options for Simulation Configurations

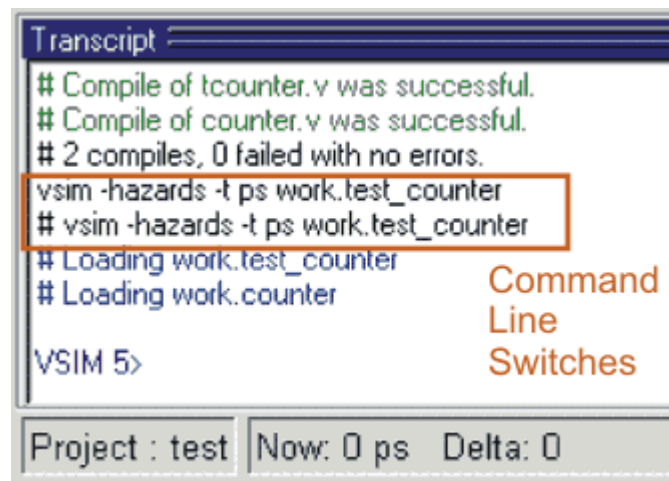

Lesson Wrap-Up

This concludes this lesson. Before continuing you need to end the current simulation and close the current project.

1. Select **Simulate > End Simulation**. Click Yes.
2. Select the Project tab in the Main window Workspace.
3. Right-click in this tab to open a popup menu and select **Close Project**.
4. Click **OK**.

If you do not close the project, it will open automatically the next time you start ModelSim.

Chapter 5

Working With Multiple Libraries

Introduction

In this lesson you will practice working with multiple libraries. You might have multiple libraries to organize your design, to access IP from a third-party source, or to share common parts between simulations.

You will start the lesson by creating a resource library that contains the *counter* design unit. Next, you will create a project and compile the testbench into it. Finally, you will link to the library containing the counter and then run the simulation.

Design Files for this Lesson

The sample design for this lesson is a simple 8-bit, binary up-counter with an associated testbench. The pathnames are as follows:

Verilog – `<install_dir>/examples/tutorials/verilog/libraries/counter.v` and `tcounter.v`

VHDL – `<install_dir>/examples/tutorials/vhdl/libraries/counter.vhd` and `tcounter.vhd`

This lesson uses the Verilog files `tcounter.v` and `counter.v` in the examples. If you have a VHDL license, use `tcounter.vhd` and `counter.vhd` instead.


Related Reading

User's Manual Chapter: [Design Libraries](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

 **Note** When you have completed the tutorial, remeber to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Creating the Resource Library

1. Create a directory for the resource library.

Create a new directory called *resource_library*. Copy *counter.v* from *<install_dir>/examples/tutorials/verilog/libraries* to the new directory.

2. Create a directory for the testbench.

Create a new directory called *testbench* that will hold the testbench and project files. Copy *tcounter.v* from *<install_dir>/examples/tutorials/verilog/libraries* to the new directory.

You are creating two directories in this lesson to mimic the situation where you receive a resource library from a third-party. As noted earlier, we will link to the resource library in the first directory later in the lesson.

3. Start ModelSim and change to the exercise directory.

If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.

- a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.

If the Welcome to ModelSim dialog appears, click **Close**.


- b. Select **File > Change Directory** and change to the *resource_library* directory you created in step 1.

4. Create the resource library.

- a. Select **File > New > Library**.

- b. Type **parts_lib** in the Library Name field ([Figure 5-1](#)).

Figure 5-1. Creating New Resource Library

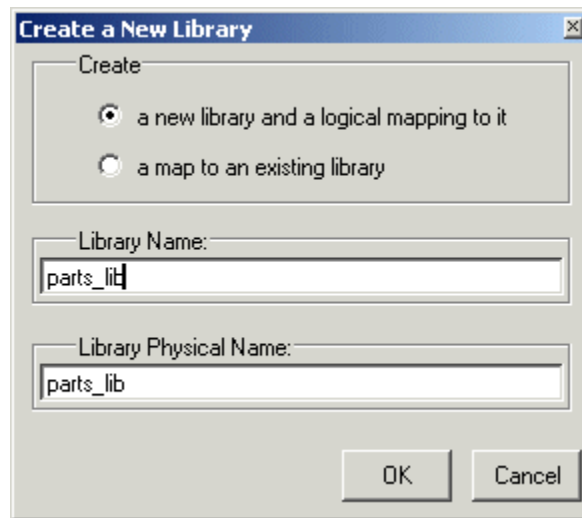


The Library Physical Name field is filled out automatically.

Once you click OK, ModelSim creates a directory for the library, lists it in the Library tab of the Workspace, and modifies the *modelsim.ini* file to record this new library for the future.

5. Compile the counter into the resource library.
 - a. Click the Compile icon on the Main window toolbar.
 - b. Select the *parts_lib* library from the Library list ([Figure 5-2](#)).



Figure 5-2. Compiling into the Resource Library

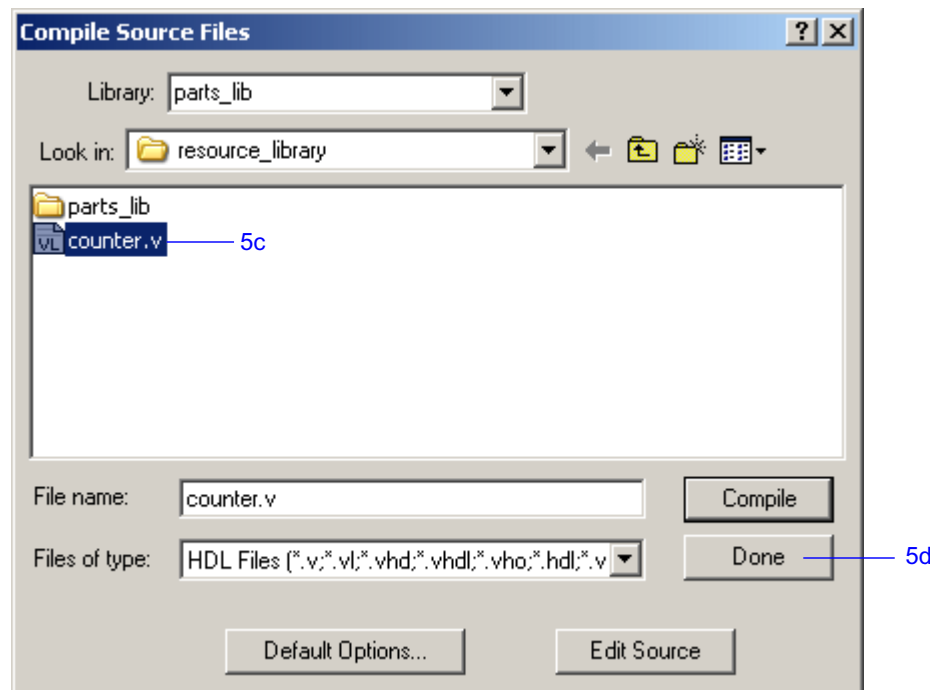

- c. Double-click *counter.v* to compile it.
- d. Click Done.

You now have a resource library containing a compiled version of the *counter* design unit.

6. Change to the *testbench* directory.
 - a. Select **File > Change Directory** and change to the *testbench* directory you created in step 2.

Creating the Project

Now you will create a project that contains *tcounter.v*, the counter's testbench.

1. Create the project.
 - a. Select **File > New > Project**.
 - b. Type **counter** in the Project Name field.
 - c. Do not change the Project Location field or the Default Library Name field. (The default library name is *work*.)
 - d. Make sure "Copy Library Mappings" is selected. The default *modelsim.ini* file will be used.

- e. Click **OK**.
2. Add the testbench to the project.
 - a. Click **Add Existing File** in the Add items to the Project dialog.
 - b. Click the **Browse** button and select *tcounter.v* in the “Select files to add to project” dialog.
 - c. Click **Open**.
 - d. Click **OK**.
 - e. Click **Close** to dismiss the Add items to the Project dialog.

The *tcounter.v* file is listed in the Project tab of the Main window.
3. Compile the testbench.
 - a. Right-click *tcounter.v* and select **Compile > Compile Selected**.

Linking to the Resource Library

To wrap up this part of the lesson, you will link to the *parts_lib* library you created earlier. But first, try simulating the testbench without the link and see what happens.


ModelSim responds differently for Verilog and VHDL in this situation.

Verilog

1. Simulate a Verilog design with a missing resource library.
 - a. In the Library tab, click the '+' icon next to the *work* library and double-click *test_counter*.

The Main window Transcript reports an error (Figure 5-3). When you see a message that contains text like "Error: (vsim-3033)", you can view more detail by using the **verror** command.

Figure 5-3. Verilog Simulation Error Reported in Main Window

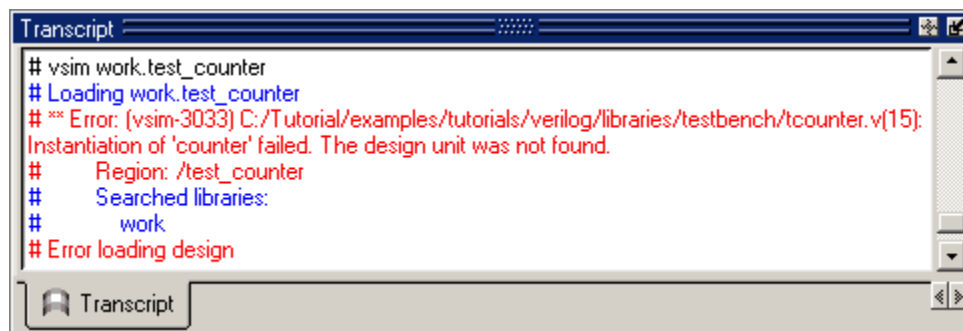

- b. Type **verror 3033** at the ModelSim> prompt.

The expanded error message tells you that a design unit could not be found for instantiation. It also tells you that the original error message should list which libraries ModelSim searched. In this case, the original message says ModelSim searched only *work*.

VHDL

1. Simulate a VHDL design with a missing resource library.
 - a. In the Library tab, click the '+' icon next to the *work* library and double-click *test_counter*.

The Main window Transcript reports a warning (Figure 5-4). When you see a message that contains text like "Warning: (vsim-3473)", you can view more detail by using the **verror** command.

Figure 5-4. VHDL Simulation Warning Reported in Main Window



```
Transcript
# -- Compiling architecture only of counter
cd C:/Tutorial/examples/testbench
# reading C:/ModelSim 6.1/modeltech/win32/./modelsim.ini
# Loading project counter_vhdl
# Compile of tcounter.vhd was successful.
ModelSim> vsim work.test_counter
# vsim work.test_counter
# Loading C:/ModelSim 6.1/modeltech/win32/./std.standard
# Loading work.test_counter[only]
# ** Warning: (vsim-3473) Component instance "dut : counter" is not bound.
# Time: 0 ns Iteration: 0 Region: /test_counter File: C:/Tutorial/examples/testbench/tcounter.vhd
VSIM 12>
```

- b. Type **verror 3473** at the ModelSim> prompt.

The expanded error message tells you that a component ('dut' in this case) has not been explicitly bound and no default binding can be found.


- c. Type **quit -sim** to quit the simulation.

The process for linking to a resource library differs between Verilog and VHDL. If you are using Verilog, follow the steps in [Linking in Verilog](#). If you are using VHDL, follow the steps in [Linking in VHDL](#) one page later.

Linking in Verilog

Linking in Verilog requires that you specify a "search library" when you invoke the simulator.

1. Specify a search library during simulation.


- a. Click the Simulate icon on the Main window toolbar. 
- b. Click the '+' icon next to the *work* library and select *test_counter*.
- c. Click the Libraries tab.
- d. Click the Add button next to the Search Libraries field and browse to *parts_lib* in the *resource_library* directory you created earlier in the lesson.
- e. Click OK.

The dialog should have *parts_lib* listed in the Search Libraries field ([Figure 5-5](#)).

- f. Click OK.

The design loads without errors.

Figure 5-5. Specifying a Search Library in the Simulate Dialog

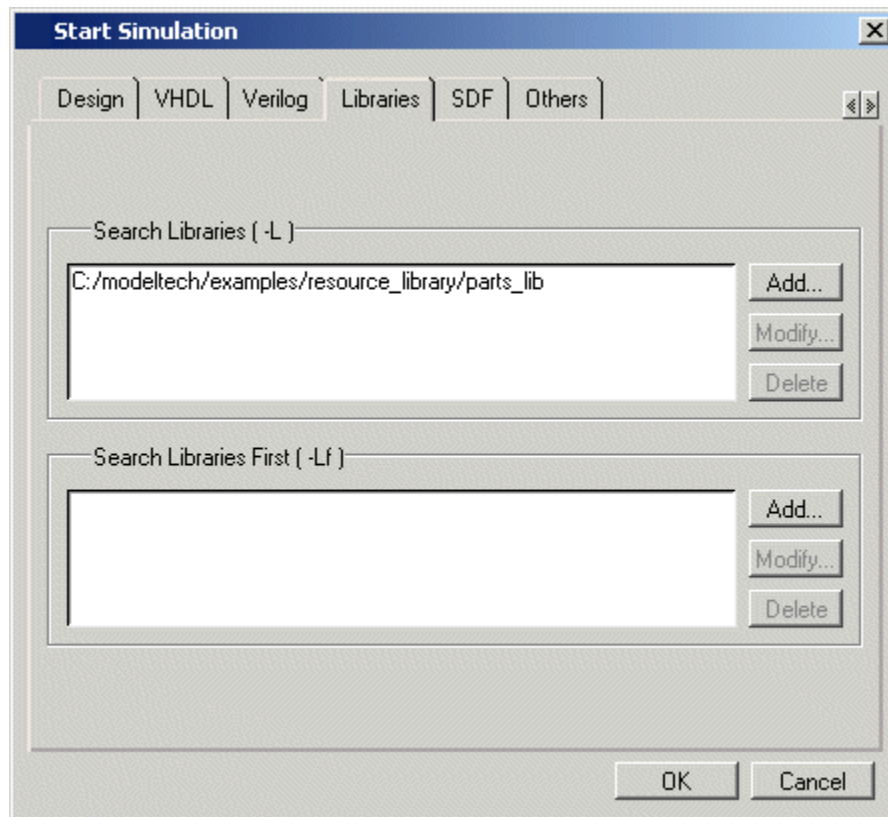


Linking in VHDL

To link to a resource library in VHDL, you have to create a logical mapping to the physical library and then add `LIBRARY` and `USE` statements to the source file.

1. Create a logical mapping to *parts_lib*.

- a. Select **File > New > Library**.
- b. In the Create a New Library dialog, select **a map to an existing library**.
- c. Type **parts_lib** in the Library Name field.
- d. Click Browse to open the Select Library dialog and browse to *parts_lib* in the *resource_library* directory you created earlier in the lesson.
- e. Click OK to select the library and close the Select Library dialog.
- f. The Create a New Library dialog should look similar to the one shown in [Figure 5-6](#). Click OK to close the dialog.

Figure 5-6. Mapping to the *parts_lib* Library

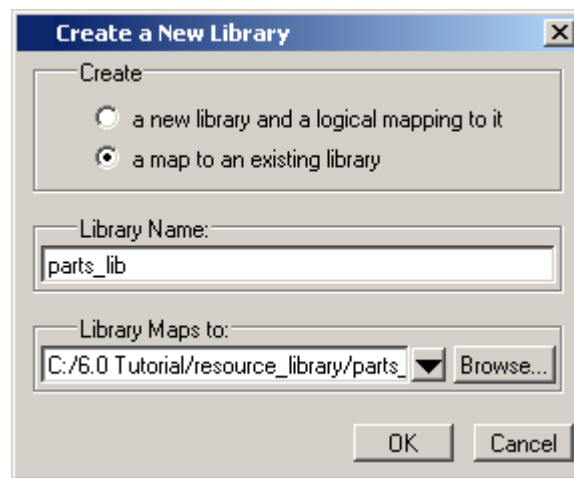


2. Add LIBRARY and USE statements to *tcounter.vhd*.
 - a. In the Library tab of the Main window, click the '+' icon next to the *work* library.
 - b. Right-click *test_counter* in the work library and select **Edit**.
 - c. This opens the file in the Source window.
 - d. Right-click in the Source window and uncheck Read Only.
 - e. Add these two lines to the top of the file:

```
LIBRARY parts_lib;  
USE parts_lib.ALL;
```

The testbench source code should now look similar to that shown in [Figure 5-7](#).

- f. Select **File > Save**.

Figure 5-7. Adding LIBRARY and USE Statements to the Testbench

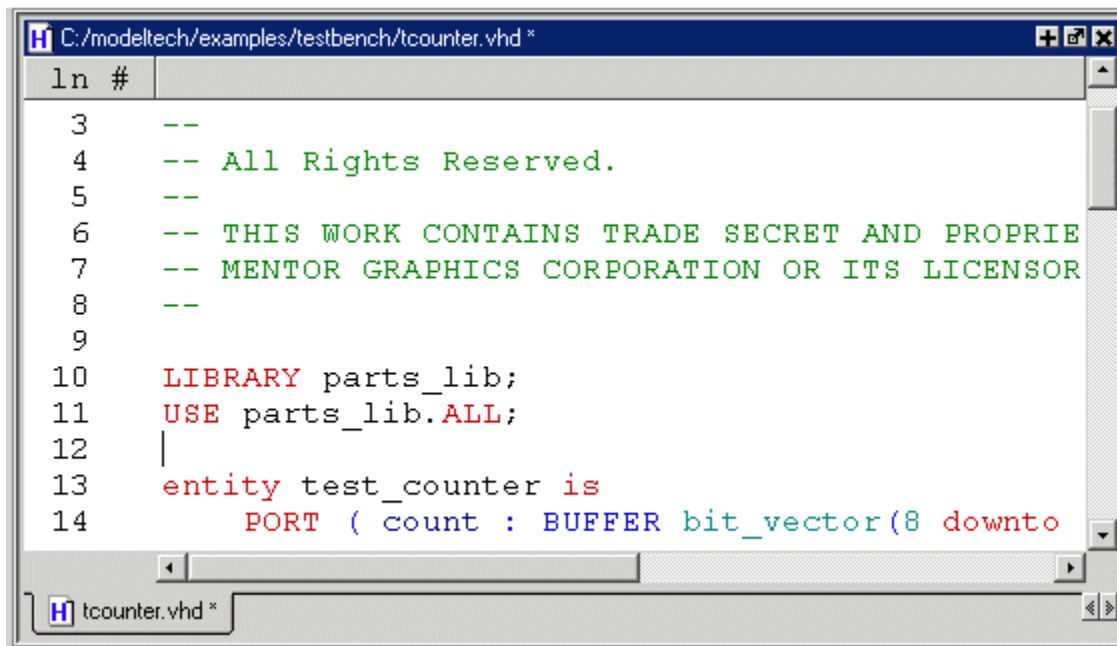

```
ln #
3  --
4  -- All Rights Reserved.
5  --
6  -- THIS WORK CONTAINS TRADE SECRET AND PROPRIETARY
7  -- MENTOR GRAPHICS CORPORATION OR ITS LICENSORS
8  --
9
10 LIBRARY parts_lib;
11 USE parts_lib.ALL;
12
13 entity test_counter is
14     PORT ( count : BUFFER bit_vector(8 downto
```

3. Recompile and simulate.
 - a. In the Project tab of the Workspace, right-click *tcounter.vhd* and select **Compile > Compile Selected**.
 - b. In the Library tab, double-click *test_counter* to load the design.
 - c. The design loads without errors.

Permanently Mapping VHDL Resource Libraries

If you reference particular VHDL resource libraries in every VHDL project or simulation, you may want to permanently map the libraries. Doing this requires that you edit the master *modelsim.ini* file in the installation directory. Though you won't actually practice it in this tutorial, here are the steps for editing the file:

1. Locate the *modelsim.ini* file in the ModelSim installation directory (*<install_dir>/modeltech/modelsim.ini*).
2. IMPORTANT - Make a backup copy of the file.
3. Change the file attributes of *modelsim.ini* so it is no longer "read-only."
4. Open the file and enter your library mappings in the [Library] section. For example:

```
parts_lib = C:/libraries/parts_lib
```
5. Save the file.

6. Change the file attributes so the file is "read-only" again.

Lesson Wrap-Up

This concludes this lesson. Before continuing we need to end the current simulation and close the project.

1. Select **Simulate > End Simulation**. Click **Yes**.
2. Select the Project tab of the Main window Workspace.
3. Select **File > Close**. Click **OK**.

Chapter 6

Simulating Designs With SystemC

Introduction

ModelSim treats SystemC as just another design language. With only a few exceptions in the current release, you can simulate and debug your SystemC designs the same way you do HDL designs.

Note



The functionality described in this lesson requires a systemc license feature in your ModelSim license file. Please contact your Mentor Graphics sales representative if you currently do not have such a feature.

Design Files for this Lesson

There are two sample designs for this lesson. The first is a very basic design, called "basic", containing only SystemC code. The second design is a ring buffer where the testbench and top-level chip are implemented in SystemC and the lower-level modules are written in HDL.

The pathnames to the files are as follows:

SystemC – *<install_dir>/examples/systemc/sc_basic*

SystemC/Verilog – *<install_dir>/examples/systemc/sc_vlog*

SystemC/VHDL – *<install_dir>/examples/systemc/sc_vhdl*

This lesson uses the SystemC/Verilog version of the ringbuf design in the examples. If you have a VHDL license, use the VHDL version instead. There is also a mixed version of the design, but the instructions here do not account for the slight differences in that version.

Related Reading

User's Manual Chapters: [SystemC Simulation](#), [Mixed-Language Simulation](#), and [C Debug](#).

Reference Manual command: [sccom](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

Note



When you have completed the tutorial, remeber to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Setting up the Environment

SystemC is a licensed feature. You need the *systemc* license feature in your ModelSim license file to simulate SystemC designs. Please contact your Mentor Graphics sales representatives if you currently do not have such a feature.

The table below shows the supported operating systems for SystemC and the corresponding required versions of a C compiler.

Table 6-1. Supported Operating Systems for SystemC

Platfor	Supported compiler versions
HP-UX 11.0 or later	aCC 3.45 with associated patches
RedHat Linux 7.2 and 7.3 RedHat Linux Enterprise version 2.1	gcc 3.2.3, gcc 4.0.2
AMD64 / SUSE Linux Enterprise Server 9.0, 9.1 or Red Hat Enterprise Linux 3, 4	gcc 4.0.2 VCO is linux (32-bit binary) VCO is linux_x86_64 (64-bit binary)
Solaris 8, 9, 10	gcc 3.3
Windows 2000 and XP	Minimalist GNU for Windows (MinGW) gcc 3.3.1

See *SystemC simulation* in the *ModelSim User's Manual* for further details.

Preparing an OSCI SystemC design

For an OpenSystemC Initiative (OSCI) compliant SystemC design to run on ModelSim, you must first:

- Replace **sc_main()** with an **SC_MODULE**, potentially adding a process to contain any testbench code
- Replace **sc_start()** by using the **run** command in the GUI
- Remove calls to **sc_initialize()**
- Export the top level SystemC design unit(s) using the **SC_MODULE_EXPORT** macro

In order to maintain portability between OSCI and ModelSim simulations, we recommend that you preserve the original code by using **#ifdef** to add the ModelSim-specific information. When the design is analyzed, **sccom** recognizes the **MTI_SYSTEMC** preprocessing directive and handles the code appropriately.

For more information on these modifications, Refer to the section [Modifying SystemC Source Code](#) in the User's Manual.

1. Create a new directory and copy the tutorial files into it.

Start by creating a new directory for this exercise (in case other users will be working with these lessons). Create the directory, then copy all files from `<install_dir>/examples/systemc/sc_basic` into the new directory.

2. Start ModelSim and change to the exercise directory.

If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.

- a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.

If the Welcome to ModelSim dialog appears, click **Close**.

- b. Select **File > Change Directory** and change to the directory you created in step 1.


3. Use a text editor to view and edit the *basic_orig.cpp* file. To use ModelSim's editor, from the Main Menu select **File > Open**. Change the files of type to C/C++ files then double-click *basic_orig.cpp*.

- a. Using the **#ifdef MTI_SYSTEMC** preprocessor directive, add the **SC_MODULE_EXPORT(top);** to the design as shown in [Figure 6-1](#). (The left side of [Figure 6-1](#) is the original code; the right side is the modified code.) Close the preprocessing directive with **#else**.

The original code in the *.cpp* file follows directly after **#else**. End that section of the file with **#endif**.

- b. Save the file as *basic.cpp*.

Figure 6-1. SystemC Code Before and After Modifications

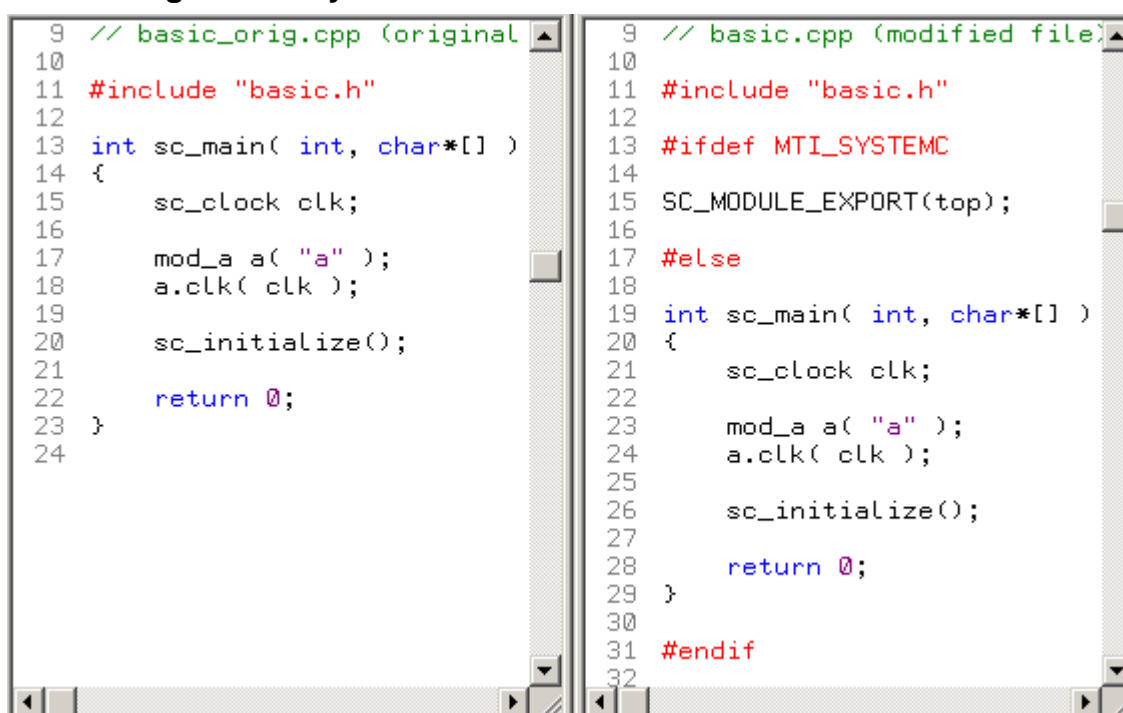

A correctly modified copy of the *basic.cpp* is also available in the *sc_basic/gold* directory.

4. Edit the *basic_orig.h* header file as shown in [Figure 6-2](#).
 - a. Add a ModelSim specific SC_MODULE (top) as shown in lines 52 through 65 of [Figure 6-2](#).

The declarations that were in *sc_main* are placed here in the header file, in SC_MODULE (top). This creates a top level module above *mod_a*, which allows the tool's automatic name binding feature to properly associate the primitive channels with their names.

Figure 6-2. Editing the SystemC Header File.

```

9  // basic.h (modified header file)
10
11  #ifndef INCLUDED_BASIC
12  #define INCLUDED_BASIC
13
14  #include "systemc.h"
15
16  SC_MODULE( mod_a )
17  {
18      sc_in_clk clk;
19
20      void main_action_method()
21      {
22          cout << simcontext()->delta_count()
23              << " main_action_method called" << endl;
24      }
25
26      void main_action_thread()
27      {
28          while( true ) {
29              cout << simcontext()->delta_count()
30                  << " main_action_thread called" << endl;
31              wait();
32          }
33      }
34
35      void main_action_ctypead()
36      {
37          while( true ) {
38              cout << simcontext()->delta_count()
39                  << " main_action_ctypead called" << endl;
40              wait();
41          }
42      }
43
44      SC_CTOR( mod_a )
45      {
46          SC_METHOD( main_action_method );
47          SC_THREAD( main_action_thread );
48          SC_CTYPEAD( main_action_ctypead, clk.pos() );
49      }
50  };
51
52  #ifdef MTI_SYSTEMC
53  SC_MODULE(top)
54  {
55      sc_clock clk;
56      mod_a a;
57
58      SC_CTOR(top)
59      : clk("clk", 200, 0.5, 0.0, false),
60        a("a")
61      {
62          a.clk( clk );
63      }
64  };
65  #endif

```

- b. Save the file as *basic.h*.

A correctly modified copy of the *basic.h* is also available in the *sc_basic/gold* directory.

You have now made all the edits that are required for preparing the design for compilation.

Compiling a SystemC-only Design

With the edits complete, you are ready to compile the design. Designs that contain only SystemC code are compiled with [sccom](#).

1. Set the working library.
 - a. Type **vlib work** in the ModelSim Transcript window to create the working library.
2. Compile and link all SystemC files.
 - a. Type **sccom -g basic.cpp** at the ModelSim> prompt.
The -g argument compiles the design for debug.
 - b. Type **sccom -link** at the ModelSim> prompt to perform the final link on the SystemC objects.

You have successfully compiled and linked the design. The successful compilation verifies that all the necessary file modifications have been entered correctly.

In the next exercise you will compile and load a design that includes both SystemC and HDL code.

Mixed SystemC and HDL Example

In this next example, you have a SystemC testbench that instantiates an HDL module. In order for the SystemC testbench to interface properly with the HDL module, you must create a stub module, a foreign module declaration. You will use the [scgenmod](#) utility to create the foreign module declaration. Finally, you will link the created C object files using **scom -link**.

1. Create a new exercise directory and copy the tutorial files into it.

Start by creating a new directory for this exercise (in case other users will be working with these lessons). Create the directory, then copy all files from `<install_dir>/examples/systemc/sc_vlog` into the new directory.

If you have a VHDL license, copy the files in `<install_dir>/examples/systemc/sc_vhdl` instead.

2. Start ModelSim and change to the exercise directory

If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.

- a. Type **vsim** at a command shell prompt.

If the Welcome to ModelSim dialog appears, click **Close**.

- b. Select **File > Change Directory** and change to the directory you created in step 1.

3. Set the working library.

- a. Type **vlib work** in the ModelSim Transcript window to create the working library.

4. Compile the design.

- a. **Verilog:**

Type **vlog *.v** in the ModelSim Transcript window to compile all Verilog source files.

VHDL:

Type **vcom -93 *.vhd** in the ModelSim Transcript window to compile all VHDL source files.

5. Create the foreign module declaration (SystemC stub) for the Verilog module *ringbuf*.

- a. **Verilog:**

Type **scgenmod -bool ringbuf > ringbuf.h** at the ModelSim> prompt.

The **-bool** argument is used to generate boolean scalar port types inside the foreign module declaration. See [scgenmod](#) for more information.

VHDL:

Type **scgenmod ringbuf > ringbuf.h** at the ModelSim> prompt.

The output is redirected to the file *ringbuf.h* ([Figure 6-3](#)).

Figure 6-3. The *ringbuf.h* File.

```
9  #ifndef INCLUDED_RINGBUF
10 #define INCLUDED_RINGBUF
11
12 #include <systemc.h>
13
14 class ringbuf : public sc_foreign_module
15 {
16 public:
17     // Module ports
18     sc_in<bool>          clock;
19     sc_in<bool>          reset;
20     sc_in<bool>          txda;
21     sc_out<bool>         rxda;
22     sc_out<bool>         outstrobe;
23     sc_out<bool>         txc;
24
25     ringbuf(sc_module_name nm)
26         : sc_foreign_module(nm, "ringbuf"),
27         clock("clock"),
28         reset("reset"),
29         txda("txda"),
30         rxda("rxda"),
31         outstrobe("outstrobe"),
32         txc("txc")
33     {
34     }
35
36     ~ringbuf()
37     {
38     }
39 };
40
41 #endif
42
```

This file is included in *test_ringbuf.h* which is included in file *test_ringbuf.cpp* (Figure 6-4).

Figure 6-4. The *test_ringbuf.cpp* File

```
8
9  // test_ringbuf.cpp
10
11 #include "test_ringbuf.h"
12 #include <iostream>
13
14
15 SC_MODULE_EXPORT(test_ringbuf);
16
```

6. Compile and link all SystemC files, including the generated *ringbuf.h*.
 - a. Type **sccom -g test_ringbuf.cpp** at the ModelSim> prompt.


The *test_ringbuf.cpp* file contains an include statement for *test_ringbuf.h* and a required `SC_MODULE_EXPORT(top)` statement, which informs ModelSim that the top-level module is SystemC.

- b. Type **sccom -link** at the ModelSim> prompt to perform the final link on the SystemC objects.
7. Load the design.
 - a. Click on the Library tab in the Workspace pane of the Main window.
 - b. Click the '+' icon next to the *work* library.
 - c. Double click the *test_ringbuf* design unit.

The equivalent command-line entry is **vsim test_ringbuf**, entered at the ModelSim> prompt. If you did not [Disable Optimizations](#), you will a message in the Transcript telling you that the design is being optimized. If this happens, end the simulation with the **Simulate > End Simulation** menu selections; then enter `vsim - novopt test_ring.buf` at the command line.,

8. If necessary, you may close the Locals, Profile, and Watch panes of the Main window. Make sure the Objects and Active Processes panes are open, as shown in [Figure 6-5](#). To open or close these windows, use the **View** menu.

Figure 6-5. The test_ringbuf Design

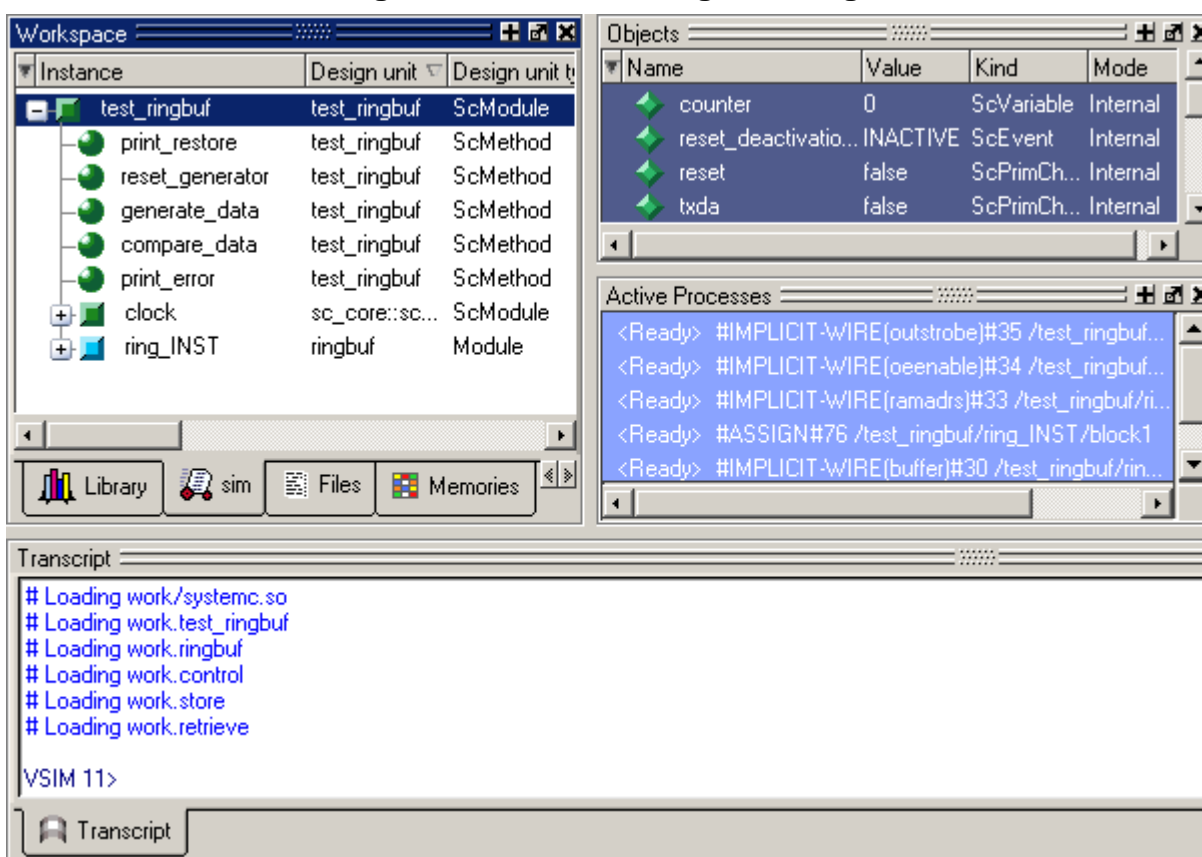


Viewing SystemC Objects in the GUI

SystemC objects are denoted in the ModelSim GUI with a green 'S' on the Library tab, a green 'C' on the Files tab, and a green square, circle, or diamond icon elsewhere.

1. View Workspace and objects.
 - a. Click on the Library tab in the Workspace pane of the Main window.
- SystemC objects have a green 'S' next to their names ([Figure 6-6](#)).


Figure 6-6. SystemC Objects in the work Library

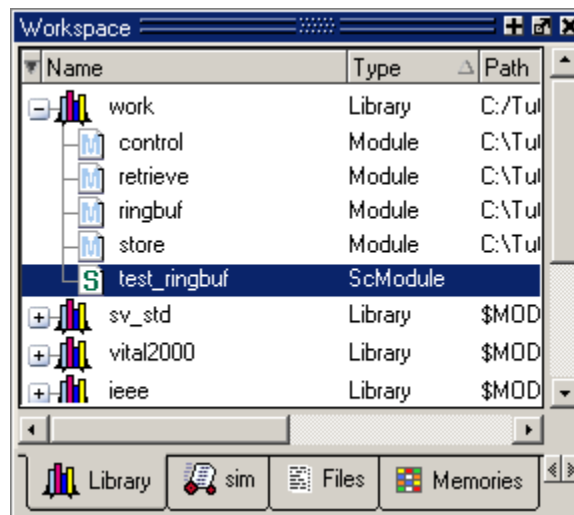

2. Observe window linkages.
 - a. Click on the sim tab in the Workspace pane of the Main window.
 - b. Select the *clock* instance in the sim tab ([Figure 6-7](#)).

The Objects window updates to show the associated SystemC or HDL objects.

Figure 6-7. SystemC Objects in the sim Tab of the Workspace

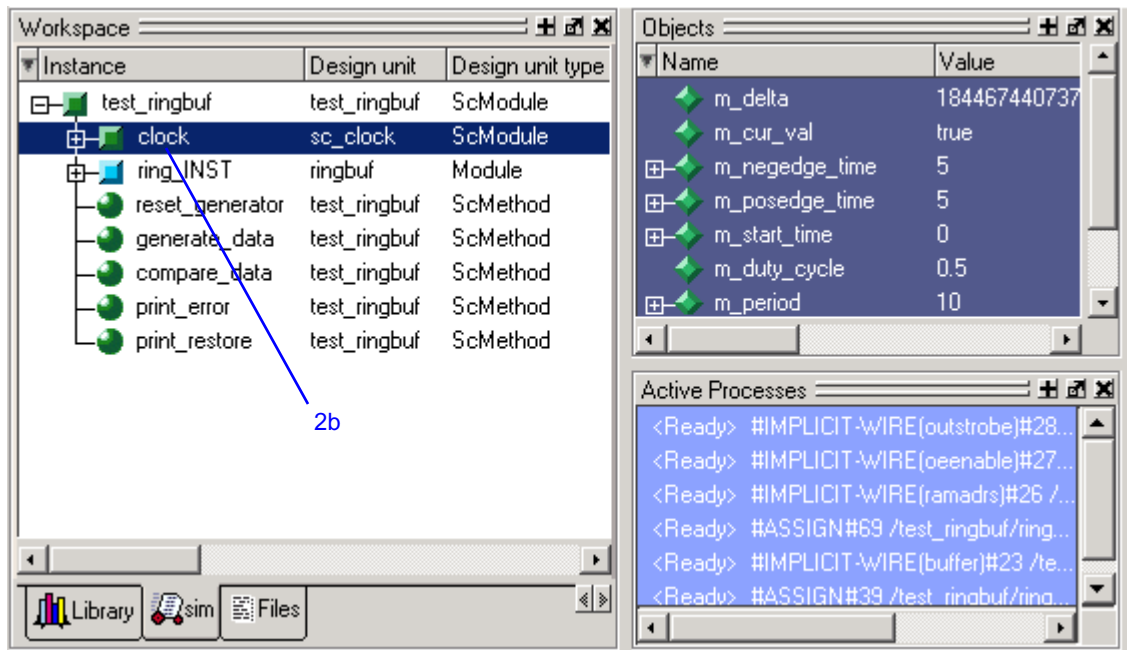

3. Add objects to the Wave window.
 - a. Right-click *test_ringbuf* in the sim tab of the Workspace and select **Add > Add to Wave**.

Setting Breakpoints and Stepping in the Source Window

As with HDL files, you can set breakpoints and step through SystemC files in the Source window. In the case of SystemC, ModelSim uses C Debug, an interface to the open-source **gdb** debugger. Refer to the chapter [C Debug](#) in the User's Manual for complete details.


1. Set a breakpoint.
 - a. Double-click *test_ringbuf* in the sim pane of the Workspace to open the source file.
 - b. In the Source window, scroll to near line 150 of *test_ringbuf.h*.
 - c. Click on the red line number next to the line (shown in [Figure 6-8](#)) containing:

Verilog: bool var_dataerror_newval = actual.read ...

VHDL: sc_logic var_dataerror_newval = acutal.read ...

ModelSim recognizes that the file contains SystemC code and automatically launches C Debug. Once the debugger is running, ModelSim places a solid red sphere next to the line number ([Figure 6-8](#)).

Figure 6-8. Active Breakpoint in a SystemC File

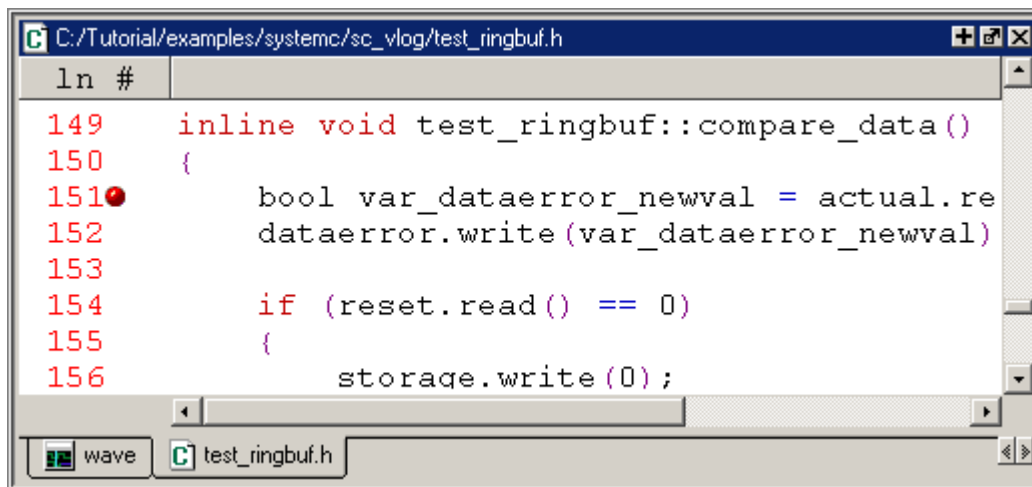


2. Run and step through the code.
 - a. Type **run 500** at the VSIM> prompt.

When the simulation hits the breakpoint, it stops running, highlights the line with a blue arrow in the Source window (Figure 6-9), and issues a message like this in the Transcript:

```
# C breakpoint c.l
# test_ringbuf::compare_data() (this=0x842f658) at
test_ringbuf.h:<line_number>
```

Figure 6-9. Simulation Stopped at Breakpoint

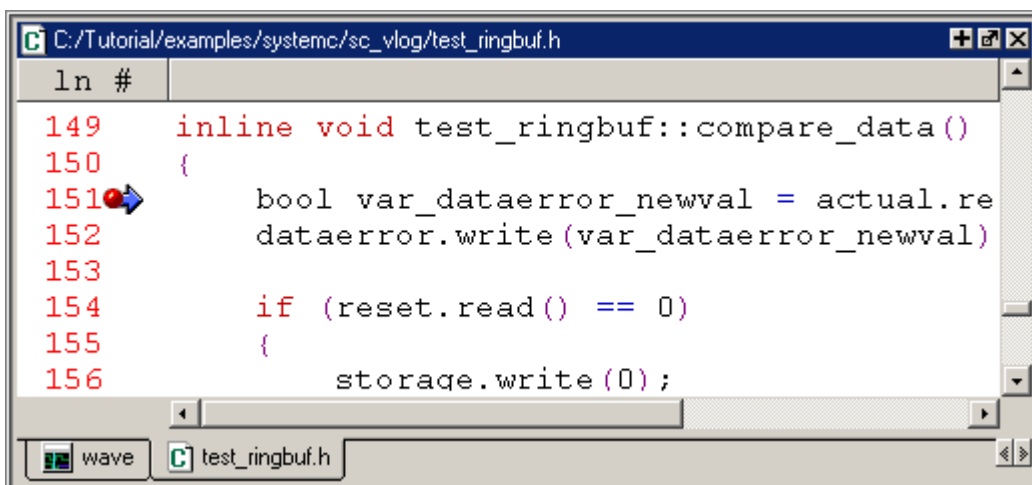


- b. Click the Step icon on the toolbar.



This steps the simulation to the next statement. Because the next statement is a function call, ModelSim steps into the function, which is in a separate file — *sc_signal.h* (Figure 6-10).

Figure 6-10. Stepping into a Separate File

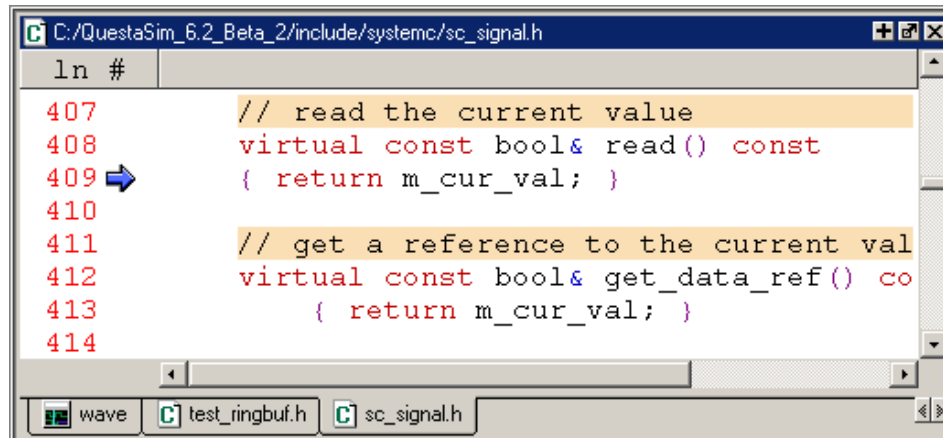

- c. Click the Continue Run icon in the toolbar.



The breakpoint in *test_ringbuf.h* is hit again.


Examining SystemC Objects and Variables

To examine the value of a SystemC object or variable, you can use the examine command or view the value in the Objects window.

1. View the value and type of an *sc_signal*.
 - a. Type **show** at the **CDBG >** prompt to display a list of all design objects, including their types, in the Transcript.

In this list, you'll see that the type for *dataerror* is "boolean" (*sc_logic* for VHDL) and *counter* is "int" (Figure 6-11).

Figure 6-11. Output of show Command

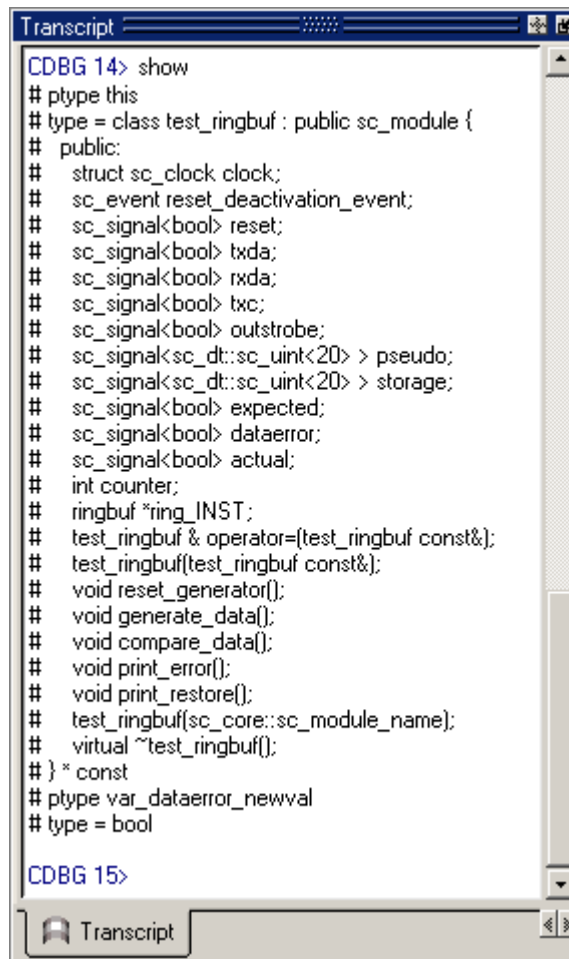

```

Transcript
CDBG 14> show
# ptype this
# type = class test_ringbuf : public sc_module {
#   public:
#     struct sc_clock clock;
#     sc_event reset_deactivation_event;
#     sc_signal<bool> reset;
#     sc_signal<bool> txda;
#     sc_signal<bool> rxda;
#     sc_signal<bool> txc;
#     sc_signal<bool> outstrobe;
#     sc_signal<sc_dt::sc_uint<20> > pseudo;
#     sc_signal<sc_dt::sc_uint<20> > storage;
#     sc_signal<bool> expected;
#     sc_signal<bool> dataerror;
#     sc_signal<bool> actual;
#     int counter;
#     ringbuf *ring_INST;
#     test_ringbuf & operator=(test_ringbuf const&);
#     test_ringbuf(test_ringbuf const&);
#     void reset_generator();
#     void generate_data();
#     void compare_data();
#     void print_error();
#     void print_restore();
#     test_ringbuf(sc_core::sc_module_name);
#     virtual ~test_ringbuf();
# } * const
# ptype var_dataerror_newval
# type = bool

CDBG 15>
  
```

- b. Type **examine dataerror** at the CDBG > prompt.
The value returned is "true".
2. View the value of a SystemC variable.
 - a. Type **examine counter** at the CDBG > prompt to view the value of this variable.
The value returned is "-1".


Removing a Breakpoint

1. Right-click the red sphere in the Source window and select **Remove Breakpoint**.
2. Click the Continue Run button again.

The simulation runs for 500 ns and waves are drawn in the Wave window (Figure 6-12).

If you are using the VHDL version, you might see warnings in the Main window transcript. These warnings are related to VHDL value conversion routines and can be ignored.

Figure 6-12. SystemC Primitive Channels in the Wave Window

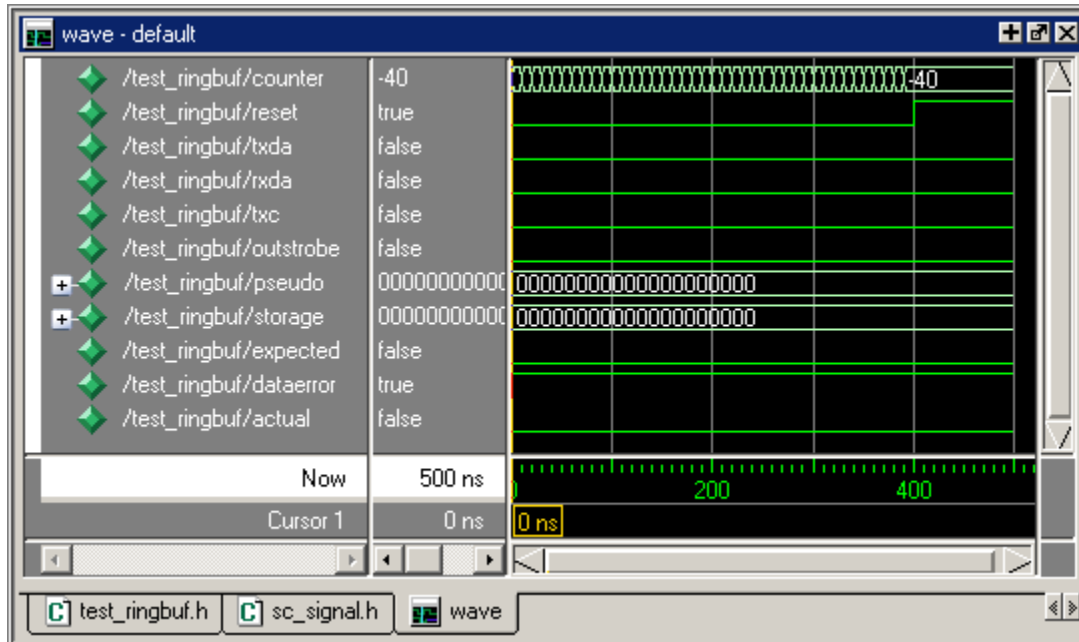

Lesson Wrap-up

This concludes the lesson. Before continuing we need to quit the C debugger and end the current simulation.

1. Select **Tools > C Debug > Quit C Debug**.
2. Select **Simulate > End Simulation**. Click **Yes** when prompted to confirm that you wish to quit simulating.

Chapter 7


Analyzing Waveforms

Introduction

The Wave window allows you to view the results of your simulation as HDL waveforms and their values.

The Wave window is divided into a number of window panes (Figure 7-1). All window panes in the Wave window can be resized by clicking and dragging the bar between any two panes.

Figure 7-1. Panes of the Wave Window

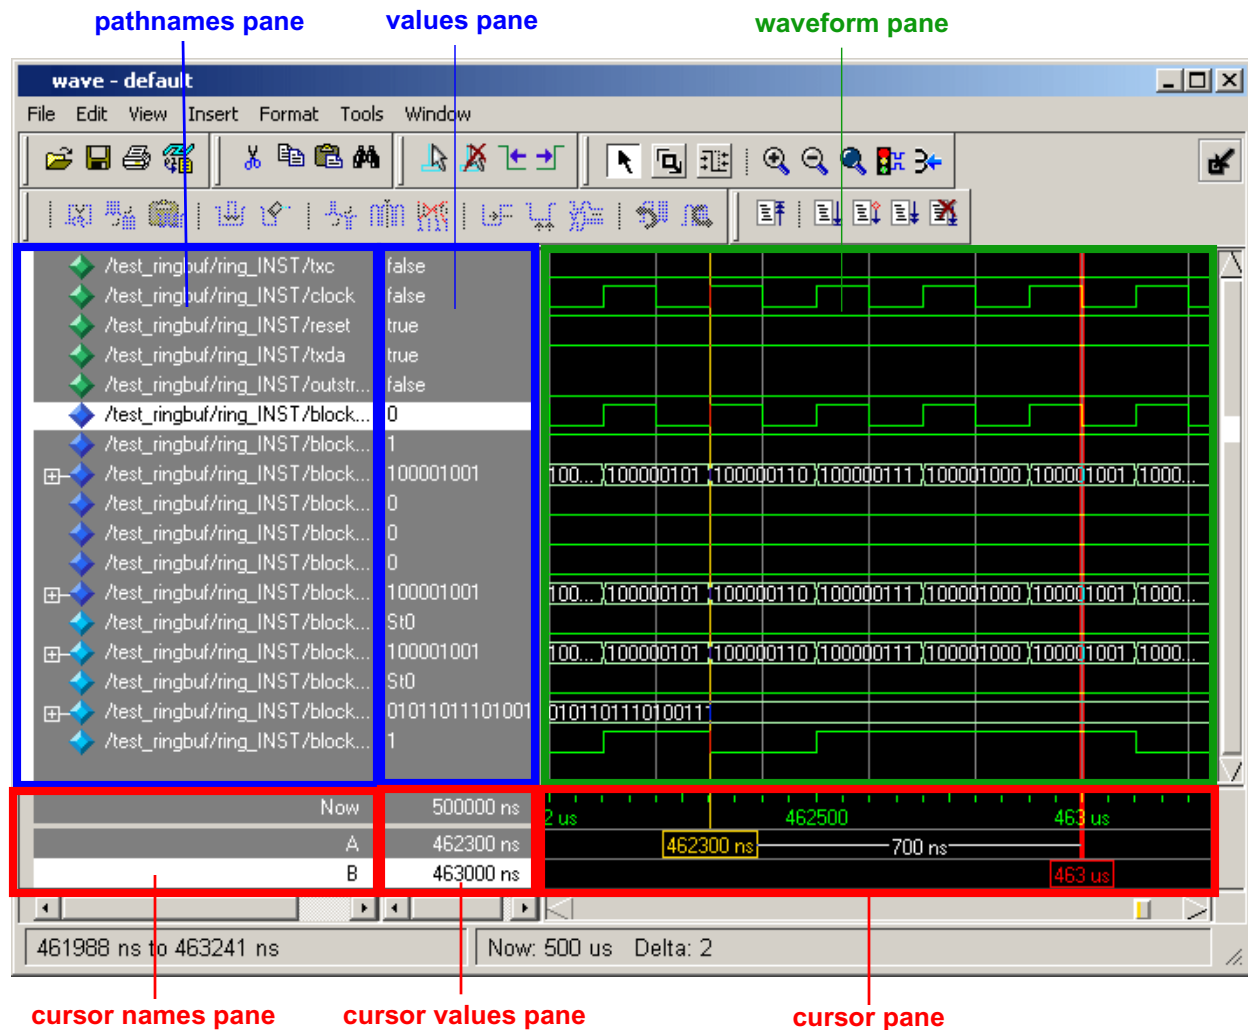

Related Reading

User's Manual sections: [Wave Window](#) and [WLF Files \(Datasets\) and Virtuals](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

Note



When you have completed the tutorial, remeber to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Loading a Design

For the examples in this lesson, we have used the design simulated in [Basic Simulation](#).

1. If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.
 - a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.
If the Welcome to ModelSim dialog appears, click **Close**.
2. Load the design.
 - a. Select **File > Change Directory** and open the directory you created in Lesson 2.
The *work* library should already exist.
 - b. Click the '+' icon next to the *work* library and double-click *test_counter*.
ModelSim loads the design and adds *sim* and *Files* tabs to the Workspace.

Adding Objects to the Wave Window

ModelSim offers several methods for adding objects to the Wave window. In this exercise, you will try different methods.

1. Add objects from the Objects pane.

- a. Select an item in the Objects pane of the Main window, right-click, and then select **Add to Wave > Signals in Region**.

ModelSim adds several signals to the Wave window.


2. Undock the Wave window.

By default ModelSim opens Wave windows as a tab in the MDI frame of the Main window. You can change the default via the Preferences dialog (Tools > Edit Preferences). Refer to the section [Simulator GUI Preferences](#) in the User's Manual for more information.

- a. Click the undock button on the Wave pane ([Figure 7-2](#)).

The Wave pane becomes a standalone, un-docked window. You may need to resize the window.

Figure 7-2. Undocking the Wave Window

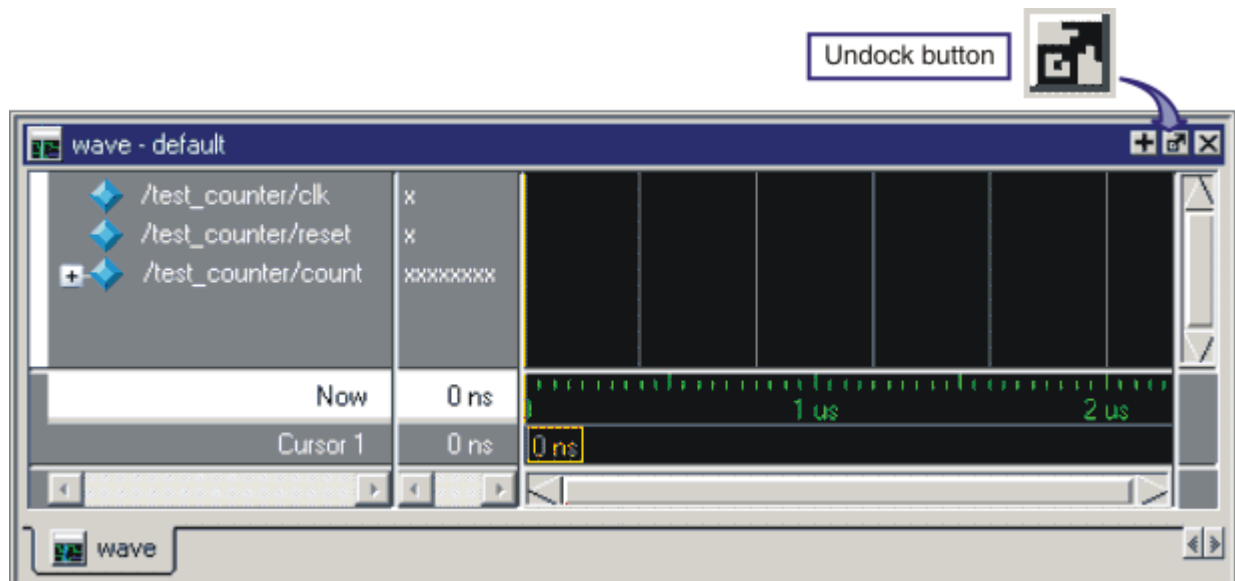

3. Add objects using drag-and-drop.

You can drag an object to the Wave window from many other windows and panes (e.g., Workspace, Objects, and Locals).

- a. In the Wave window, select **Edit > Select All** and then **Edit > Delete**.
- b. Drag an instance from the *sim* tab of the Main window to the Wave window.

ModelSim adds the objects for that instance to the Wave window.

- c. Drag a signal from the Objects pane to the Wave window.
- d. In the Wave window, select **Edit > Select All** and then **Edit > Delete**.

4. Add objects using a command.

- a. Type **add wave *** at the VSIM> prompt.
ModelSim adds all objects from the current region.
- b. Run the simulation for awhile so you can see waveforms.

Zooming the Waveform Display

Zooming lets you change the display range in the waveform pane. There are numerous methods for zooming the display.

1. Zoom the display using various techniques.


- a. Click the Zoom Mode icon on the Wave window toolbar.



- b. In the waveform pane, click and drag down and to the right.

You should see blue vertical lines and numbers defining an area to zoom in (Figure 7-3).

Figure 7-3. Zooming in with the Mouse Pointer

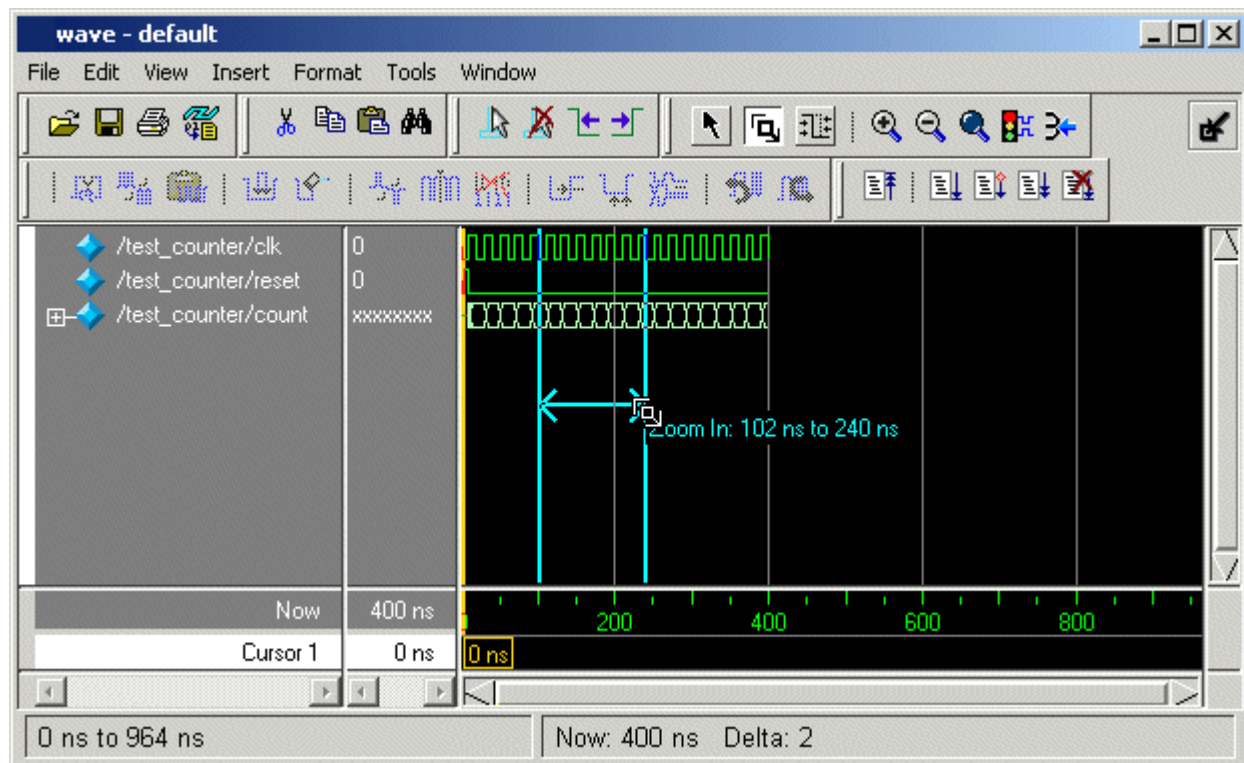

- c. Select **View > Zoom > Zoom Last**.

The waveform pane returns to the previous display range.

- d. Click the Zoom In 2x icon a few times.



- e. In the waveform pane, click and drag up and to the right.
You should see a blue line and numbers defining an area to zoom out.
- f. Select **View > Zoom > Zoom Full**.

Using Cursors in the Wave Window

Cursors mark simulation time in the Wave window. When ModelSim first draws the Wave window, it places one cursor at time zero. Clicking anywhere in the waveform pane brings that cursor to the mouse location.

You can also add additional cursors; name, lock, and delete cursors; use cursors to measure time intervals; and use cursors to find transitions.


Working with a Single Cursor

1. Position the cursor by clicking and dragging.
 - a. Click the Select Mode icon on the Wave window toolbar.
 - b. Click anywhere in the waveform pane.



A cursor is inserted at the time where you clicked ([Figure 7-4](#)).

Figure 7-4. Working with a Single Cursor in the Wave Window

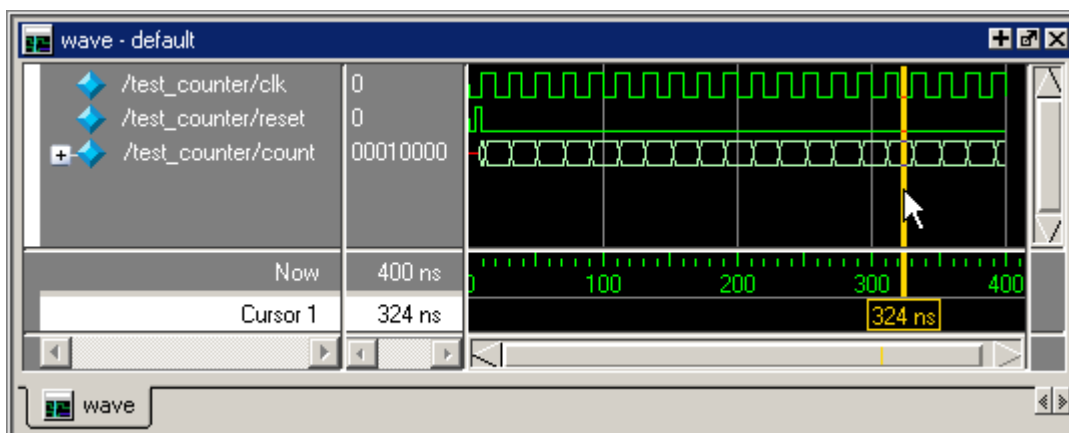

- c. Drag the cursor and observe the value pane.
The signal values change as you move the cursor. This is perhaps the easiest way to examine the value of a signal at a particular time.
- d. In the waveform pane, drag the cursor to the right of a transition with the mouse positioned over a waveform.

The cursor "snaps" to the transition. Cursors "snap" to a waveform edge if you click or drag a cursor to within ten pixels of a waveform edge. You can set the snap distance in the Window Preferences dialog (select **Tools > Window Preferences**).

- e. In the cursor pane, drag the cursor to the right of a transition (Figure 7-4).


The cursor doesn't snap to a transition if you drag in the cursor pane.

2. Rename the cursor.

- a. Right-click "Cursor 1" in the cursor name pane, and select and delete the text.
- b. Type **A** and press Enter.

The cursor name changes to "A" (Figure 7-5).

Figure 7-5. Renaming a Cursor

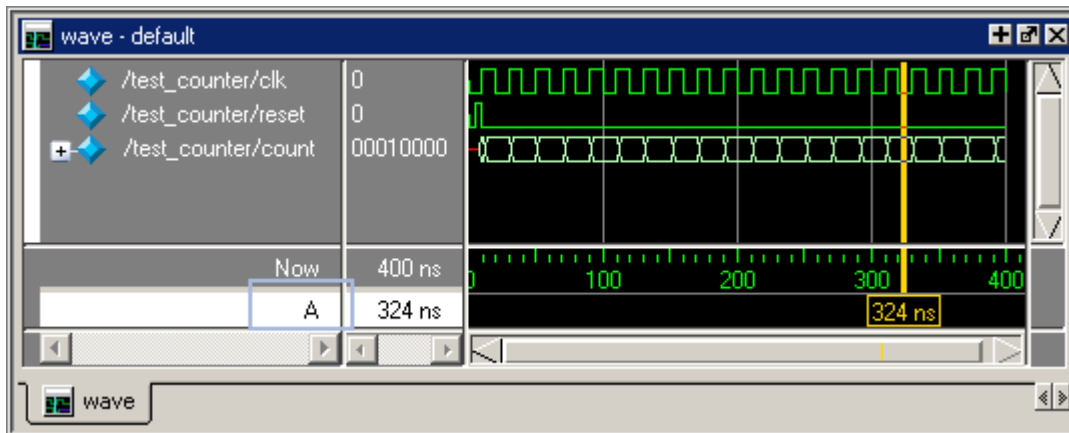

3. Jump the cursor to the next or previous transition.

- a. Click signal *count* in the pathname pane.

- b. Click the Find Next Transition icon on the Wave window toolbar.



The cursor jumps to the next transition on the currently selected signal.

- c. Click the Find Previous Transition icon on the Wave window toolbar.



The cursor jumps to the previous transition on the currently selected signal.

Working with Multiple Cursors


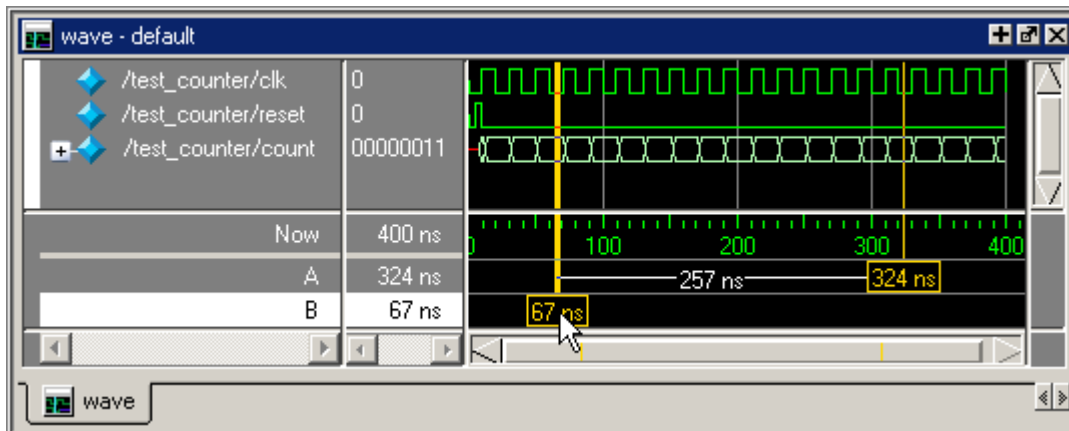
1. Add a second cursor.
 - a. Click the Add Cursor icon on the Wave window toolbar. 
 - b. Right-click the name of the new cursor and delete the text.
 - c. Type **B** and press Enter.
 - d. Drag cursor *B* and watch the interval measurement change dynamically (Figure 7-6).


Figure 7-6. Interval Measurement Between Two Cursors



2. Lock cursor *B*.
 - a. Right-click cursor *B* in the cursor pane and select **Lock B**.

The cursor color changes to red and you can no longer drag the cursor (Figure 7-7).

Figure 7-7. A Locked Cursor in the Wave Window

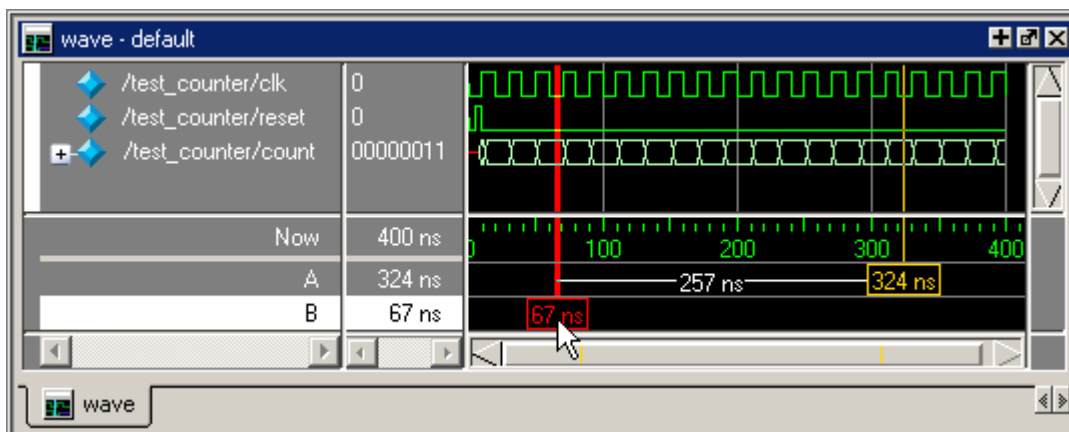

3. Delete cursor *B*.
 - a. Right-click cursor *B* and select **Delete B**.

Saving the Window Format

If you close the Wave window, any configurations you made to the window (e.g., signals added, cursors set, etc.) are discarded. However, you can use the Save Format command to capture the current Wave window display and signal preferences to a DO file. You open the DO file later to recreate the Wave window as it appeared when the file was created.

Format files are design-specific; use them only with the design you were simulating when they were created.

1. Save a format file.
 - a. In the Wave window, select **File > Save**.
 - b. In the Pathname field of the Save Format dialog, leave the file name set to *wave.do* and click **OK**.
 - c. Close the Wave window.
2. Load a format file.
 - a. In the Main window, select **View > Wave**.
 - b. Undock the window.

All signals and cursor(s) that you had set are gone.
 - c. In the Wave window, select **File > Load**.
 - d. In the Open Format dialog, select *wave.do* and click **Open**.

ModelSim restores the window to its previous state.
 - e. Close the Wave window when you are finished by selecting **File > Close Window**.

Lesson Wrap-Up

This concludes this lesson. Before continuing we need to end the current simulation.

1. Select **Simulate > End Simulation**. Click Yes.

Chapter 8

Creating Stimulus With Waveform Editor

Introduction

The Waveform Editor creates stimulus for your design via interactive manipulation of waveforms. You can then run the simulation with these edited waveforms or export them to a stimulus file for later use.

In this lesson you will do the following:

- Load the *counter* design unit without a testbench
- Create waves via a wizard
- Edit waves interactively in the Wave window
- Export the waves to an HDL testbench and extended VCD file
- Run the simulation
- Re-simulate using the exported testbench and VCD file

Related Reading

User's Manual Sections: [Generating Stimulus with Waveform Editor](#) and [Wave Window](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

Note



When you have completed the tutorial, remember to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Loading a Design Unit

For the examples in this lesson, we will use part of the design simulated in [Basic Simulation](#).

Note



You can also use the Waveform Editor prior to loading a design. Refer to the section [Using Waveform Editor Prior to Loading a Design](#) in the User Manual for more information.

1. If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.
 - a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.

If the Welcome to ModelSim dialog appears, click **Close**.

2. Open a Wave window.
 - a. Select **View > Wave** from the Main window menus.
3. Load the *counter* design unit.
 - a. Select **File > Change Directory** and open the directory you created in Lesson 2.

The *work* library should already exist.

- b. Click the '+' icon next to the *work* library and double-click *counter*.


ModelSim loads the *counter* design unit and adds *sim*, *Files*, and *Memories* tabs to the Workspace.

Creating Waves with a Wizard

Waveform Editor includes a Create Pattern wizard that walks you through the process of creating editable waveforms.

1. Use the Create Pattern wizard to create a clock pattern.
 - a. In the Objects pane, right click signal *clk* and select **Create Wave** ([Figure 8-1](#)).


Figure 8-1. Initiating the Create Pattern Wizard from the Objects Pane

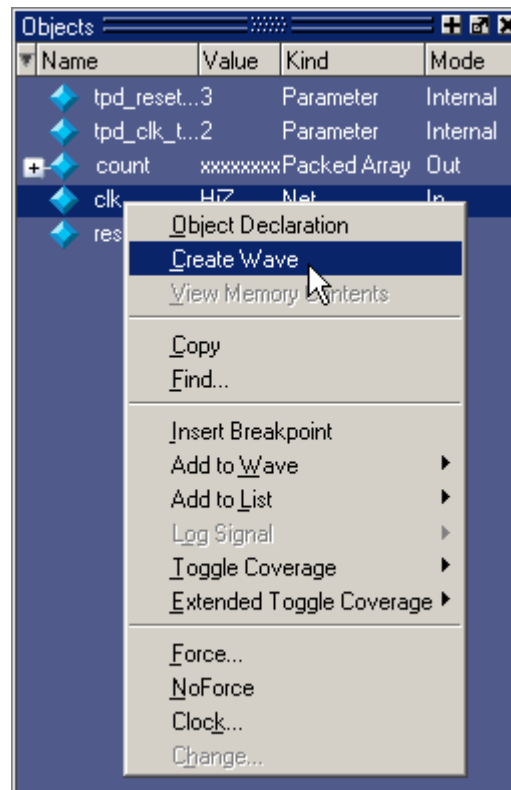

This opens the Create Pattern Wizard dialog where you specify the type of pattern (Clock, Repeater, etc.) and a start and end time.


- b. The default pattern is Clock, which is what we need, so click **Next** (Figure 8-2).

Figure 8-2. Create Pattern Wizard

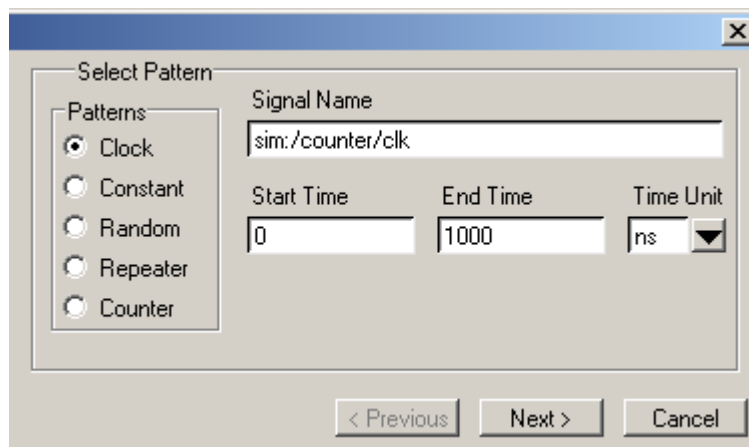


- c. In the second dialog of the wizard, enter **1** for Initial Value. Leave everything else as is and click **Finish** (Figure 8-3).

Figure 8-3. Specifying Clock Pattern Attributes

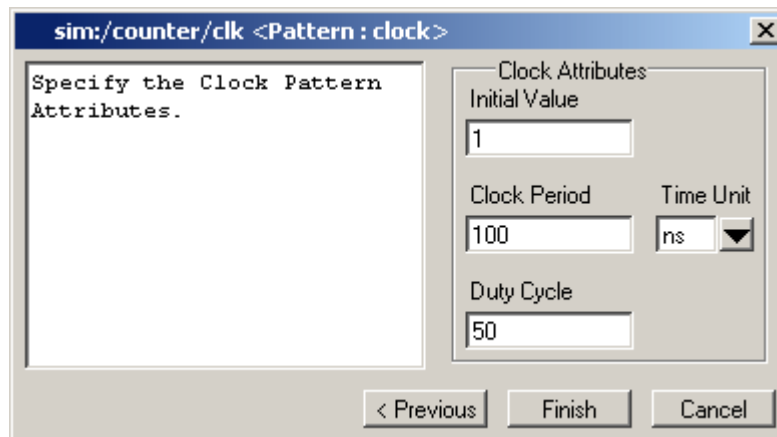

A generated waveform appears in the Wave window (Figure 8-4). Notice the small red dot on the waveform icon and the prefix "Edit:". These items denote an editable wave. (You may want to undock the Wave window.)


Figure 8-4. The *clk* Waveform

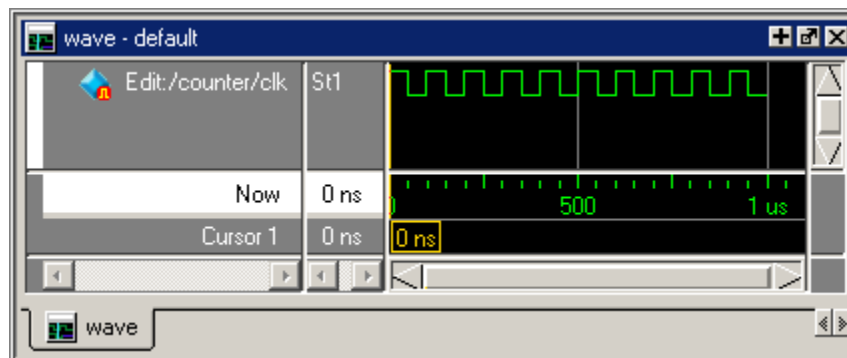

2. Create a second wave using the wizard.
 - a. Right-click signal *reset* in the Objects pane and select Create Wave.
 - b. Select Constant for the pattern type and click Next.
 - c. Enter **0** for the Value and click Finish.

A second generated waveform appears in the Wave window (Figure 8-5).

Figure 8-5. The *reset* Waveform

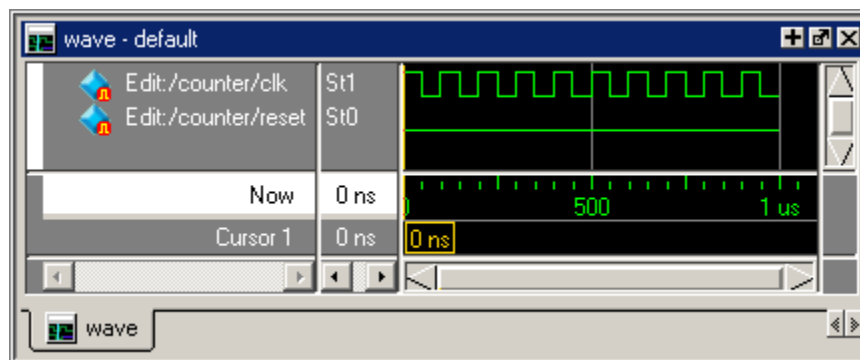

Editing Waveforms in the Wave Window

Waveform Editor gives you numerous commands for interactively editing waveforms (e.g., invert, mirror, stretch edge, cut, paste, etc.). You can access these commands via the menus, toolbar buttons, or via keyboard and mouse shortcuts. You will try out several commands in this part of the exercise.


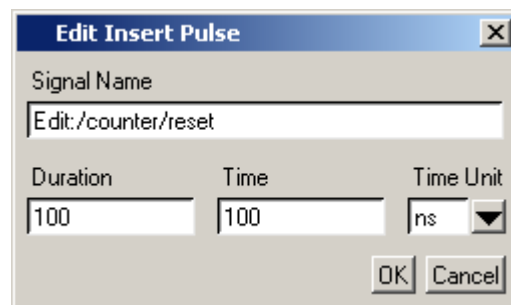
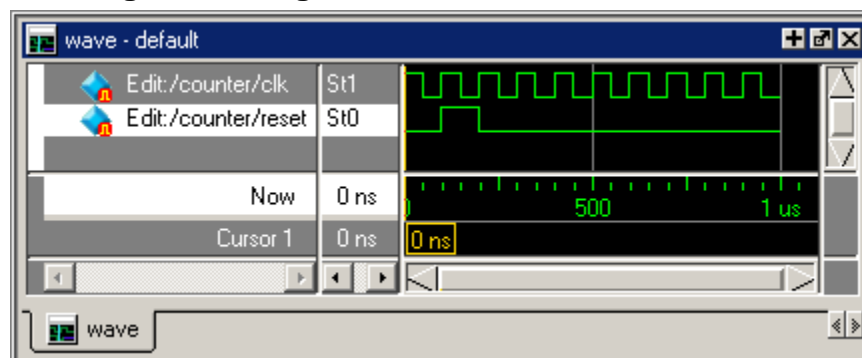
1. Insert a pulse on signal *reset*.
 - a. Click the Edit Mode icon in the toolbar. 
 - b. In the Wave window, click the *reset* signal so it is selected.
 - c. In the waveform pane of the Wave window, right-click on the *reset* signal waveform and select **Wave > Insert Pulse**.
 - d. In the Edit Insert Pulse dialog, enter **100** in the Duration field and **100** in the Time field (Figure 8-6), and click OK.

Figure 8-6. Edit Insert Pulse Dialog



Signal *reset* now goes high from 100 ns to 200 ns (Figure 8-7).


Figure 8-7. Signal *reset* with an Inserted Pulse



2. Stretch an edge on signal *clk*.
 - a. Click the signal *clk* waveform just to the right of the transition at 350 ns. The cursor should snap to the transition.


- b. Right-click that same transition and select **Wave > Stretch Edge** from the menu bar.
If the command is dimmed out, the cursor probably isn't on the edge at 350 ns.
- c. In the Edit Stretch Edge dialog, enter 50 for Duration, make sure the Time field shows 350, and then click OK (Figure 8-8).

Figure 8-8. Edit Stretch Edge Dialog

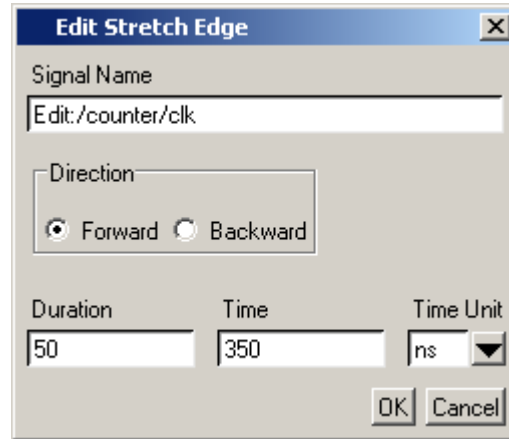

The wave edge stretches so it is high from 300 to 400 ns (Figure 8-9).

Figure 8-9. Stretching an Edge on the *clk* Signal

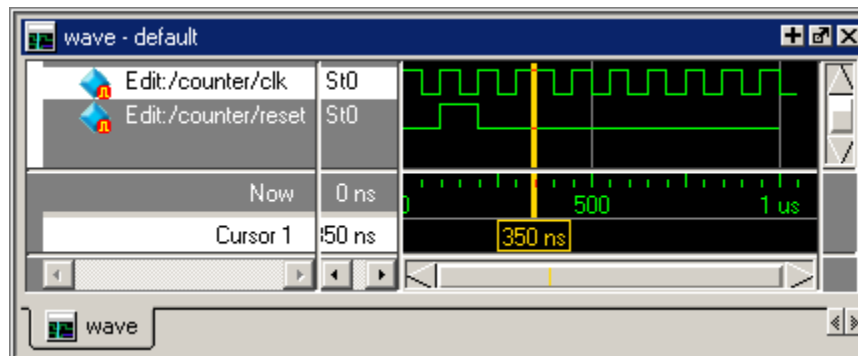

Note the difference between stretching and moving an edge—the Stretch command moves an edge by moving other edges on the waveform (either increasing waveform duration or deleting edges at the beginning of simulation time); the Move command moves an edge but does not move other edges on the waveform. You should see in the Wave window that the waveform for signal *clk* now extends to 1050 ns.

3. Delete an edge.
 - a. Click signal *clk* just to the right of the transition at 400 ns.


The cursor should "snap" to 400 ns.

- b. Click the Delete Edge icon.



This opens the Edit Delete Edge dialog. The Time is already set to 400 ns. Click OK. The edge is deleted and *clk* now stays high until 500 ns (Figure 8-10).

Figure 8-10. Deleting an Edge on the *clk* Signal

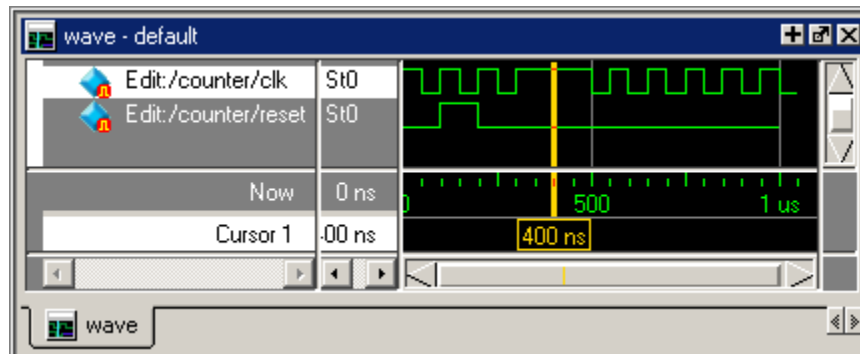

4. Undo and redo an edit.

- a. Click the Undo icon.



The Edit Undo dialog opens, allowing you to select the Undo Count - the number of past actions to undo. Click OK with the Undo Count set to 1 and the deleted edge at 400 ns reappears.

- b. Click the Redo icon.



The edge is deleted again. You can undo and redo any number of editing operations *except* extending all waves and changing drive types. Those two edits cannot be undone.

Saving and Reusing the Wave Commands

You can save the commands that ModelSim used to create the waveforms. You can load this "format" file at a later time to re-create the waves. In this exercise, we will save the commands, quit and reload the simulation, and then open the format file.

1. Save the wave commands to a format file.
 - a. Select **File > Close** in the menu bar and you will be prompted to save the wave commands.
 - b. Click Yes.
 - c. Type **waveedit.do** in the File name field of the Save Commands dialog that opens and then click Save.

This saves a DO file named *waveedit.do* to the current directory and closes the Wave window.
2. Quit and then reload the simulation.
 - a. In the Main window, select **Simulate > End Simulation**, and click Yes to confirm you want to quit simulating.
 - b. Double-click the *counter* design unit in the **work** library, shown in the Library tab, to reload the simulation.
3. Open the format file.
 - a. Select **View > Wave** to open the Wave window.
 - b. Select **File > Load** from the menu bar.
 - c. Double-click *waveedit.do* to open the file.


The waves you created earlier in the lesson reappear. If waves do not appear, you probably did not load the *counter* design unit.

Exporting the Created Waveforms

At this point you can run the simulation or you can export the created waveforms to one of four stimulus file formats. You will run the simulation in a minute but first let us export the created waveforms so we can use them later in the lesson.

1. Export the created waveforms in an HDL testbench format.
 - a. Select **File > Export > Waveform**.
 - b. Select Verilog Testbench (or VHDL Testbench if you are using the VHDL sample files).
 - c. Enter **1000** for End Time if necessary.
 - d. Enter **export** in the File Name field and click OK (Figure 8-11).

Figure 8-11. The Export Waveform Dialog

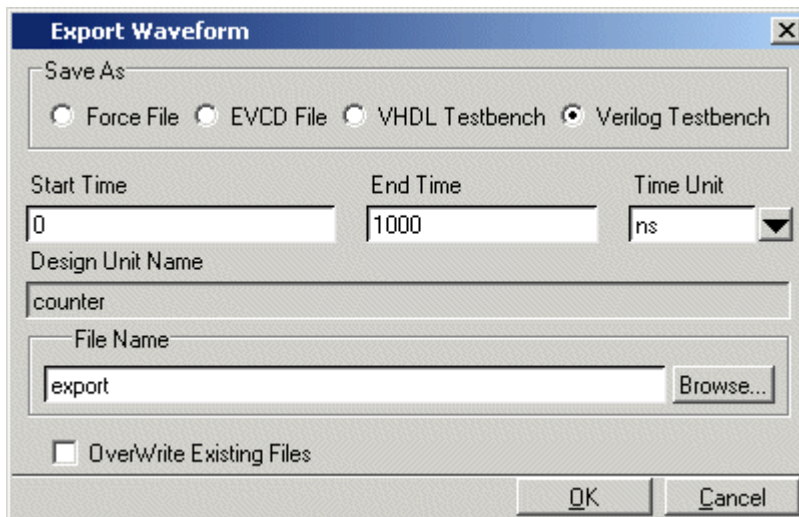

ModelSim creates a file named *export.v* (or *export.vhd*) in the current directory. Later in the lesson we will compile and simulate the file.

2. Export the created waveforms in an extended VCD format.
 - a. Select **File > Export > Waveform**.
 - b. Select EVCD File.
 - c. Enter **1000** for End Time if necessary and click OK.

ModelSim creates an extended VCD file named *export.vcd*. We will import this file later in the lesson.

Running the Simulation

Once you have finished editing the waveforms, you can run the simulation straight away.

1. Add a design signal.
 - a. In the Objects pane, right-click *count* and select **Add to Wave > Selected Signals**.

The signal is added to the Wave window.


2. Run the simulation.

- a. Click the Run -All icon.



The simulation runs for 1000 ns and the waveform is drawn for *sim:/counter/count* (Figure 8-12).

Figure 8-12. The counter Waveform Reacts to Stimulus Patterns

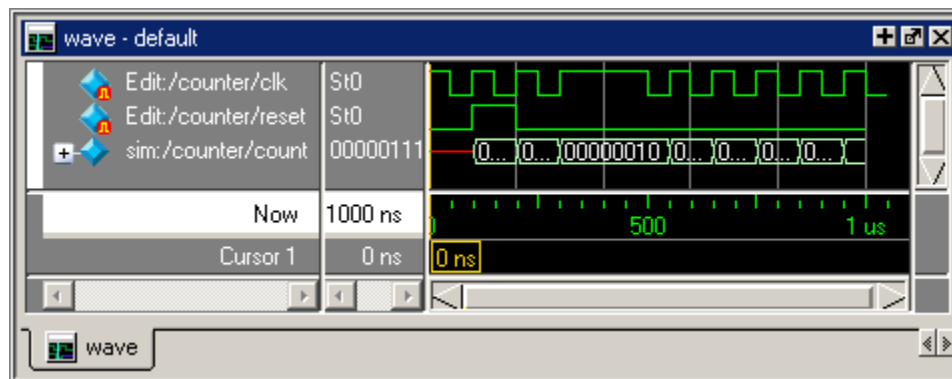

Look at the signal transitions for *count* from 300 ns to 500 ns. The transitions occur when *clk* goes high, and you can see that *count* follows the pattern you created when you edited *clk* by stretching and deleting edges.

3. Quit the simulation.
 - a. In the Main window, select **Simulate > End Simulation**, and click Yes to confirm you want to quit simulating.


Simulating with the Testbench File

Earlier in the lesson you exported the created waveforms to a testbench file. In this exercise you will compile and load the testbench and then run the simulation.

1. Compile and load the testbench.
 - a. At the ModelSim prompt, enter **vlog export.v** (or **vcom export.vhd** if you are working with VHDL files).

You should see a design unit named *export* appear in the Library tab ([Figure 8-13](#)).


Figure 8-13. The *export* Testbench Compiled into the work Library

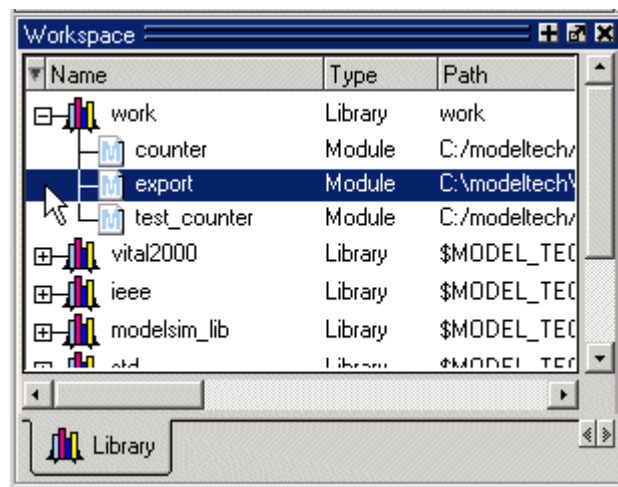

- b. Double-click *export* on the Library tab to load the design.
2. Add waves and run the design.
 - a. At the VSIM> prompt, type **add wave ***.
 - b. Next type **run 1000**.

The waveforms in the Wave window match those you saw in the last exercise ([Figure 8-14](#)).

Figure 8-14. Waves from Newly Created Testbench

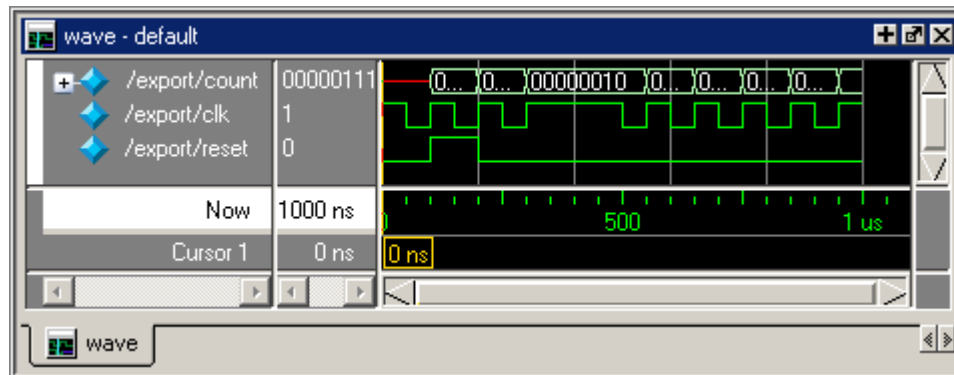

3. Quit the simulation.
 - a. In the Main window, select **Simulate > End Simulation**, and click Yes to confirm you want to quit simulating.


Importing an EVCD File

Earlier in the lesson you exported the created waveforms to an extended VCD file. In this exercise you will use that file to stimulate the *counter* design unit.

1. Load the *counter* design unit and add waves.
 - a. Double-click *counter* on the Library tab.
 - b. In the Objects pane, right-click *count* and select **Add to Wave > Selected Signals**.
2. Import the VCD file.
 - a. Make sure the Wave window is active, then select **File > Import > EVCD** from the menu bar.
 - b. Double-click *export.vcd*.

The created waveforms draw in the Wave window (Figure 8-15).

Figure 8-15. EVCD File Loaded in Wave Window

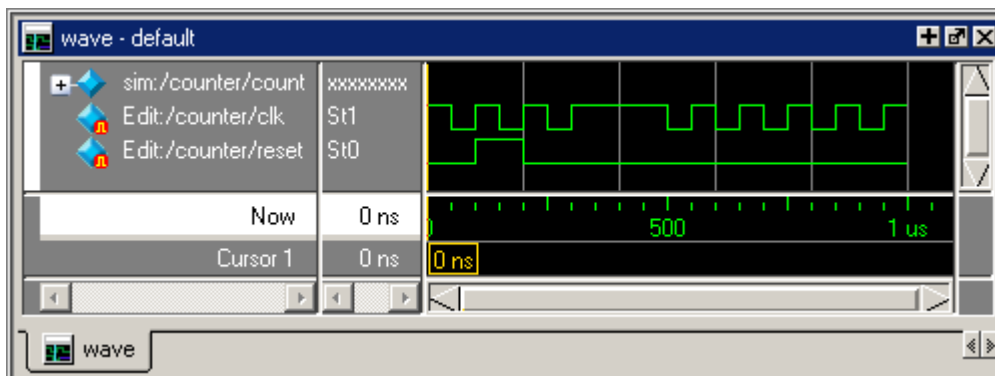


- c. Click the Run -All icon.



The simulation runs for 1000 ns and the waveform is drawn for *sim:/counter/count* (Figure 8-16).

Figure 8-16. Simulation results with EVCD File

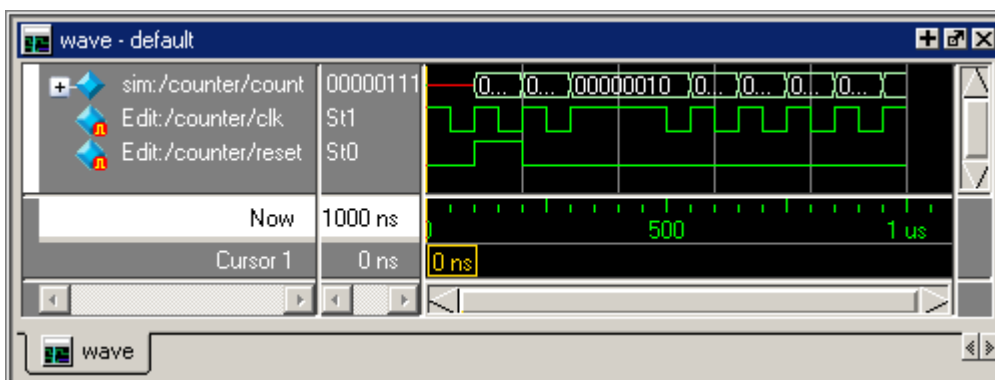

When you import an EVCD file, signal mapping happens automatically if signal names and widths match. If they do not, you have to manually map the signals. Refer to the section [Signal Mapping and Importing EVCD Files](#) in the User's Manual for more information.

Lesson Wrap-Up

This concludes this lesson. Before continuing we need to end the current simulation.

1. In the Main window, select **Simulate > End Simulation**. Click Yes.

Chapter 9

Debugging With The Dataflow Window

Introduction

The Dataflow window allows you to explore the "physical" connectivity of your design; to trace events that propagate through the design; and to identify the cause of unexpected outputs. The window displays processes; signals, nets, and registers; and interconnect.

Note

The functionality described in this lesson requires a dataflow license feature in your ModelSim license file. Please contact your Mentor Graphics sales representative if you currently do not have such a feature.

Design Files for this Lesson

The sample design for this lesson is a testbench that verifies a cache module and how it works with primary memory. A processor design unit provides read and write requests.

The pathnames to the files are as follows:

Verilog – *<install_dir>/examples/tutorials/verilog/dataflow*

VHDL – *<install_dir>/examples/tutorials/vhdl/dataflow*

This lesson uses the Verilog version in the examples. If you have a VHDL license, use the VHDL version instead. When necessary, we distinguish between the Verilog and VHDL versions of the design.

Related Reading

User's Manual Sections: [Tracing Signals with the Dataflow Window](#) and [Dataflow Window](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

Note



When you have completed the tutorial, remeber to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Compiling and Loading the Design

In this exercise you will use a DO file to compile and load the design.

1. Create a new directory and copy the tutorial files into it.

Start by creating a new directory for this exercise (in case other users will be working with these lessons). Create the directory and copy all files from `<install_dir>/examples/tutorials/verilog/dataflow` to the new directory.

If you have a VHDL license, copy the files in `<install_dir>/examples/tutorials/vhdl/dataflow` instead.

2. Start ModelSim and change to the exercise directory.

If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.

- a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.

If the Welcome to ModelSim dialog appears, click **Close**.

- b. Select **File > Change Directory** and change to the directory you created in step 1.

3. Execute the lesson DO file.

- a. Type **do run.do** at the ModelSim> prompt.

The DO file does the following:

- Creates the working library
- Compiles the design files
- Opens the Dataflow window

- Adds signals to the Wave window
- Logs all signals in the design
- Runs the simulation


Feel free to open the DO file and look at its contents.

Exploring Connectivity

A primary use of the Dataflow window is exploring the "physical" connectivity of your design. You do this by expanding the view from process to process. This allows you to see the drivers/receivers of a particular signal, net, or register.

1. Add a signal to the Dataflow window.
 - a. Make sure instance *p* is selected in the sim tab of the Workspace pane.
 - b. Drag signal *strb* from the Objects pane to the Dataflow window ([Figure 9-1](#)).


Figure 9-1. A Signal in the Dataflow Window

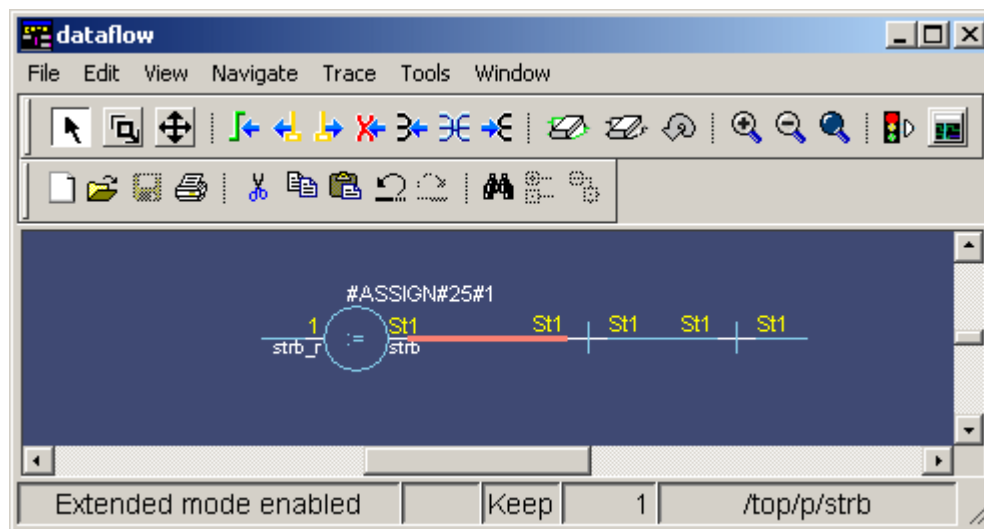

2. Explore the design.
 - a. Double-click the net highlighted in red.

The view expands to display the processes that are connected to *strb* ([Figure 9-2](#)).


Figure 9-2. Expanding the View to Display Connected Processes

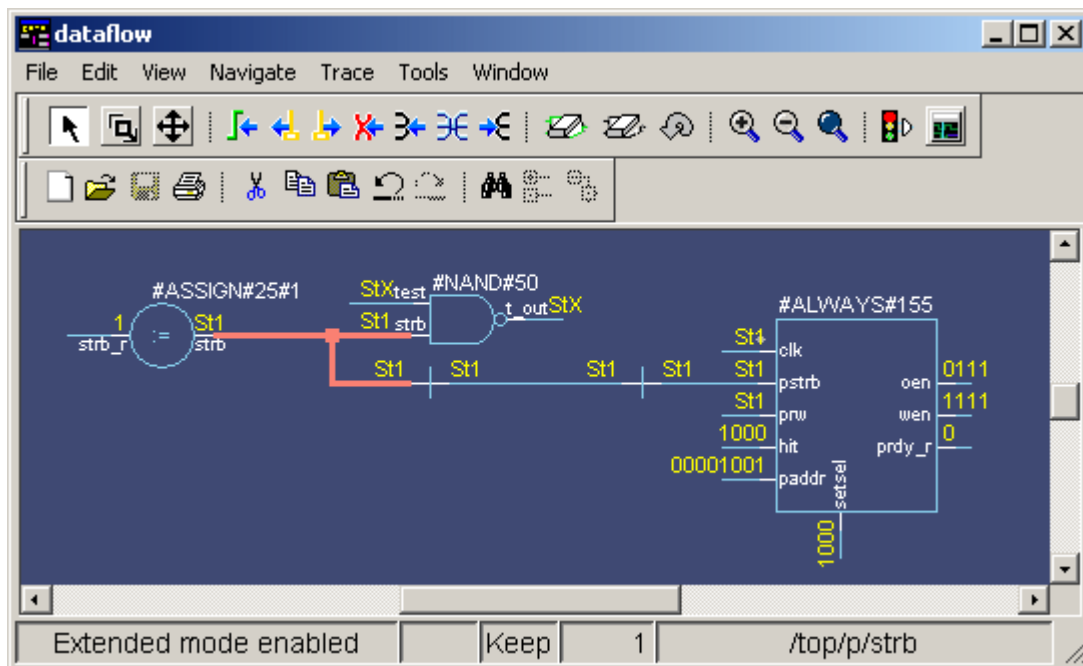

Select signal *test* on process #NAND#50 (labeled *line_71* in the VHDL version) and click the **Expand net to all drivers** icon.



Figure 9-3. The *test* Net Expanded to Show All Drivers

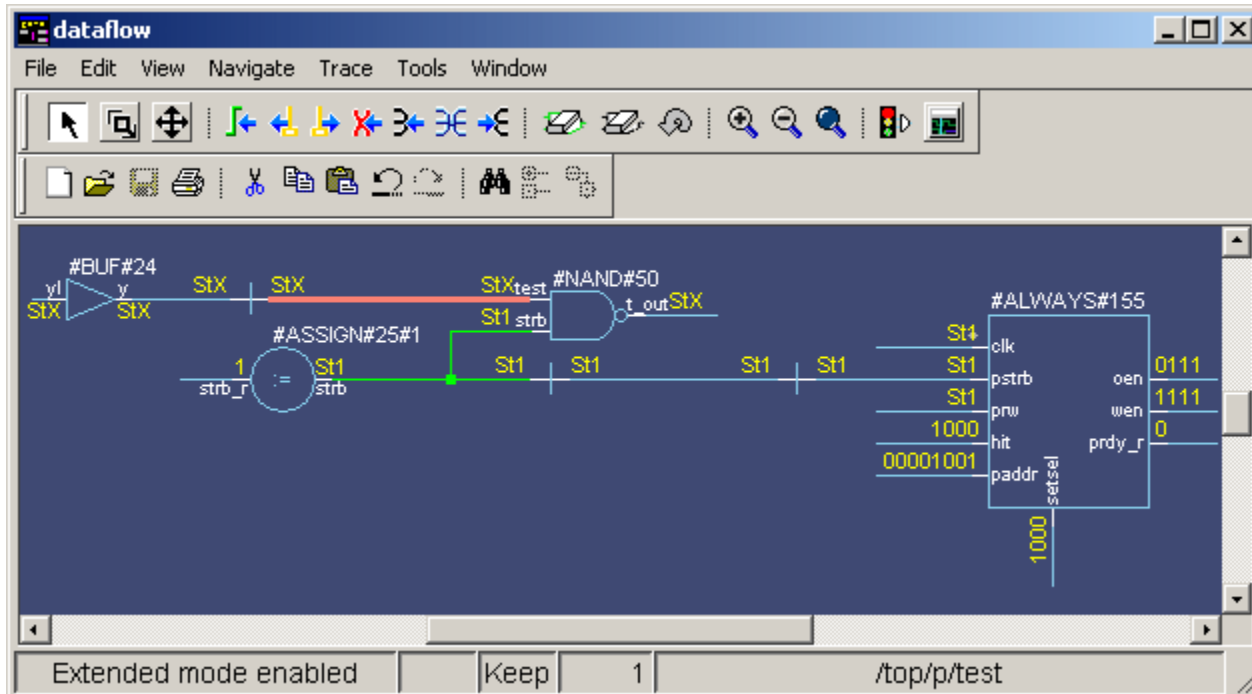

Notice that after the display expands, the signal line for *strb* is highlighted in green. This highlighting indicates the path you have traversed in the design.

Select signal *oen* on process *#ALWAYS#155*(labeled *line_84* in the VHDL version), and click the **Expand net to all readers** icon.



Continue exploring if you wish.

When you are done, click the **Erase All** icon.




Tracing Events

Another useful debugging feature is tracing events that contribute to an unexpected output value. Using the Dataflow window's embedded wave viewer, you can trace backward from a transition to see which process or signal caused the unexpected output.


1. Add an object to the Dataflow window.
 - a. Make sure instance *p* is selected in the sim tab of the Main window.
 - b. Drag signal *t_out* from the Objects pane into the Dataflow window.
 - c. Select **View > Show Wave** in the Dataflow window to open the wave viewer (Figure 9-4). You may need to increase the size of the Dataflow window and scroll the panes to see everything.

Figure 9-4. The embedded wave viewer pane

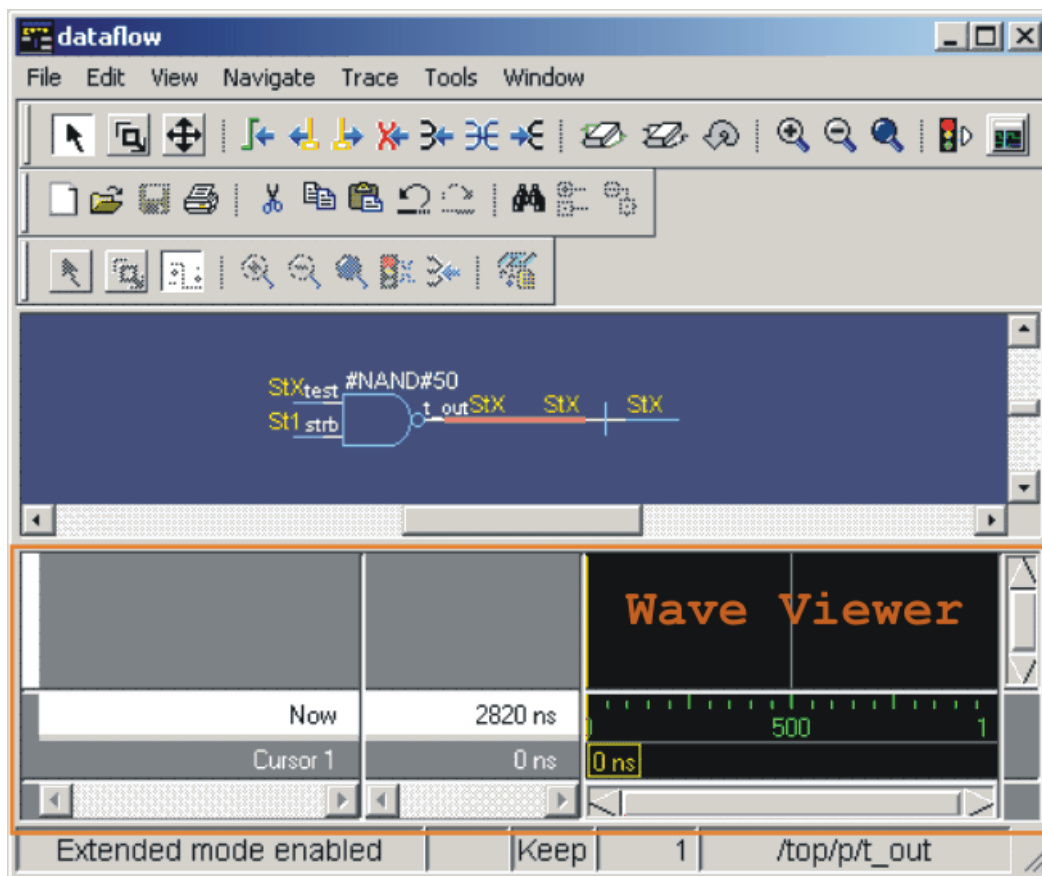

2. Trace the inputs of the nand gate.
 - a. Select process *#NAND#50* (labeled *line_71* in the VHDL version) in the dataflow pane. All input and output signals of the process are displayed in the wave viewer (Figure 9-5).


Figure 9-5. Signals Added to the Wave Viewer Automatically

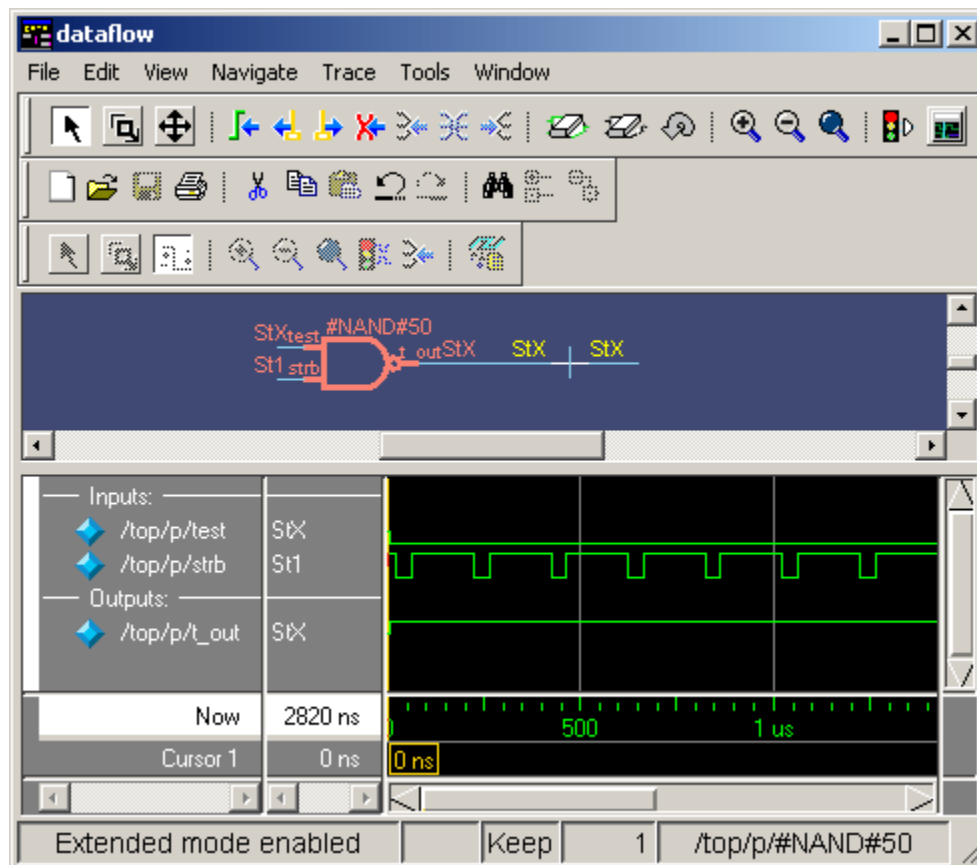

- b. In the wave view, scroll to time 2785 ns (the last transition of signal `t_out`).
- c. Click just to the right of the last transition of signal `t_out`. The cursor should snap to time 2785 ns.
- d. Select **Trace > Trace next event** to trace the first contributing event.

ModelSim adds a cursor marking the last event, the transition of the strobe to 0 at 2745 ns, which caused the output of 1 on `t_out` (Figure 9-6).


Figure 9-6. Cursor in Wave Viewer Marks Last Event

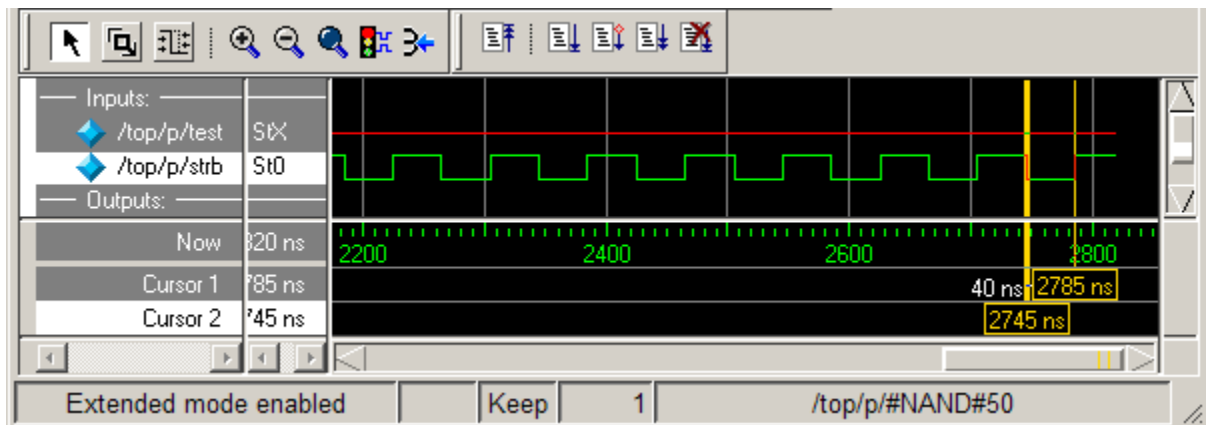

- e. Select **Trace > Trace next event** two more times.
- f. Select **Trace > Trace event set**.

The dataflow pane sprouts to the preceding process and shows the input driver of signal *strb* (Figure 9-7). Notice too that the wave viewer now shows the input and output signals of the newly selected process.

Figure 9-7. Tracing the Event Set

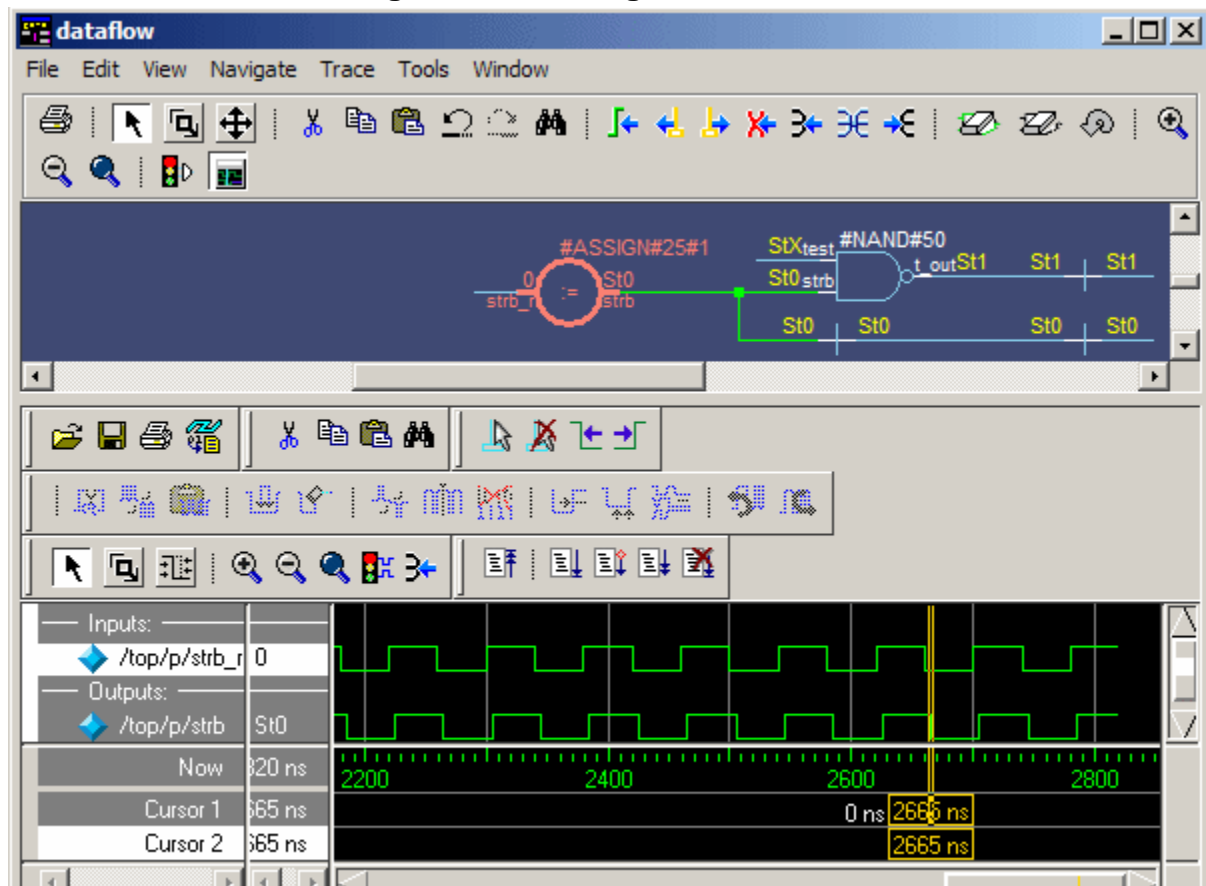

You can continue tracing events through the design in this manner: select **Trace next event** until you get to a transition of interest in the wave viewer, and then select **Trace event set** to update the dataflow pane.

3. Select **File > Close** to close the Dataflow window.


Tracing an X (Unknown)

The Dataflow window lets you easily track an unknown value (X) as it propagates through the design. The Dataflow window is linked to the stand-alone Wave window, so you can view signals in the Wave window and then use the Dataflow window to track the source of a problem. As you traverse your design in the Dataflow window, appropriate signals are added automatically to the Wave window.

1. View t_out in the Wave and Dataflow windows.
 - a. Scroll in the Wave window until you can see `/top/p/t_out`.

t_out goes to an unknown state, StX, at 2065 ns and continues transitioning between 1 and unknown for the rest of the run (Figure 9-8). The red color of the waveform indicates an unknown value.

Figure 9-8. A Signal with Unknown Values

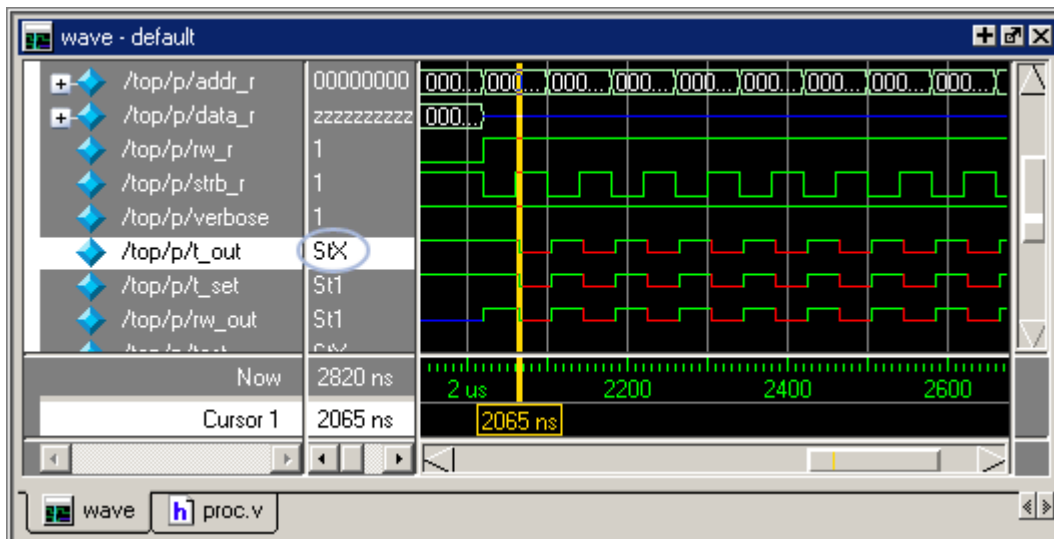

- b. Double-click the t_out waveform at the last transition of signal t_out at 2785 ns.

This automatically opens the Dataflow window and displays t_out , its associated process, and its waveform. You may need to increase the size of the Dataflow window and scroll the panes to see everything.


- c. Move the cursor in the Wave window.

As previously mentioned the Wave and Dataflow windows are designed to work together. As you move the cursor in the Wave, the value of t_{out} changes in the Dataflow window.

- d. Move the cursor to a time when t_{out} is unknown (e.g., 2725 ns).
2. Trace the unknown.
 - a. In the Dataflow window, make sure t_{out} is selected and then select **Trace > ChaseX**.

The design expands to show the source of the unknown (Figure 9-9). In this case there is a HiZ (U in the VHDL version) on input signal $test_in$ and a 0 on input signal rw (bar_rw in the VHDL version), so output signal $test2$ resolves to an unknown.

Figure 9-9. ChaseX Identifies Cause of Unknown on t_{out}

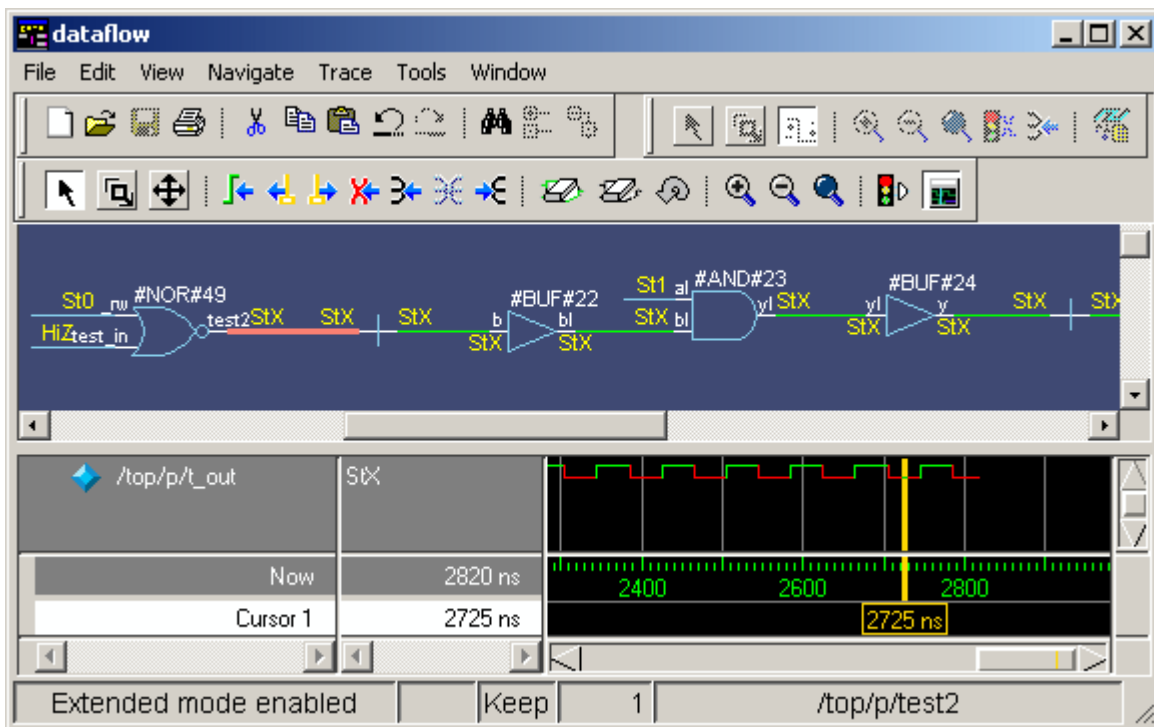

Scroll to the bottom of the Wave window, and you will see that all of the signals contributing to the unknown value have been added.

3. Clear the Dataflow window before continuing.
 - a. Click the **Erase All** icon to clear the Dataflow view.
 - b. Click the Show Wave icon to close the Wave view of the Dataflow window.


Displaying Hierarchy in the Dataflow Window

You can display connectivity in the Dataflow window using hierarchical instances. You enable this by modifying the options prior to adding objects to the window.

1. Change options to display hierarchy.
 - a. Select **Tools > Options** from the Dataflow window menu bar.
 - b. Check **Show Hierarchy** and then click **OK**.
2. Add signal *t_out* to the Dataflow window.
 - a. Type **add dataflow /top/p/t_out** at the VSIM> prompt.

The Dataflow window will display *t_out* and all hierarchical instances (Figure 9-10).

Figure 9-10. Displaying Hierarchy in the Dataflow Window

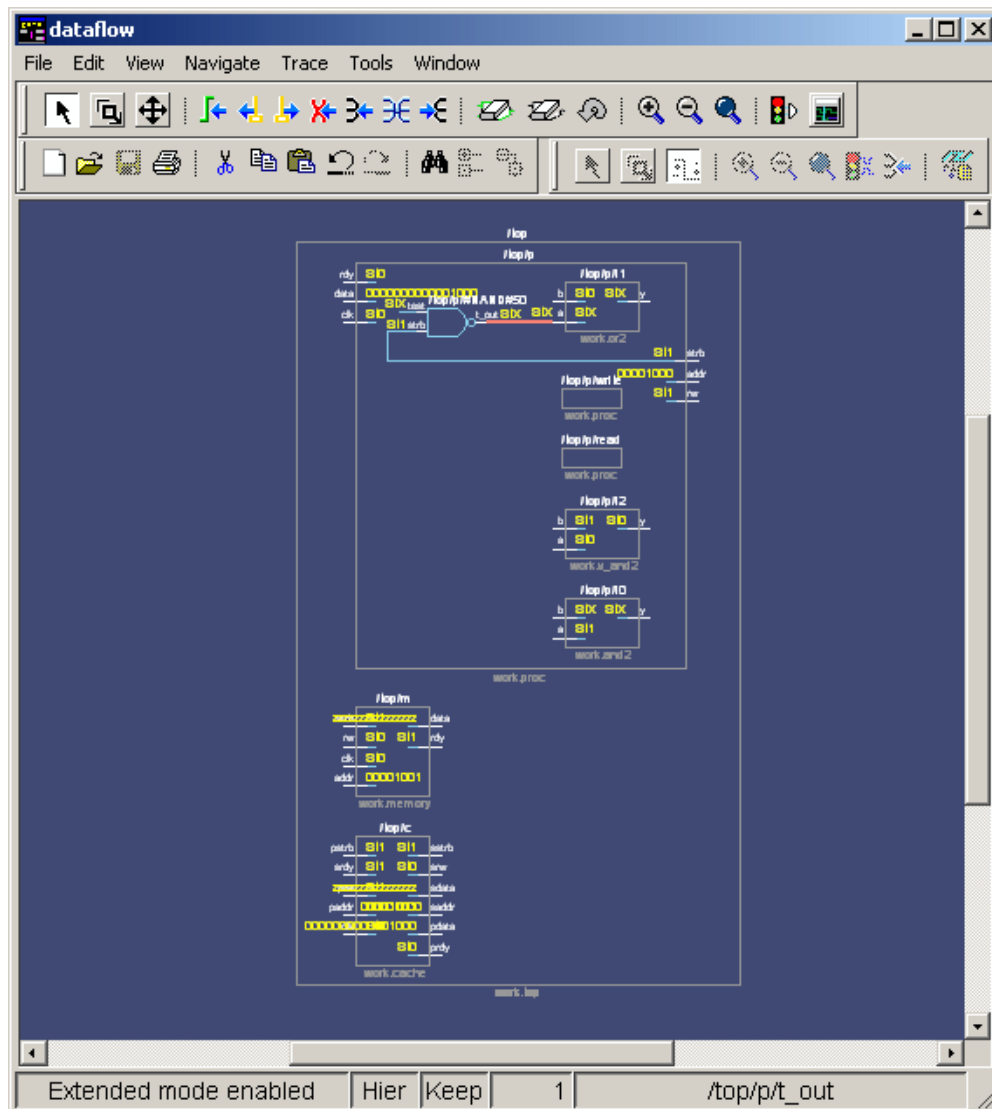

Lesson Wrap-Up

This concludes this lesson. Before continuing we need to end the current simulation.

1. Type **quit -sim** at the VSIM> prompt.

Chapter 10

Viewing And Initializing Memories

Introduction

In this lesson you will learn how to view and initialize memories in ModelSim. ModelSim defines and lists as memories any of the following:

- reg, wire, and std_logic arrays
- Integer arrays
- Single dimensional arrays of VHDL enumerated types other than std_logic

Design Files for this Lesson

The ModelSim installation comes with Verilog and VHDL versions of the example design. The files are located in the following directories:

Verilog – *<install_dir>/examples/tutorials/verilog/memory*

VHDL – *<install_dir>/examples/tutorials/vhdl/memory*

This lesson uses the Verilog version for the exercises. If you have a VHDL license, use the VHDL version instead.

Related Reading

User's Manual Section: [Memory Panes](#).

Reference Manul commands: [mem display](#), [mem load](#), [mem save](#), and [radix](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)) . When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.



Note

When you have completed the tutorial, remember to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Compiling and Loading the Design

1. Create a new directory and copy the tutorial files into it.

Start by creating a new directory for this exercise (in case other users will be working with these lessons). Create the directory and copy all files from `<install_dir>/examples/tutorials/verilog/memory` to the new directory.

If you have a VHDL license, copy the files in `<install_dir>/examples/tutorials/vhdl/memory` instead.

2. Start ModelSim and change to the exercise directory.

If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.

- a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.

If the Welcome to ModelSim dialog appears, click **Close**.

- b. Select **File > Change Directory** and change to the directory you created in step 1.

3. Create the working library and compile the design.

- a. Type **vlib work** at the ModelSim> prompt.

- b. **Verilog:**

Type **vlog sp_syn_ram.v dp_syn_ram.v ram_tb.v** at the ModelSim> prompt.

VHDL:

Type **vcom -93 sp_syn_ram.vhd dp_syn_ram.vhd ram_tb.vhd** at the ModelSim> prompt.

4. Load the design.


- a. On the Library tab of the Main window Workspace, click the "+" icon next to the *work* library.

- b. Double-click the *ram_tb* design unit to load the design.

Viewing a Memory and its Contents

The Memories tab of the Main window lists all memories in the design (Figure 10-1) when the design is loaded; with the range, depth, and width of each memory displayed.

Figure 10-1. Viewing the Memories Tab in the Main Window Workspace

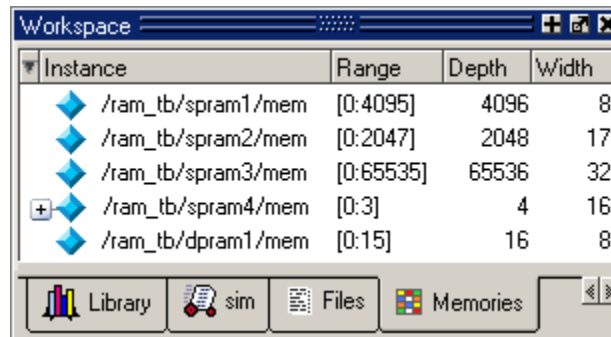


VHDL: The radix for enumerated types is Symbolic. To change the radix to binary for the purposes of this lesson, type the following command at the vsim prompt:

VSIM> **radix bin**

1. Open a Memory instance to show its contents.
 - a. Double-click the `/ram_tb/spram1/mem` instance in the memories list to view its contents in the MDI frame.

A **mem** tab is created in the MDI frame to display the memory contents. The data are all **X** (**0** in VHDL) since you have not yet simulated the design. The first column (blue hex characters) lists the addresses (Figure 10-2), and the remaining columns show the data values.

Figure 10-2. The mem Tab in the MDI Frame Shows Addresses and Data

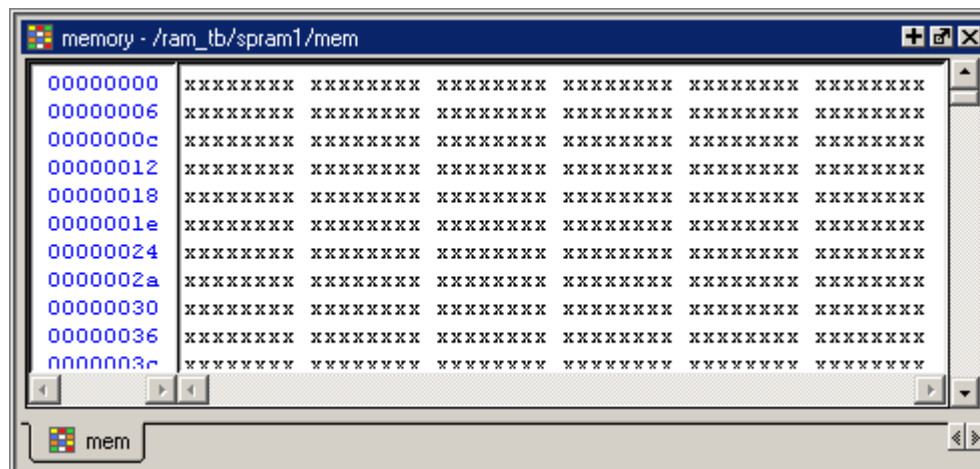

- b. Double-click instance `/ram_tb/spram2/mem` in the Memories tab of the Workspace. This creates a new tab in the MDI frame called **mem(1)** that contains the addresses and data for the `spram2` instance. Each time you double-click a new memory instance in the Workspace, a new tab is created for that instance in the MDI frame.
2. Simulate the design.


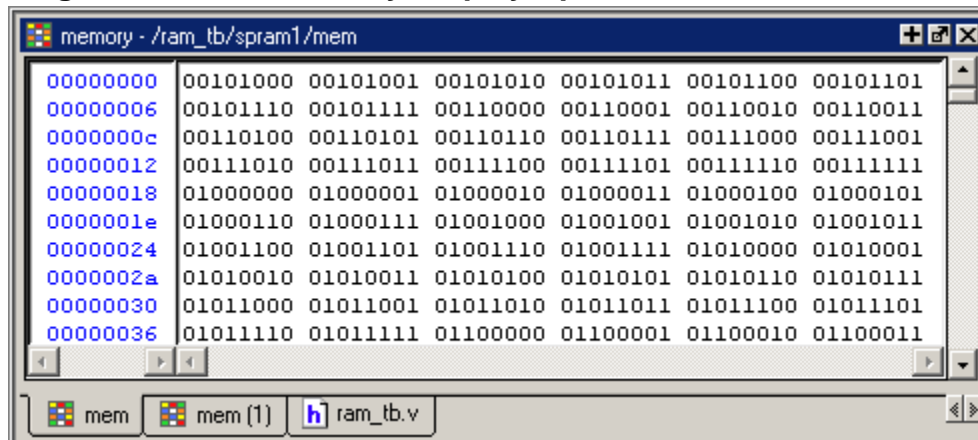
- a. Click the **run -all** icon in the Main window. 
- b. Click the **mem** tab of the MDI frame to bring the `/ram_tb/spram1/mem` to the foreground. The data fields now show values ([Figure 10-3](#)).

Figure 10-3. The Memory Display Updates with the Simulation




VHDL:

In the Transcript pane, you will see NUMERIC_STD warnings that can be ignored and an assertion failure that is functioning to stop the simulation. The simulation itself has not failed.

3. Change the address radix and the number of words per line for instance `/ram_tb/spram1/mem`.
 - a. Right-click anywhere in the Memory Contents pane and select **Properties**.
 - b. The Properties dialog box opens ([Figure 10-4](#)).


Figure 10-4. Changing the Address Radix

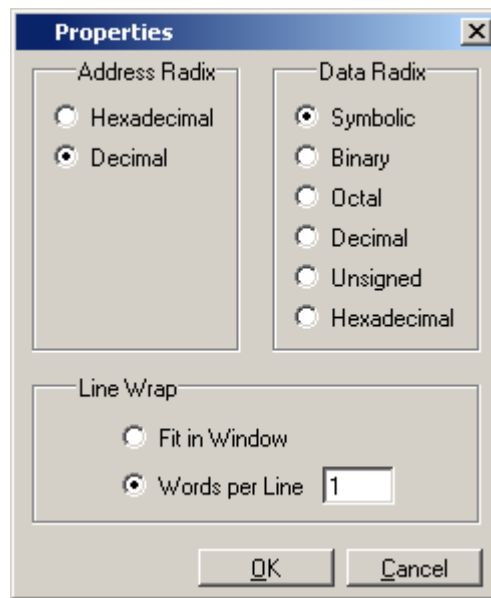

- c. For the **Address Radix**, select **Decimal**. This changes the radix for the addresses only.
- d. Select **Words per line** and type **1** in the field.
- e. Click OK.

You can see the results of the settings in [Figure 10-5](#). If the figure doesn't match what you have in your ModelSim session, check to make sure you set the Address Radix rather than the Data Radix. Data Radix should still be set to Symbolic, the default.

Figure 10-5. New Address Radix and Line Length

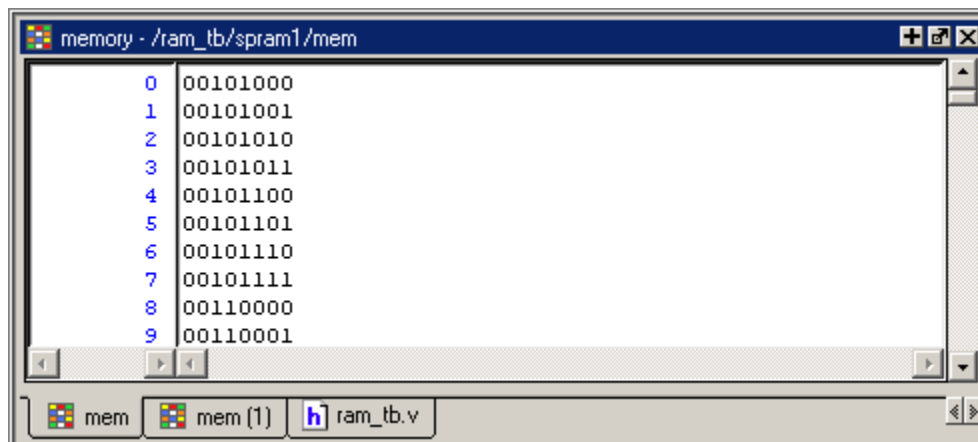


Navigating Within the Memory

You can navigate to specific memory address locations, or to locations containing particular data patterns. First, you will go to a specific address.

1. Use Goto to find a specific address.
 - a. Right-click anywhere in address column and select **Goto** (Figure 10-6).

The Goto dialog box opens in the data pane.

Figure 10-6. Goto Dialog

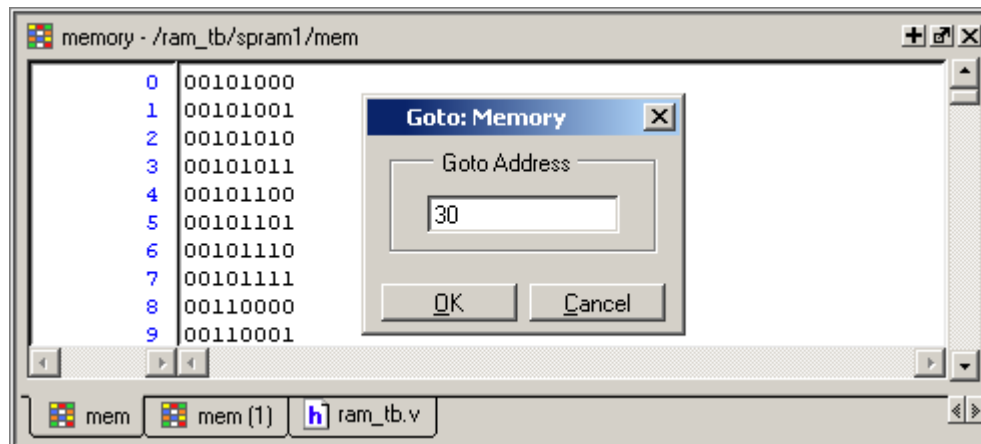


- b. Type **30** in the Goto Address field.
 - c. Click OK.

The requested address appears in the top line of the window.

2. Edit the address location directly.
 - a. To quickly move to a particular address, do the following:
 - b. Double click address 38 in the address column.
 - c. Enter address 100 (Figure 10-7).

Figure 10-7. Editing the Address Directly

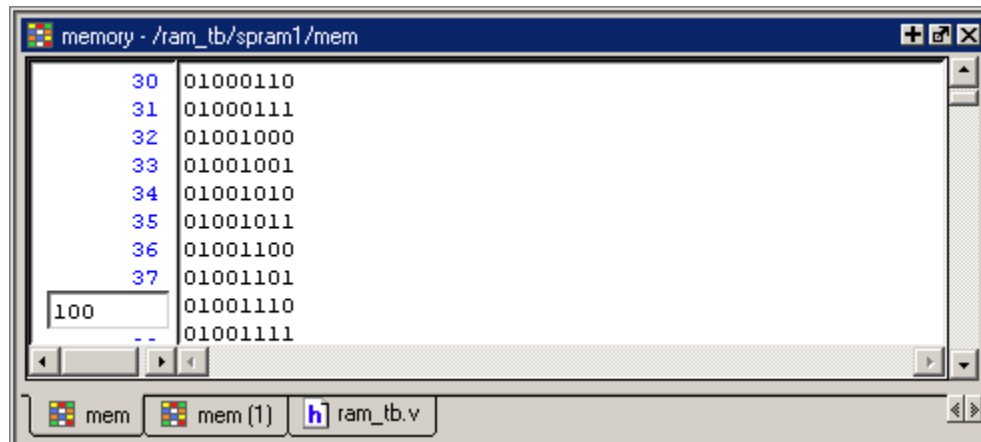

d. Press <Enter> on your keyboard.


The pane scrolls to that address.

3. Now, let's find a particular data entry.

a. Right-click anywhere in the data column and select **Find**.

The Find in dialog box opens (Figure 10-8).

Figure 10-8. Searching for a Specific Data Value

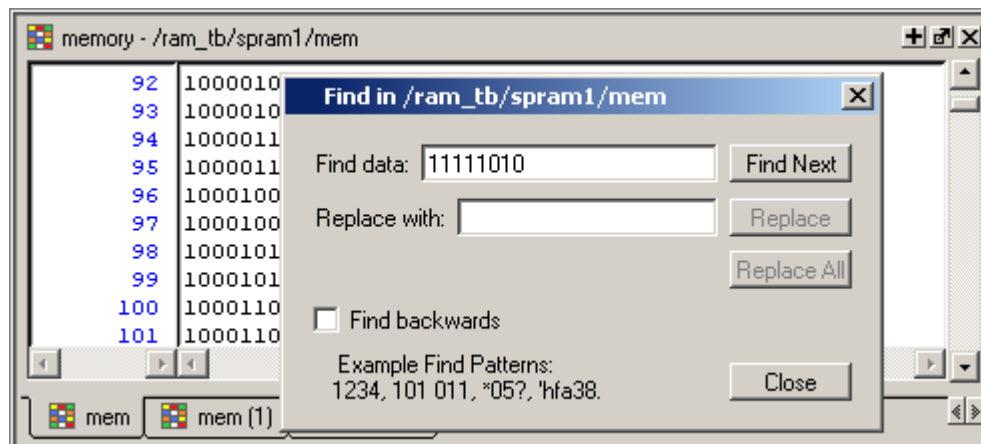

b. Type **11111010** in the **Find data:** field and click **Find Next**.

The data scrolls to the first occurrence of that address. Click **Find Next** a few more times to search through the list.


c. Click **Close** to close the dialog box.

Exporting Memory Data to a File

You can save memory data to a file that can be loaded at some later point in simulation.

1. Export a memory pattern from the `/ram_tb/spram1/mem` instance to a file.
 - a. Make sure `/ram_tb/spram1/mem` is open and selected in the MDI frame.
 - b. Select **File > Export > Memory Data** to bring up the Export Memory dialog box (Figure 10-9).

Figure 10-9. Export Memory Dialog

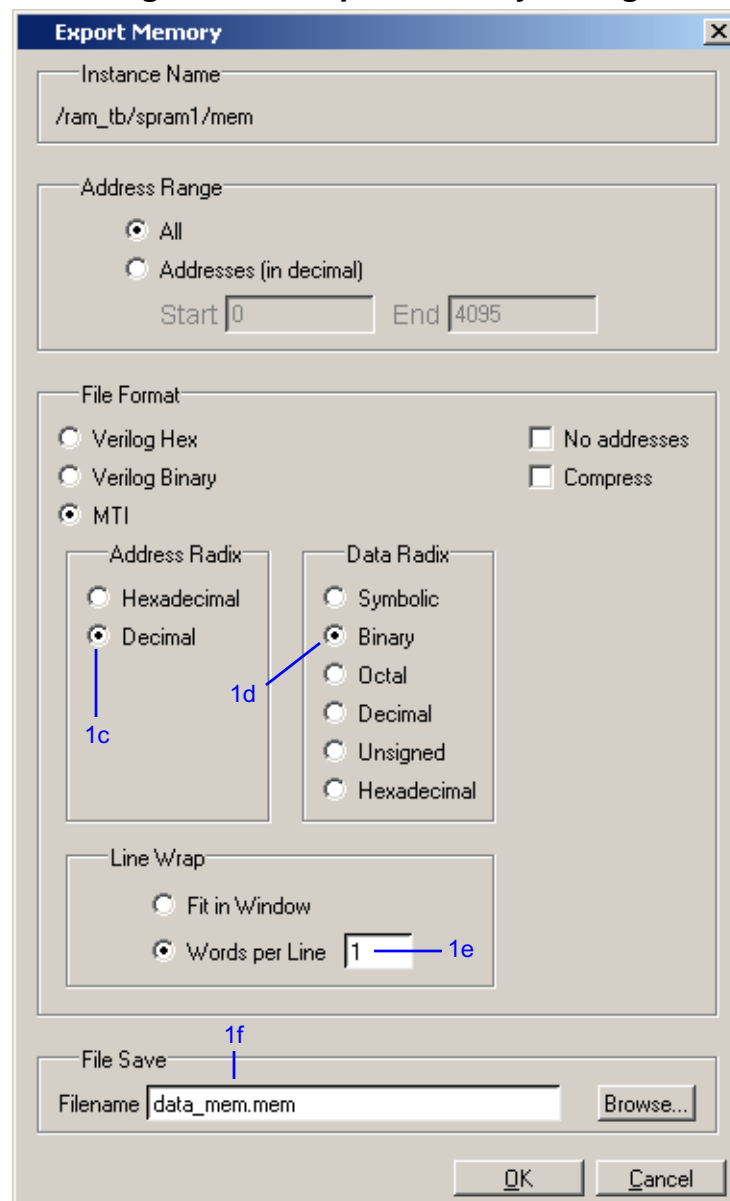

- c. For the Address Radix, select **Decimal**.

- d. For the Data Radix, select **Binary**.
- e. For the Line Wrap, set to 1 word per line.
- f. Type **data_mem.mem** into the Filename field.
- g. Click OK.

You can view the exported file in any editor.

Memory pattern files can be exported as relocatable files, simply by leaving out the address information. Relocatable memory files can be loaded anywhere in a memory because no addresses are specified.

2. Export a relocatable memory pattern file from the */ram_tb/spram2/mem* instance.
 - a. Select the **mem(1)** tab in the MDI pane to see the data for the */ram_tb/spram2/mem* instance.
 - b. Right-click on the memory contents to open a popup menu and select **Properties**.
 - c. In the Properties dialog, set the Address Radix to **Decimal**; the Data Radix to **Binary**; and the Line Wrap to 1 **Words per Line**. Click OK to accept the changes and close the dialog.
 - d. Select **File > Export > Memory Data** to bring up the Export Memory dialog box.
 - e. For the Address Range, specify a Start address of **0** and End address of **250**.
 - f. For the File Format, select **MTI** and click **No addresses** to create a memory pattern that you can use to relocate somewhere else in the memory, or in another memory.
 - g. For Address Radix select **Decimal**, and for Data Radix select **Binary**.
 - h. For the Line Wrap, set 1 **Words per Line**.
 - i. Enter the file name as **reloc.mem**, then click OK to save the memory contents and close the dialog. You will use this file for initialization in the next section.

Initializing a Memory

In ModelSim, it is possible to initialize a memory using one of three methods: from an exported memory file, from a fill pattern, or from both.


First, let's initialize a memory from a file only. You will use one you exported previously, *data_mem.mem*.

1. View instance */ram_tb/spram3/mem*.
 - a. Double-click the */ram_tb/spram3/mem* instance in the Memories tab.

This will open a new tab – **mem(2)** – in the MDI frame to display the contents of */ram_tb/spram3/mem*. Scan these contents so you can identify changes once the initialization is complete.

- b. Right-click and select **Properties** to bring up the Properties dialog.
 - c. Change the Address Radix to **Decimal**, Data Radix to **Binary**, **Line Wrap to 1 Words per Line**, and click OK.
2. Initialize *spram3* from a file.
- a. Right-click anywhere in the data column and select **Import** to bring up the Import Memory dialog box (Figure 10-10).

Figure 10-10. Import Memory Dialog

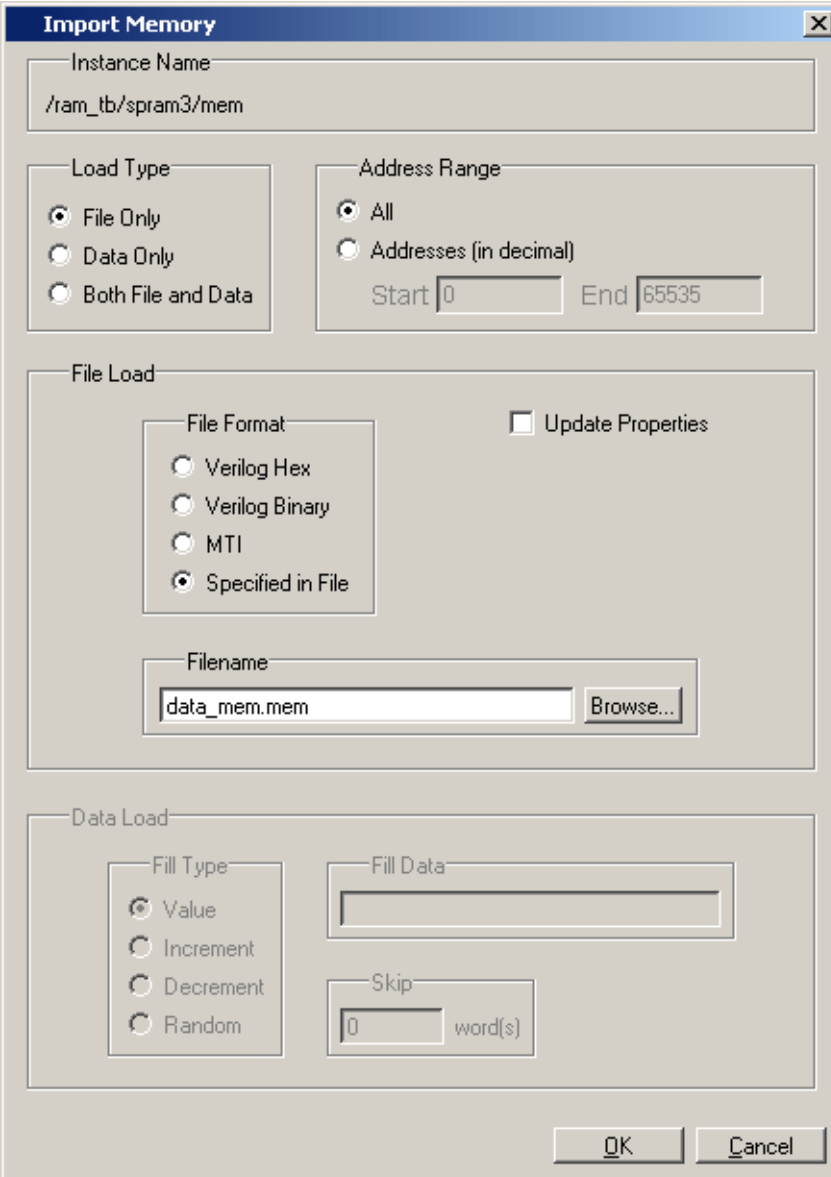

The **Import Memory** dialog box is shown with the following settings:

- Instance Name:** `/ram_tb/spram3/mem`
- Load Type:** ☒ File Only, ☐ Data Only, ☐ Both File and Data
- Address Range:** ☒ All, ☐ Addresses (in decimal). Start: `0`, End: `65535`
- File Load:**
 - File Format:** ☐ Verilog Hex, ☐ Verilog Binary, ☐ MTI, ☒ Specified in File
 - ☐ Update Properties
 - Filename:** `data_mem.mem` (with a **Browse...** button)
- Data Load:**
 - Fill Type:** ☒ Value, ☐ Increment, ☐ Decrement, ☐ Random
 - Fill Data:** (empty text box)
 - Skip:** `0` word(s)


Buttons at the bottom: **OK** and **Cancel**.

The default Load Type is File Only.

- b. Type *data_mem.mem* in the Filename field.
- c. Click OK.

The addresses in instance */ram_tb/spram3/mem* are updated with the data from *data_mem.mem* (Figure 10-11).

Figure 10-11. Initialized Memory from File and Fill Pattern

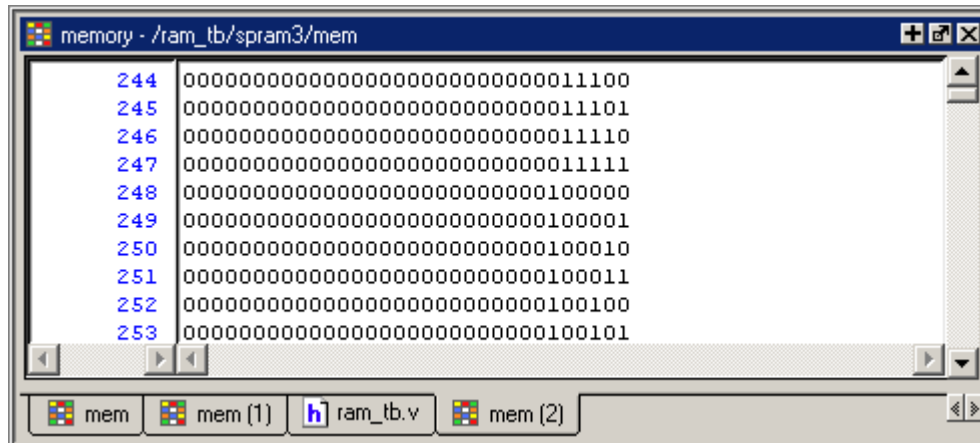

In this next step, you will experiment with importing from both a file and a fill pattern. You will initialize *spram3* with the 250 addresses of data you exported previously into the relocatable file *reloc.mem*. You will also initialize 50 additional address entries with a fill pattern.

3. Import the */ram_tb/spram3/mem* instance with a relocatable memory pattern (*reloc.mem*) and a fill pattern.
 - a. Right-click in the data column of the **mem(2)** tab and select **Import** to bring up the Import Memory dialog box.
 - b. For Load Type, select **Both File and Data**.
 - c. For Address Range, select **Addresses** and enter **0** as the Start address and **300** as the End address.


This means that you will be loading the file from 0 to 300. However, the *reloc.mem* file contains only 251 addresses of data. Addresses 251 to 300 will be loaded with the fill data you specify next.

- d. For File Load, select the MTI File Format and enter **reloc.mem** in the Filename field.
- e. For Data Load, select a Fill Type of **Increment**.
- f. In the Fill Data field, set the seed value of **0** for the incrementing data.

- g. Click OK.
- h. View the data near address 250 by double-clicking on any address in the Address column and entering **250**.

You can see the specified range of addresses overwritten with the new data. Also, you can see the incrementing data beginning at address 251 ([Figure 10-12](#)).

Figure 10-12. Data Increments Starting at Address 251

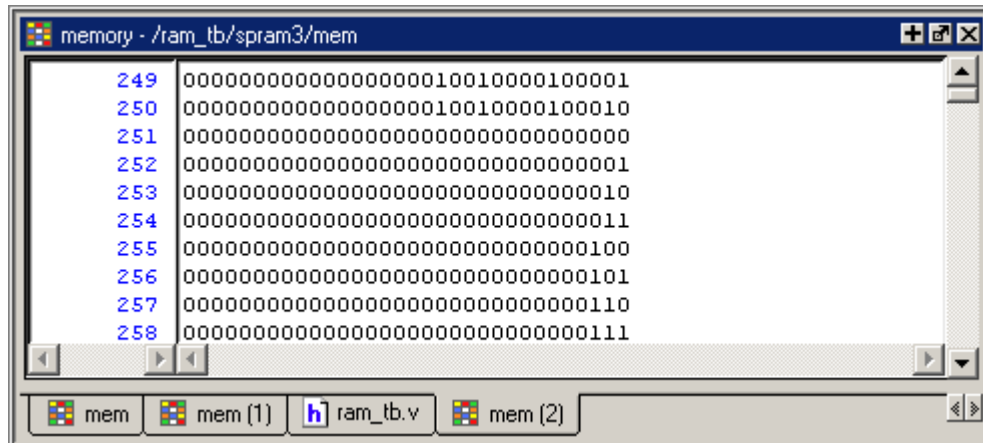

Now, before you leave this section, go ahead and clear the instances already being viewed.


- Right-click somewhere in the **mem(2)** pane and select **Close All**.

Interactive Debugging Commands

The memory panes can also be used interactively for a variety of debugging purposes. The features described in this section are useful for this purpose.


1. Open a memory instance and change its display characteristics.
 - a. Double-click instance `/ram_tb/dpram1/mem` in the Memories tab.
 - b. Right-click in the memory contents pane and select **Properties**.
 - c. Change the Address and Data Radix to **Hexadecimal**.
 - d. Select **Words per line** and enter **2**.
 - e. Click OK. The result should be as in [Figure 10-13](#).

Figure 10-13. Original Memory Content

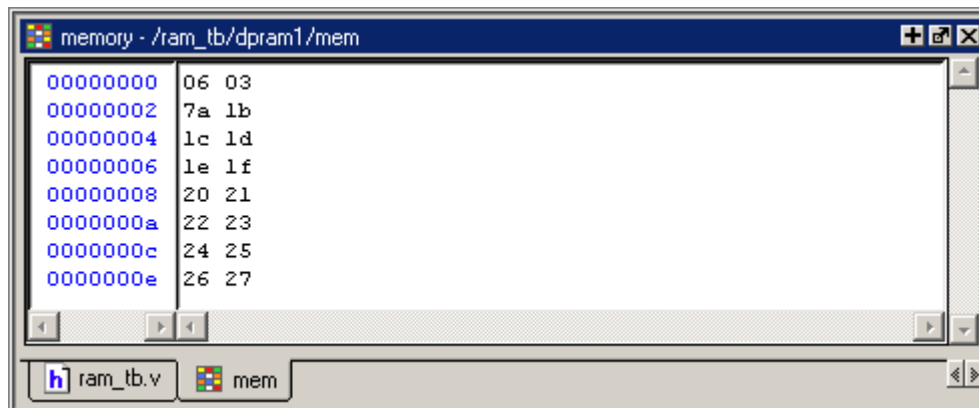

2. Initialize a range of memory addresses from a fill pattern.
 - a. Right-click in the data column of `/ram_tb/dpram1/mem` contents pane and select **Change** to open the Change Memory dialog ([Figure 10-14](#)).


Figure 10-14. Changing Memory Content for a Range of Addresses

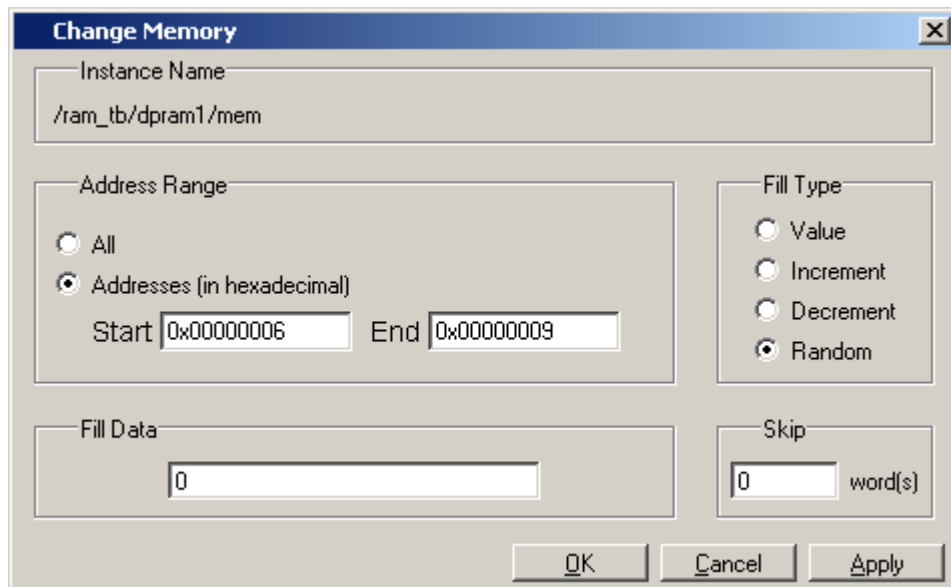

- b. Select **Addresses** and enter the start address as **0x00000006** and the end address as **0x00000009**. The "0x" hex notation is optional.
- c. Select **Random** as the **Fill Type**.
- d. Enter **0** as the **Fill Data**, setting the seed for the Random pattern.
- e. Click OK.

The data in the specified range are replaced with a generated random fill pattern (Figure 10-15).

Figure 10-15. Random Content Generated for a Range of Addresses

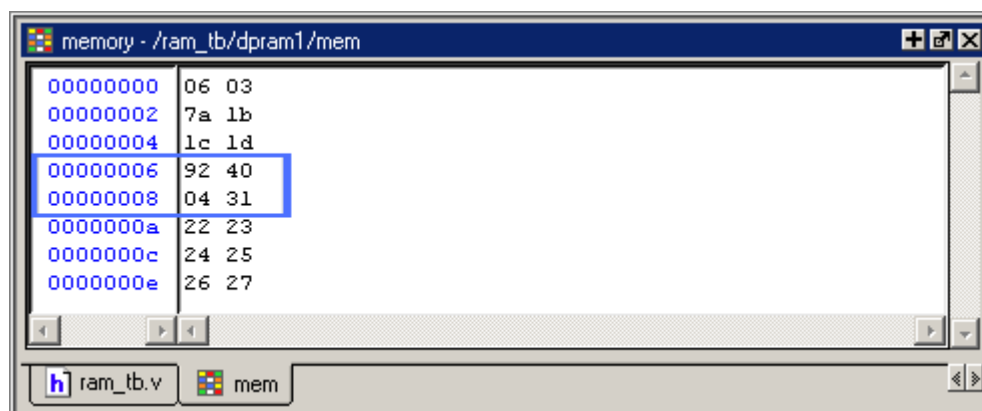


3. Change contents by highlighting.

You can also change data by highlighting them in the Address Data pane.

- a. Highlight the data for the addresses **0x0000000c:0x0000000e**, as shown in [Figure 10-16](#).


Figure 10-16. Changing Memory Contents by Highlighting

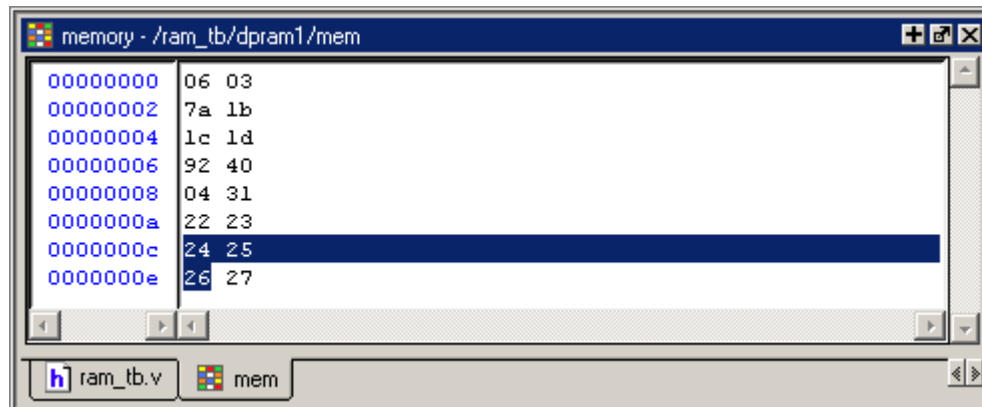

- b. Right-click the highlighted data and select **Change**.

This brings up the Change memory dialog box ([Figure 10-17](#)). Note that the Addresses field is already populated with the range you highlighted.


Figure 10-17. Entering Data to Change

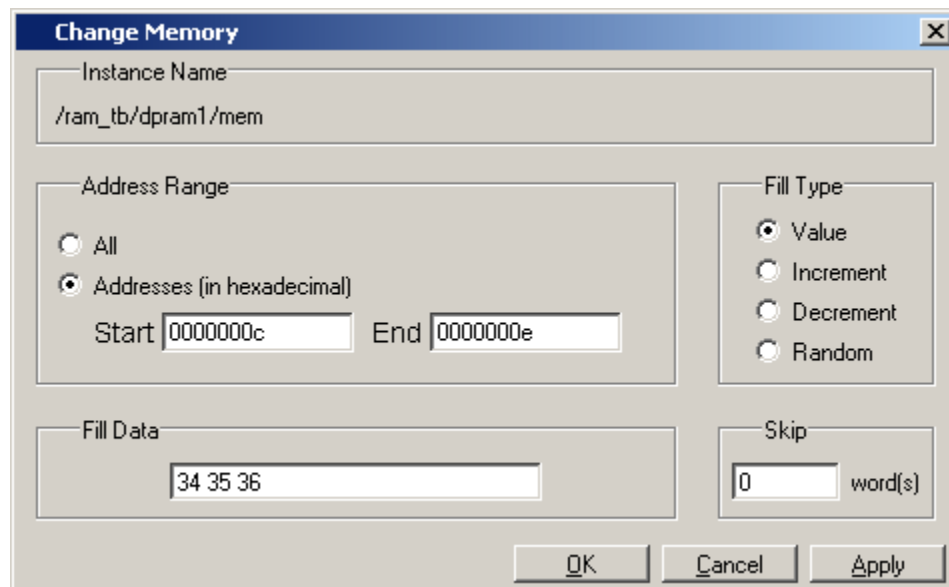

- c. Select **Value** as the Fill Type.
- d. Enter the data values into the Fill Data field as follows: **34 35 36**
- e. Click OK.

The data in the address locations change to the values you entered ([Figure 10-18](#)).

Figure 10-18. Changed Memory Contents for the Specified Addresses

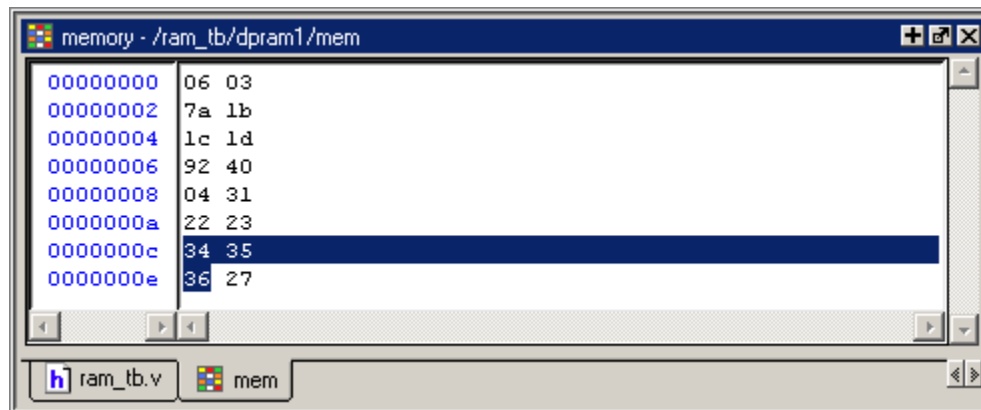

4. Edit data in place.

To edit only one value at a time, do the following:

- a. Double click any value in the Data column.
- b. Enter the desired value and press <Enter>.

If you needed to cancel the edit function, press the <Esc> key on your keyboard.

Lesson Wrap-Up

This concludes this lesson. Before continuing we need to end the current simulation.

1. Select **Simulate > End Simulation**. Click Yes.

Chapter 11

Analyzing Performance With The Profiler

Introduction

The Profiler identifies the percentage of simulation time spent in each section of your code as well as the amount of memory allocated to each function and instance. With this information, you can identify bottlenecks and reduce simulation time by optimizing your code. Users have reported up to 75% reductions in simulation time after using the Profiler.

This lesson introduces the Profiler and shows you how to use the main Profiler commands to identify performance bottlenecks.

Note



The functionality described in this tutorial requires a profile license feature in your ModelSim license file. Please contact your Mentor Graphics sales representative if you currently do not have such a feature.

Design Files for this Lesson

The example design for this lesson consists of a finite state machine which controls a behavioral memory. The testbench *test_sm* provides stimulus.

The ModelSim installation comes with Verilog and VHDL versions of this design. The files are located in the following directories:

Verilog – *<install_dir>/examples/tutorials/verilog/profiler*

VHDL – *<install_dir>/examples/tutorials/vhdl/profiler_sm_seq*

This lesson uses the Verilog version for the exercises. If you have a VHDL license, use the VHDL version instead.

Related Reading

User's Manual Chapters: [Profiling Performance and Memory Use](#) and [Tcl and Macros \(DO Files\)](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

Note



When you have completed the tutorial, remeber to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Compiling and Loading the Design

1. Create a new directory and copy the tutorial files into it.

Start by creating a new directory for this exercise (in case other users will be working with these lessons). Create the directory and copy all files from *<install_dir>/examples/tutorials/verilog/profiler* to the new directory.

If you have a VHDL license, copy the files in *<install_dir>/examples/tutorials/vhdl/profiler_sm_seq* instead.

2. Start ModelSim and change to the exercise directory.

If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.

- a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.

If the Welcome to ModelSim dialog appears, click **Close**.

- b. Select **File > Change Directory** and change to the directory you created in step 1.

3. Create the work library.

- a. Type **vlib work** at the ModelSim> prompt.

4. Compile the design files.

- a. Verilog: Type **vlog test_sm.v sm_seq.v sm.v beh_sram.v** at the ModelSim> prompt.


VHDL: Type **vcom -93 sm.vhd sm_seq.vhd sm_sram.vhd test_sm.vhd** at the ModelSim> prompt.

5. Load the top-level design unit.

- a. Type **vsim test_sm** at the ModelSim> prompt.

Running the Simulation

You will now run the simulation and view the profiling data.


1. Enable the statistical sampling profiler.
 - a. Select **Tools > Profile > Performance** or click the **Performance Profiling** icon in the toolbar. 

This must be done prior to running the simulation. ModelSim is now ready to collect performance data when the simulation is run.

2. Run the simulation.
 - a. Type **run 1 ms** at the VSIM> prompt.

Notice that the number of samples taken is displayed both in the Transcript and the Main window status bar (Figure 11-1). (Your results may not match those in the figure.) Also, ModelSim reports the percentage of samples that were taken in your design code (versus in internal simulator code).


Figure 11-1. Sampling Reported in the Transcript

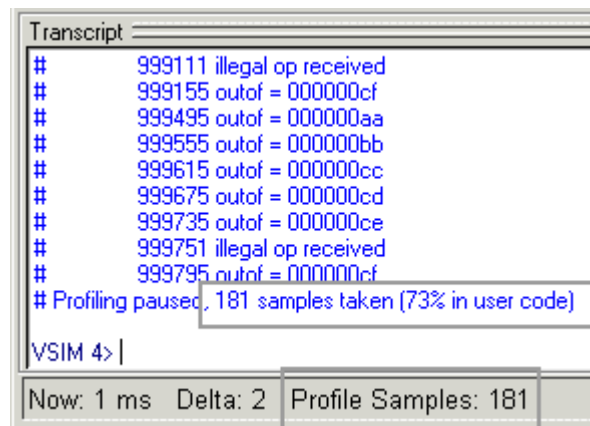

3. Display the statistical performance data in the Profile pane.
 - a. Select **View > Profile**.

The Profile pane (you may need to increase its size) displays three tab-selectable views of the data—Ranked, Call Tree, and Structural (Figure 11-2). (Your results may not match those in the figure.)

Figure 11-2. The Profile Window

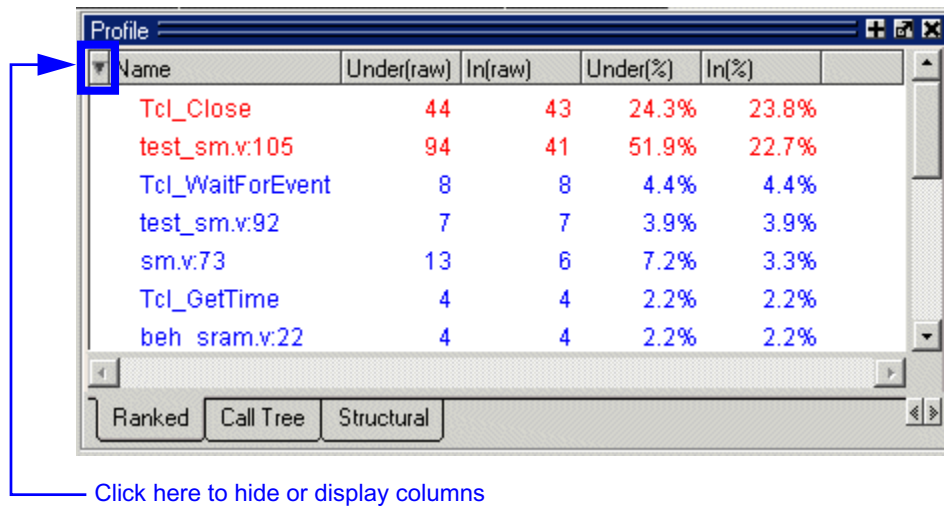

The table below gives a description of the columns in each tab. For more details on each pane, refer to the section [Profile Panes](#) in the User's Manual.

Table 11-1. Columns in the Profile Window

Column	Description
Under(raw)	the raw number of Profiler samples collected during the execution of a function, including all support routines under that function; or, the number of samples collected for an instance, including all instances beneath it in the structural hierarchy
In(raw)	the raw number of Profiler samples collected during a function or instance
Under(%)	the ratio (as a percentage) of the samples collected during the execution of a function and all support routines under that function to the total number of samples collected; or, the ratio of the samples collected during an instance, including all instances beneath it in the structural hierarchy, to the total number of samples collected
In(%)	the ratio (as a percentage) of the total samples collected during a function or instance
%Parent (not in the Ranked view)	the ratio (as a percentage) of the samples collected during the execution of a function or instance to the samples collected in the parent function or instance

Data in the Ranked view is sorted by default from highest to lowest percentage in the In(%) column. In the Call Tree and Structural views, data is sorted (by default)

according to the Under(%) column. You can click the heading of any column to sort data by that column.

The "Tcl_*" entries are functions that are part of the internal simulation code. They are not directly related to your HDL code.

- b. Click the **Call Tree** tab to view the profile data in a hierarchical, function-call tree display.

The results differ between the Verilog and VHDL versions of the design. In Verilog, line 105 (*test_sm.v:105*) is taking the majority of simulation time. In VHDL, *test_sm.vhd:203* and *sm.vhd:93* are taking the majority of the time.

Note




Your results may look slightly different as a result of the computer you're using and different system calls that occur during the simulation. Also, the line number reported may be one or two lines off the actual source file. This happens due to how the stacktrace is decoded on different platforms.

- c. **Verilog:** Right-click *test_sm.v:105* and select **Expand All** from popup menu. This expands the hierarchy of *test_sm.v:105* and displays the functions that call it (Figure 11-3).

VHDL: Right-click *test_sm.vhd:203* and select **Expand All** from popup menu. This expands the hierarchy of *test_sm.vhd:203* and displays the functions that call it.


Figure 11-3. Expand the Hierarchical Function Call Tree

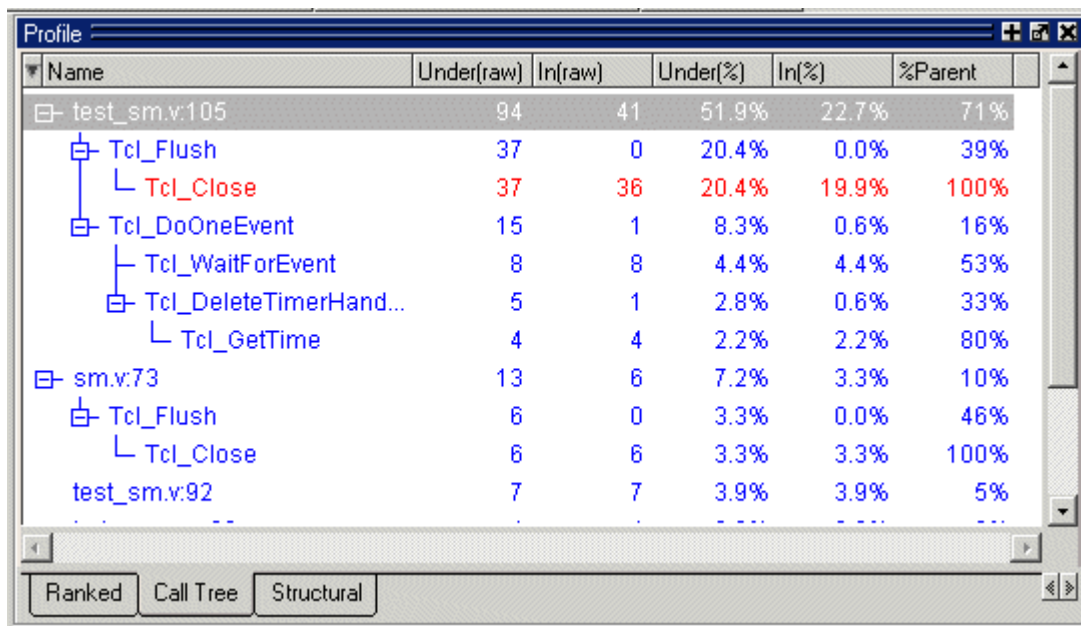

4. View the source code of a line that is using a lot of simulation time.

- a. **Verilog:** Double-click *test_sm.v:105*. The Source window opens in the MDI frame with line 105 displayed (Figure 11-4).
- VHDL:** Double-click *test_sm.vhd:203*. The Source window opens in the MDI frame with line 203 displayed.

Figure 11-4. The Source Window Showing a Line from the Profile Data

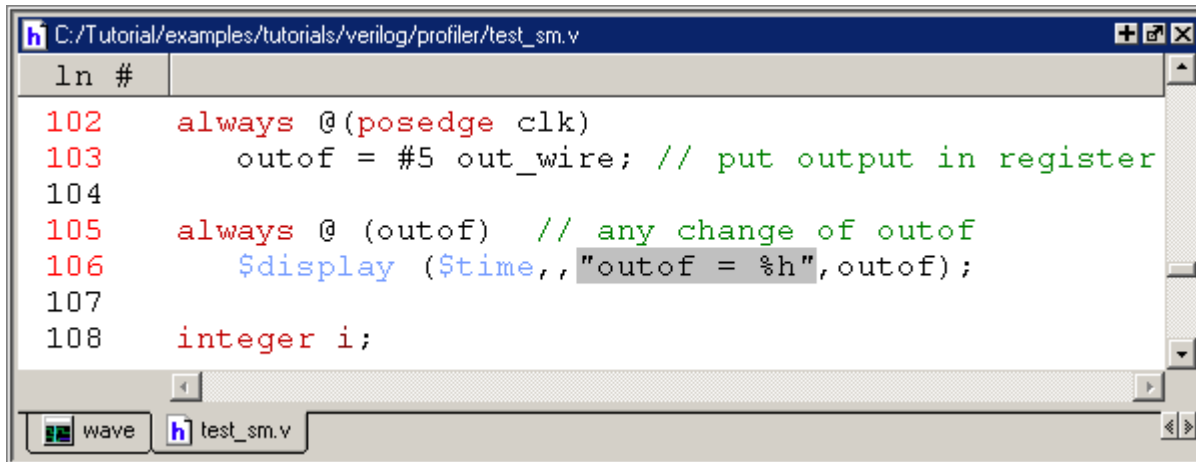

View Profile Details

The Profile Details pane increases visibility into simulation performance. Right-clicking any function in the Ranked or Call Tree views opens a popup menu that includes a **Function Usage** selection. When you select **Function Usage**, the Profile Details pane opens and displays all instances that use the selected function.

1. View the Profile Details of a function in the Call Tree view.
 - a. Right-click the *Tcl_Close* function and select **Function Usage** from the popup menu.

The Profile Details pane displays all instances using function *Tcl_Close* (Figure 11-5). The statistical performance data show how much simulation time is used by *Tcl_Close* in each instance.

Figure 11-5. Profile Details of the Function *Tcl_Close*

Profile Details					
Instances using function: Tcl_Close					
Name	Under(raw)	In(raw)	Under(%)	In(%)	
/test_sm	37	36	20.4%	19.9%	
/test_sm/sm_seq0/sm_0	7	7	3.9%	3.9%	

When you right-click a selected function or instance in the Structural pane, the popup menu displays either a Function Usage selection or an Instance Usage selection, depending on the object selected.

2. View the Profile Details of an instance in the Structural view.
 - a. Select the **Structural** tab to change to the Structural view.
 - b. Right-click *test_sm* and select **Expand All** from the popup menu.
 - c. **Verilog:** Right-click the *sm_0* instance and select **Instance Usage** from the popup menu. The Profile Details shows all instances with the same definition as */test_sm/sm_seq0/sm_0* (Figure 11-6).

Figure 11-6. Profile Details of Function *sm_0*

Instances with same definition as /test_sm/sm_seq0/sm_0				
Name	Under(raw)	In(raw)	Under(%)	In(%)
/test_sm/sm_seq0/sm_0	15	15	8.3%	8.3%

VHDL: Right-click the *dut* instance and select **Instance Usage** from the popup menu. The Profile Details shows all instances with the same definition as */test_sm/dut*.

Filtering and Saving the Data

As a last step, you will filter out lines that take less than 2% of the simulation time using the Profiler toolbar, and then save the report data to a text file.

1. Filter lines that take less than 2% of the simulation time.
 - a. Click the Call Tree tab of the Profile pane.
 - b. Right-click somewhere in the pane and select **Collapse All**.
 - c. Change the **Under(%)** field to 2 (Figure 11-7).

Figure 11-7. The Profiler Toolbar




If you do not see these toolbar buttons, right-click in a blank area of the toolbar and select Profile.

- d. Click the **Refresh Profile Data** button.



ModelSim filters the list to show only those lines that take 2% or more of the simulation time (Figure 11-8).

Figure 11-8. The Filtered Profile Data

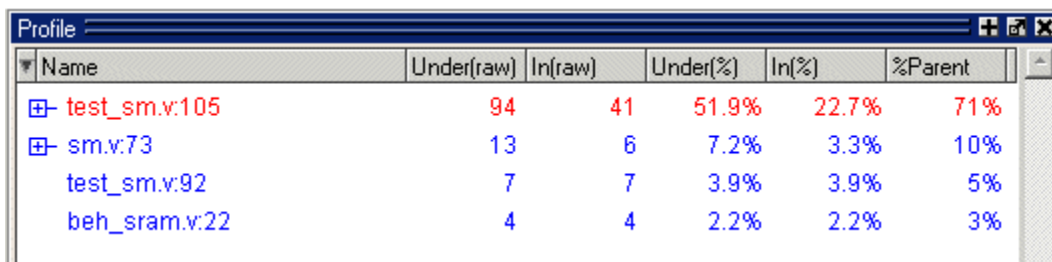

Name	Under(raw)	In(raw)	Under(%)	In(%)	%Parent
test_sm.v:105	94	41	51.9%	22.7%	71%
sm.v:73	13	6	7.2%	3.3%	10%
test_sm.v:92	7	7	3.9%	3.9%	5%
beh_sram.v:22	4	4	2.2%	2.2%	3%


2. Save the report.

a. Click the save icon in the Profiler toolbar.



b. In the Profile Report dialog (Figure 11-9), select the **Call Tree** Type.

Figure 11-9. The Profile Report Dialog

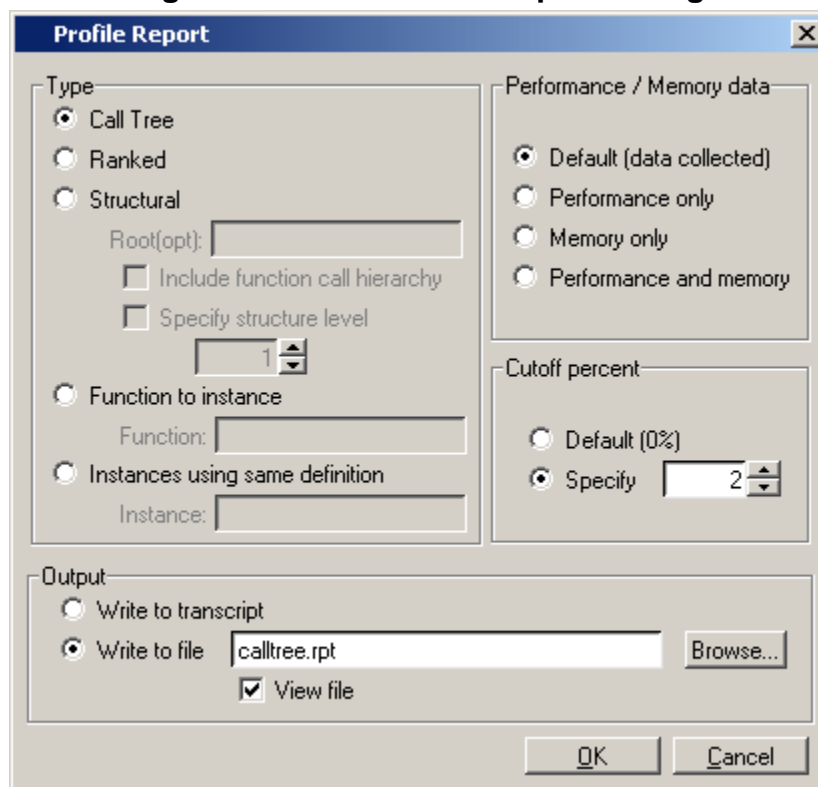

Profile Report

Type

- ☒ Call Tree
- ☐ Ranked
- ☐ Structural

Root(opt):

☐ Include function call hierarchy

☐ Specify structure level

☐ Function to instance

Function:

☐ Instances using same definition

Instance:

Performance / Memory data

- ☒ Default (data collected)
- ☐ Performance only
- ☐ Memory only
- ☐ Performance and memory

Cutoff percent

- ☐ Default (0%)
- ☒ Specify

Output

- ☐ Write to transcript
- ☒ Write to file

☒ View file

c. In the Performance/Memory data section select **Default (data collected)**.

d. Specify the Cutoff percent as 2%.


e. Select **Write to file** and type **calltree.rpt** in the file **name** field.

f. **View file** is selected by default when you select **Write to file**. Leave it selected.

g. Click **OK**.

The *calltree.rpt* report file will open automatically in Notepad (Figure 11-10).

Figure 11-10. The *calltree.rpt* Report

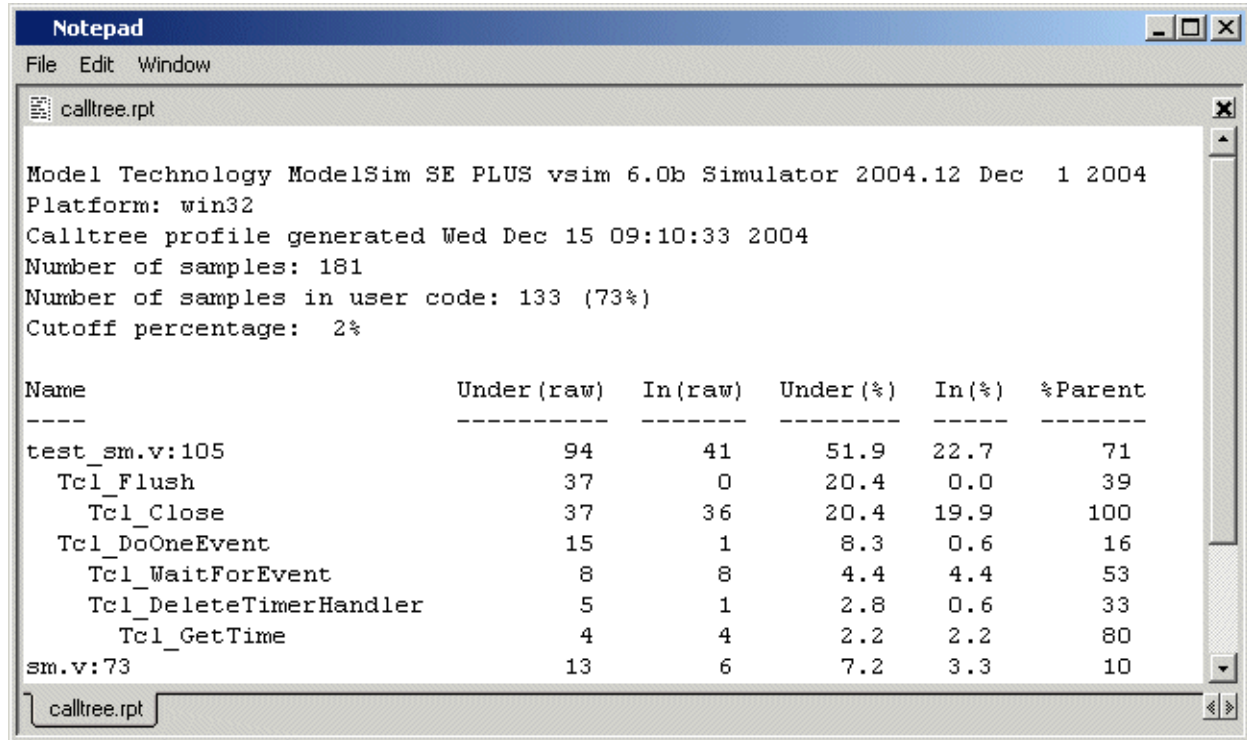

Model Technology ModelSim SE PLUS vsim 6.0b Simulator 2004.12 Dec 1 2004
Platform: win32
Calltree profile generated Wed Dec 15 09:10:33 2004
Number of samples: 181
Number of samples in user code: 133 (73%)
Cutoff percentage: 2%

Name	Under (raw)	In (raw)	Under (%)	In (%)	%Parent
test_sm.v:105	94	41	51.9	22.7	71
Tcl_Flush	37	0	20.4	0.0	39
Tcl_Close	37	36	20.4	19.9	100
Tcl_DoOneEvent	15	1	8.3	0.6	16
Tcl_WaitForEvent	8	8	4.4	4.4	53
Tcl_DeleteTimerHandler	5	1	2.8	0.6	33
Tcl_GetTime	4	4	2.2	2.2	80
sm.v:73	13	6	7.2	3.3	10

You can also output this report from the command line using the **profile report** command. See the *ModelSim Command Reference* for details.

Lesson Wrap-Up

This concludes this lesson. Before continuing we need to end the current simulation.

Select **Simulate > End Simulation**. Click Yes.

Chapter 12

Simulating With Code Coverage

Introduction

ModelSim Code Coverage gives you graphical and report file feedback on which executable statements, branches, conditions, and expressions in your source code have been executed. It also measures bits of logic that have been toggled during execution.

Note



The functionality described in this lesson requires a coverage license feature in your ModelSim license file. Please contact your Mentor Graphics sales representative if you currently do not have such a feature.

Design Files for this Lesson

The sample design for this lesson consists of a finite state machine which controls a behavioral memory. The testbench *test_sm* provides stimulus.

The ModelSim installation comes with Verilog and VHDL versions of this design. The files are located in the following directories:

Verilog – *<install_dir>/examples/tutorials/verilog/coverage*

VHDL – *<install_dir>/examples/tutorials/vhdl/coverage*

This lesson uses the Verilog version in the examples. If you have a VHDL license, use the VHDL version instead. When necessary, we distinguish between the Verilog and VHDL versions of the design.

Related Reading

User's Manual Chapter: [Coverage](#).

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

Note



When you have completed the tutorial, remeber to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Compiling the Design

Enabling Code Coverage is a two step process. First, you compile the files and identify which coverage statistics you want. Second, you load the design and tell ModelSim to produce those statistics.

1. Create a new directory and copy the tutorial files into it.

Start by creating a new directory for this exercise (in case other users will be working with these lessons). Create the directory and copy all files from *<install_dir>/modeltech/examples/tutorials/verilog/coverage* to the new directory.

If you have a VHDL license, copy the files in *<install_dir>/modeltech/examples/tutorials/vhdl/coverage* instead.

2. Start ModelSim and change to the exercise directory.

If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.

- a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.

If the Welcome to ModelSim dialog appears, click **Close**.

- b. Select **File > Change Directory** and change to the directory you created in step 1.

3. Create the working library.

- a. Type **vlib work** at the ModelSim> prompt.

4. Compile the design files.

- a. For Verilog – Type **vlog -cover bcsxf sm.v sm_seq.v beh_sram.v test_sm.v** at the ModelSim> prompt.

For VHDL – Type **vcom -cover bcsxf sm.vhd sm_seq.vhd sm_sram.vhd test_sm.vhd** at the ModelSim> prompt.


The **-cover bcsxf** argument instructs ModelSim to collect branch, condition, statement, extended toggle, and finite state machine coverage statistics. Refer to the section [Enabling Code Coverage](#) in the User's Manual for more information on the available coverage types.

Loading and Running the Design

1. Load the design.
 - a. Type **vsim -coverage test_sm** at the ModelSim> prompt.
2. Run the simulation
 - a. Type **run 1 ms** at the VSIM> prompt.

When you load a design with Code Coverage enabled, ModelSim adds several columns to the Files and sim tabs in the Workspace ([Figure 12-1](#)). Your results may not match those shown in the figure.

Figure 12-1. Code Coverage Columns in the Main Window Workspace

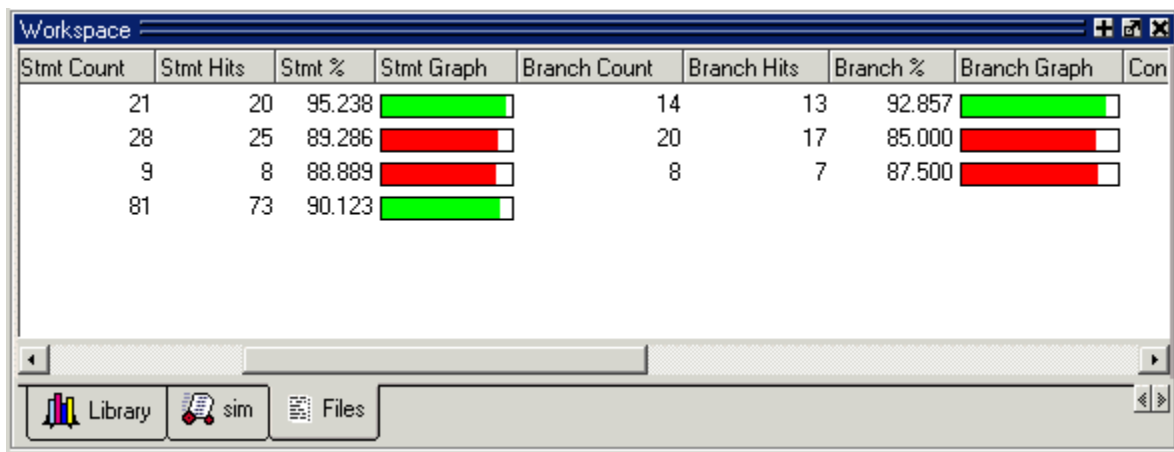


Stmt Count	Stmt Hits	Stmt %	Stmt Graph	Branch Count	Branch Hits	Branch %	Branch Graph	Con
21	20	95.238	<div style="width: 95.238%;"></div>	14	13	92.857	<div style="width: 92.857%;"></div>	
28	25	89.286	<div style="width: 89.286%;"></div>	20	17	85.000	<div style="width: 85.000%;"></div>	
9	8	88.889	<div style="width: 88.889%;"></div>	8	7	87.500	<div style="width: 87.500%;"></div>	
81	73	90.123	<div style="width: 90.123%;"></div>					

By default, ModelSim also displays three Code Coverage panes in the Main window:

- **Missed Coverage**

Displays the selected file's un-executed statements, branches, conditions, expressions and signals that have not toggled ([Figure 12-2](#)).

Figure 12-2. Missed Coverage Pane

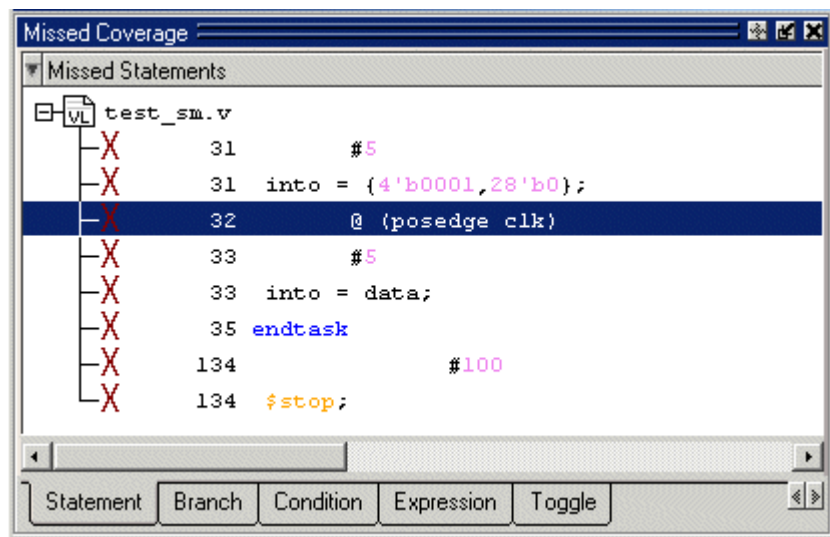

- **Instance Coverage**

Displays statement, branch, condition, expression and toggle coverage statistics for each instance in a flat, non-hierarchical view (Figure 12-3).


Figure 12-3. Instance Coverage Pane

Instance Coverage								
	Stmt %	Stmt graph	Branch count	Branch hits	Branch misses	Branch %	Branch graph	Con
1	90%	<div><div></div></div>	8	7	1	87.5%	<div><div></div></div>	
3	90%	<div><div></div></div>	20	17	3	85%	<div><div></div></div>	
1	95.5%	<div><div></div></div>	14	13	1	92.9%	<div><div></div></div>	
13	84.3%	<div><div></div></div>						

- **Details**

Shows coverage details for the item selected in the Missed Coverage pane. Details can include truth tables for conditions and expressions, or toggle details (Figure 12-4).

Figure 12-4. Details Pane

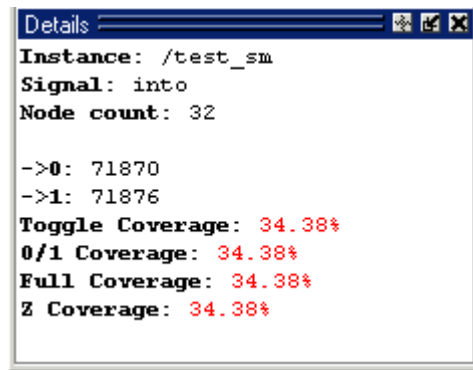


Another coverage-related pane is the Current Exclusions pane. Select **View > Code Coverage > Current Exclusions** to display that pane.

- **Current Exclusions**

Lists all files and lines that are excluded from coverage statistics ([Figure 12-5](#)). See [Excluding Lines and Files from Coverage Statistics](#) for more information.

Figure 12-5. Current Exclusions Pane

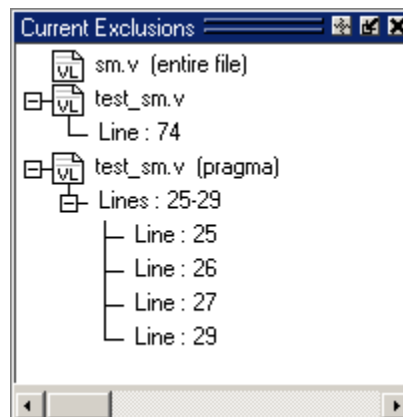

All coverage panes can be re-sized, rearranged, and undocked to make the data more easily viewable. To resize a pane, click-and-drag on the top or bottom border. To move a pane, click-and-drag on the double-line to the right of the pane name. To undock a pane you can select it then drag it out of the Main window, or you can click the Dock/Undock Pane button in the header bar (top right). To redock the pane, click the Dock/Undock Pane button again.


We will look at these panes more closely in the next exercise. For complete details on each pane, Refer to the section [Code Coverage Panes](#) in the User's Manual.

Coverage Statistics in the Main window

Let's take a look at the data in these various panes.

1. View statistics in the Workspace pane.
 - a. Select the sim tab in the Workspace and scroll to the right.
 Coverage statistics are shown for each object in the design.
 - b. Select the Files tab in the Workspace and scroll to the right.
 Each file in the design shows summary statistics for statements, branches, conditions, and expressions.
 - c. Click the right-mouse button on any column name and select an object from the list (Figure 12-6).

Figure 12-6. Right-click a Column Heading to Hide or Show Columns

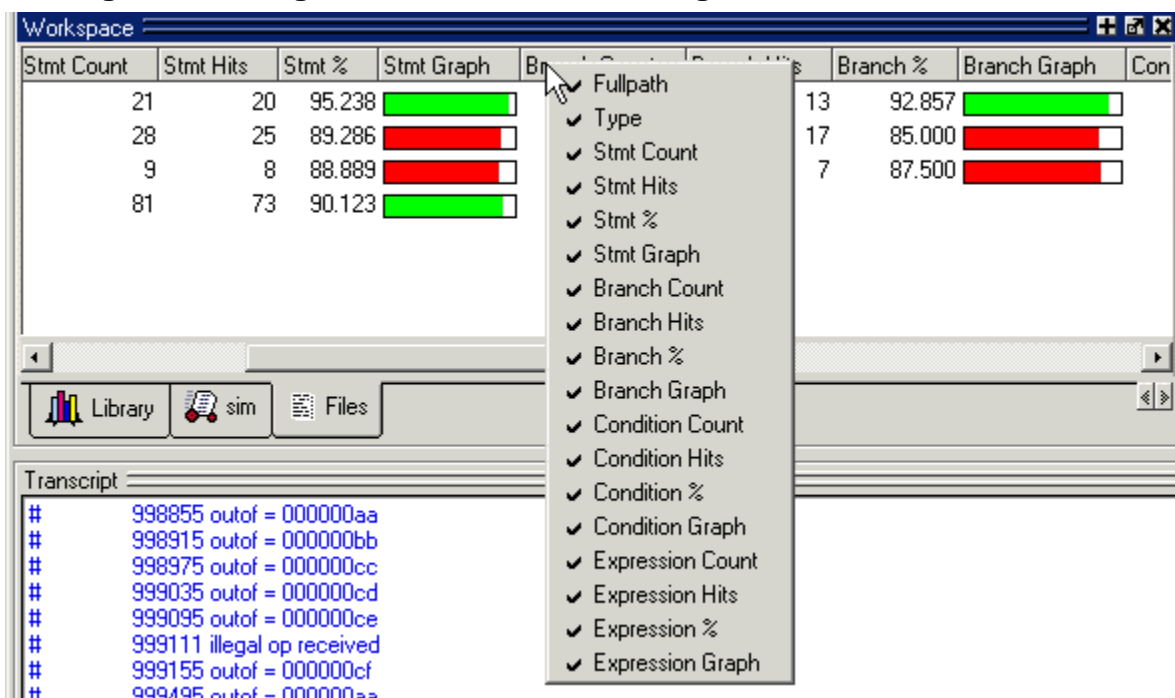

All columns checked are displayed. Unchecked columns are hidden. The displayed or hidden status of every column is persistent between invocations of ModelSim.

2. View statistics in the Missed Coverage pane (see Figure 12-2 above).
 - a. Select different files from the Files tab of the Workspace. The Missed Coverage pane updates to show statistics for the selected file.
 - b. Select any entry in the Statement tab to display that line in the Source window.
3. View statistics in the Details pane.
 - a. Select the Toggle tab in the Missed Coverage pane.

If the Toggle tab isn't visible, you can do one of two things: 1) widen the pane by clicking-and-dragging on the pane border; 2) if your mouse has a middle button, click-and-drag the tabs with the middle mouse button.

- b. Select any object in the Toggle tab to see details in the Details pane (see [Figure 12-4](#) above).
4. View instance coverage statistics.

The Instance Coverage pane displays coverage statistics for each instance in a flat, non-hierarchical view (see [Figure 12-3](#) above). Select any instance in the Instance Coverage pane to see its source code displayed in the Source window.


Coverage Statistics in the Source Window

In the previous section you saw that the Source window and the Main window coverage panes are linked. You can select objects in the Main window panes to view the underlying source code in the Source window. Furthermore, the Source window contains statistics of its own.

1. View coverage statistics for *test_sm* in the Source window.
 - a. Make sure *test_sm* is selected in the sim tab of the Workspace.


In the Statement tab of the Missed Coverage pane, expand *test_sm.v* if necessary and select any line (Figure 12-7).

Figure 12-7. Selecting a Line in the Missed Coverage Pane

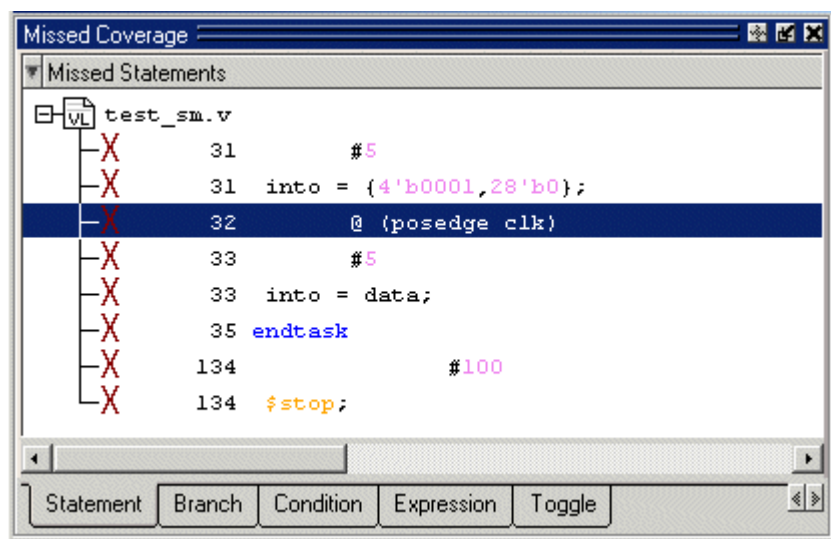

- b. The Source window opens in the MDI frame with the line you selected highlighted (Figure 12-8).

Figure 12-8. Coverage Statistics in the Source Window

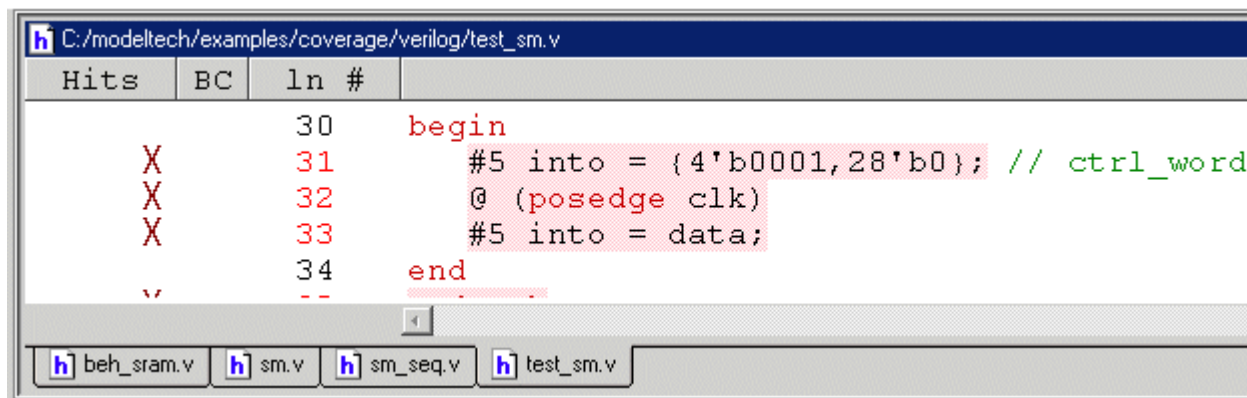

- c. Switch to the Source window.

The table below describes the various icons.


Table 12-1. Coverage Icons in the Source Window

Icon	Description
green checkmark	indicates a statement that has been executed
red X	indicates that a statement in that line has not been executed (zero hits)
green E	indicates a line that has been excluded from code coverage statistics
red X _T or X _F	indicates that a true or false branch (respectively) of a conditional statement has not been executed

- d. Hover your mouse pointer over a line of executable code with a green checkmark in the Hits or BC columns.

The icons change to numbers that indicate how many times the statements and branches in that line were executed ([Figure 12-9](#)).

Figure 12-9. Coverage Numbers Shown by Hovering the Mouse Pointer

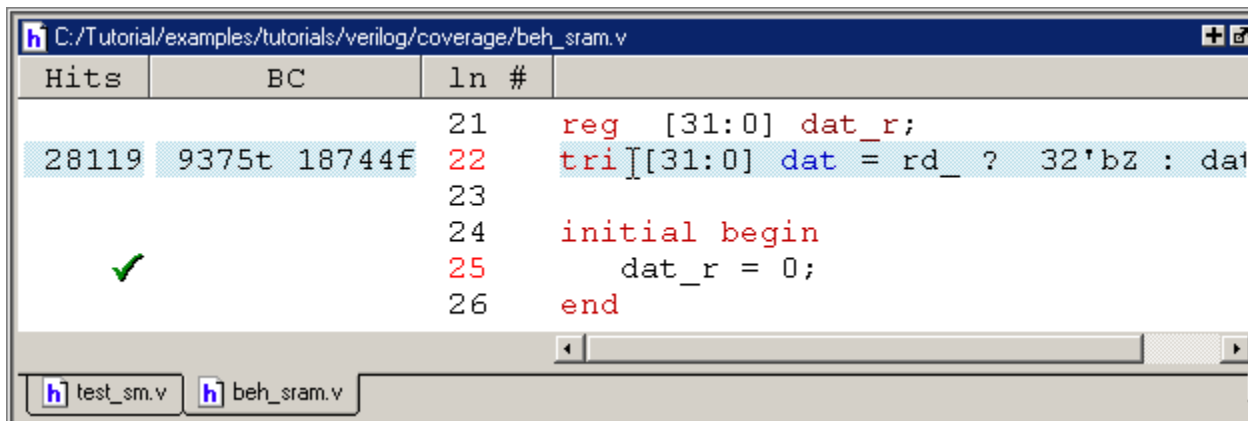

In this case, the statement in line 22 was executed 28,119 times, the true branch of the condition in this line executed 9,375 times, and the false branch executed 18,744 times.

- e. Select **Tools > Code Coverage > Show coverage numbers**.

The icons are replaced by execution counts on every line. An ellipsis (...) is displayed whenever there are multiple statements on the line. Hover the mouse pointer over a statement to see the count for that statement.


- f. Select **Tools > Code Coverage > Show coverage numbers** again to uncheck the selection and return to icon display.

Toggle Statistics in the Objects Pane

Toggle coverage counts each time a logic node transitions from one state to another. Earlier in the lesson you enabled two-state toggle coverage (0 → 1 and 1 → 0) with the **-cover t** argument. Alternatively, you can enable six-state toggle coverage using the **-cover x** argument. Refer to the section [Toggle Coverage](#) in the User's Manual for more information.

1. View toggle data in the Objects pane of the Main window.
 - a. Select *test_sm* in the sim tab of the Main window.
 - b. If the Objects pane isn't open already, select **View > Objects**. Scroll to the right to see the various toggle coverage columns, or undock and expand the pane until all columns show ([Figure 12-10](#)).

Figure 12-10. Toggle Coverage in the Objects Pane

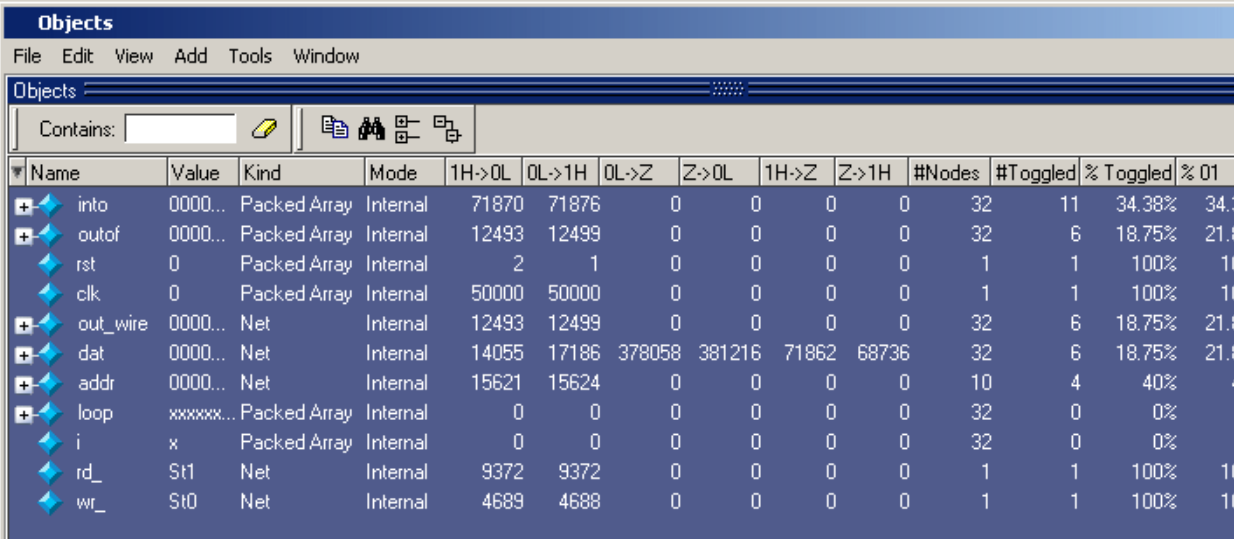

The screenshot shows the 'Objects' pane with a menu bar (File, Edit, View, Add, Tools, Window) and a toolbar. Below the toolbar is a table displaying toggle coverage data for various logic nodes. The table has columns for Name, Value, Kind, Mode, and six toggle coverage columns (1H→0L, 0L→1H, 0L→Z, Z→0L, 1H→Z, Z→1H), followed by summary columns (#Nodes, #Toggled, % Toggled, % 01).


Name	Value	Kind	Mode	1H→0L	0L→1H	0L→Z	Z→0L	1H→Z	Z→1H	#Nodes	#Toggled	% Toggled	% 01
into	0000...	Packed Array	Internal	71870	71876	0	0	0	0	32	11	34.38%	34.3
outof	0000...	Packed Array	Internal	12493	12499	0	0	0	0	32	6	18.75%	21.8
rst	0	Packed Array	Internal	2	1	0	0	0	0	1	1	100%	10
clk	0	Packed Array	Internal	50000	50000	0	0	0	0	1	1	100%	10
out_wire	0000...	Net	Internal	12493	12499	0	0	0	0	32	6	18.75%	21.8
dat	0000...	Net	Internal	14055	17186	378058	381216	71862	68736	32	6	18.75%	21.8
addr	0000...	Net	Internal	15621	15624	0	0	0	0	10	4	40%	4
loop	xxxxxx...	Packed Array	Internal	0	0	0	0	0	0	32	0	0%	
i	x	Packed Array	Internal	0	0	0	0	0	0	32	0	0%	
rd_	St1	Net	Internal	9372	9372	0	0	0	0	1	1	100%	10
wr_	St0	Net	Internal	4689	4688	0	0	0	0	1	1	100%	10

Excluding Lines and Files from Coverage Statistics

ModelSim allows you to exclude lines and files from code coverage statistics. You can set exclusions with the GUI, with a text file called an "exclusion filter file", or with "pragmas" in your source code. Pragmas are statements that instruct ModelSim to not collect statistics for the bracketed code. Refer to the section [Excluding Objects from Coverage](#) in the User's Manual for more details on exclusion filter files and pragmas.

1. Display the Current Exclusions pane if necessary.
 - a. Select **View > Code Coverage > Current Exclusions**.
2. Exclude a line via the Missed Coverage pane.
 - a. Right click a line in the Missed Coverage pane and select **Exclude Selection**. (You can also exclude the selection for the current instance only by selecting Exclude Selection For Instance <inst_name>.) The line will appear in the Current Exclusions pane.
3. Exclude an entire file.
 - a. In the Files tab of the Workspace, locate *sm.v* (or *sm.vhd* if you are using the VHDL example).
 - b. Right-click the file name and select **Code Coverage > Exclude Selected File** ([Figure 12-11](#)).

Figure 12-11. Excluding a File Using Menus in the Workspace

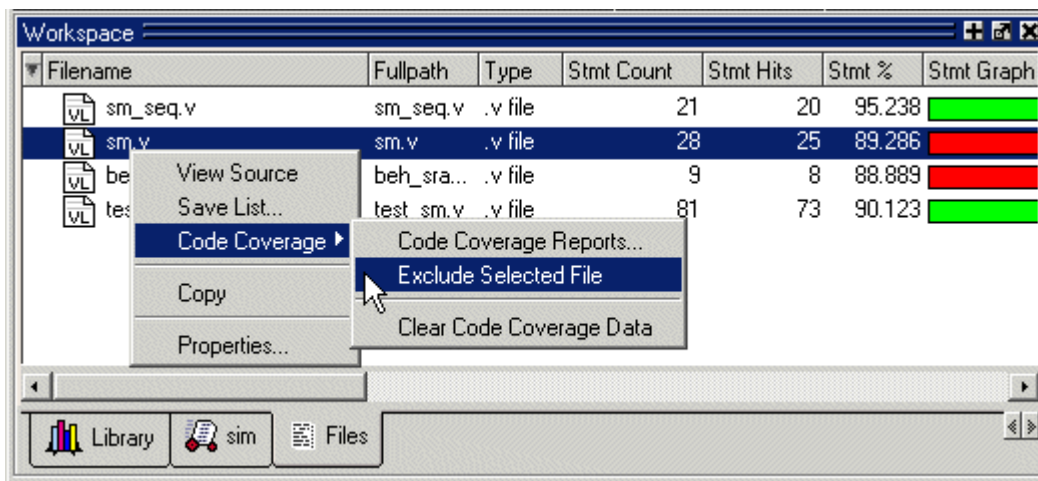

The file is added to the Current Exclusions pane.

4. Cancel the exclusion of *sm.v*.

- a. Right-click *sm.v* in the Current Exclusions pane and select **Cancel Selected Exclusions**.

Creating Code Coverage Reports


You can create reports on the coverage statistics using either the menus or by entering commands in the Transcript pane. The reports are output to a text file regardless of which method you use.

To create coverage reports via the menus, do one of the following:

- select **Tools > Code Coverage > Reports** from the Main window menu
 - right-click any object in the sim or Files tab of the Workspace and select **Code Coverage > Code Coverage Reports**
 - right-click any object in the Instance Coverage pane and select **Code coverage reports** from the context menu
1. Create a report on all instances.
 - a. Select **Tools > Code Coverage > Reports** from the Main window toolbar.

This opens the Coverage Report dialog ([Figure 12-12](#)).

Figure 12-12. Coverage Report Dialog

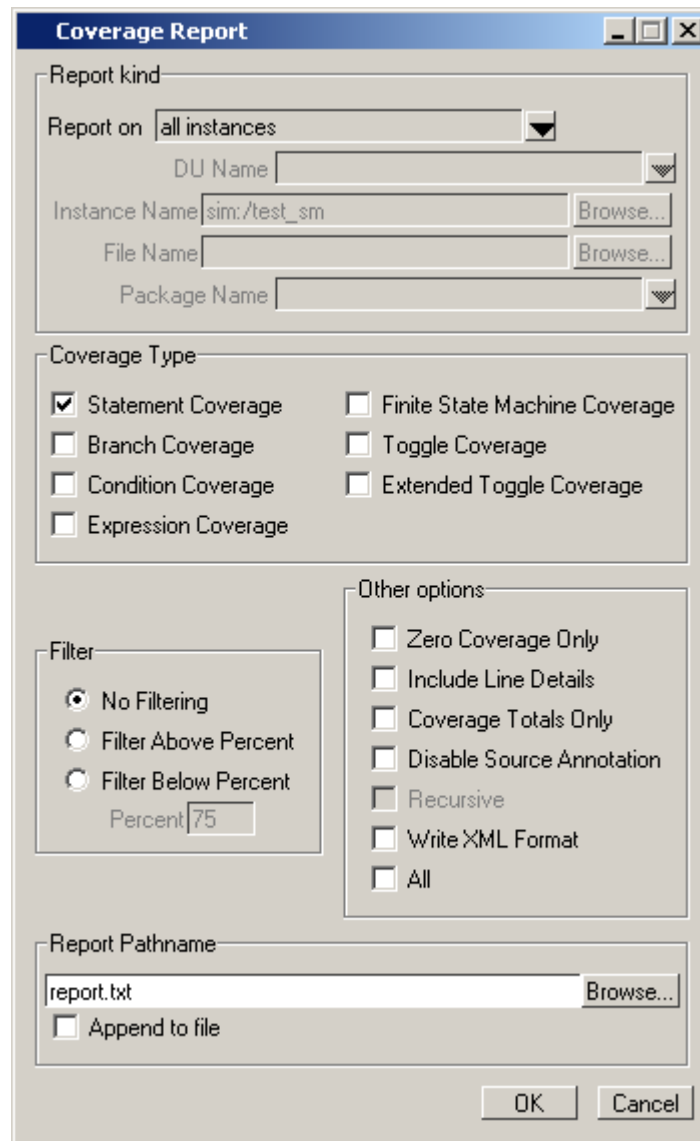

- b. Make sure **Report on all instances** and **No Filtering** are selected and then click OK.
ModelSim creates a file *report.txt* in the current directory and displays the report in Notepad.
- c. Close Notepad when you have finished viewing the report.
2. Create a summary report on all design files from the Transcript pane.
 - a. Type **coverage report -file cover.txt** at the VSIM> prompt.
 - b. Type **notepad cover.txt** at the VSIM> prompt to view the report.
 - c. Close Notepad when you have finished viewing the report.

Lesson Wrap-Up

This concludes this lesson. Before continuing we need to end the current simulation.

1. Type **quit -sim** at the VSIM> prompt.

Chapter 13

Comparing Waveforms

Introduction

Waveform Compare computes timing differences between test signals and reference signals. The general procedure for comparing waveforms has four main steps:

1. Select the simulations or datasets to compare
2. Specify the signals or regions to compare
3. Run the comparison
4. View the comparison results

In this exercise you will run and save a simulation, edit one of the source files, run the simulation again, and finally compare the two runs.

Note



The functionality described in this tutorial requires a compare license feature in your ModelSim license file. Please contact your Mentor Graphics sales representative if you currently do not have such a feature.

Design Files for this Lesson

The sample design for this lesson consists of a finite state machine which controls a behavioral memory. The testbench *test_sm* provides stimulus.

The ModelSim installation comes with Verilog and VHDL versions of this design. The files are located in the following directories:

Verilog – *<install_dir>/examples/tutorials/verilog/compare*

VHDL – *<install_dir>/examples/tutorials/vhdl/compare*

This lesson uses the Verilog version in the examples. If you have a VHDL license, use the VHDL version instead. When necessary, we distinguish between the Verilog and VHDL versions of the design.

Related Reading

User's Manual sections: [Waveform Compare](#) and [WLF Files \(Datasets\) and Virtuals](#).

Creating the Reference Dataset

The reference dataset is the *.wlf* file that the test dataset will be compared against. It can be a saved dataset, the current simulation dataset, or any part of the current simulation dataset.

In this exercise you will use a DO file to create the reference dataset.

1. Create a new directory and copy the tutorial files into it.

Start by creating a new directory for this exercise (in case other users will be working with these lessons). Create the directory and copy all files from `<install_dir>/modeltech/examples/tutorials/verilog/compare` to the new directory.

If you have a VHDL license, copy the files in `<install_dir>/modeltech/examples/tutorials/vhdl/compare` instead.

2. Start ModelSim and change to the exercise directory.

If you just finished the previous lesson, ModelSim should already be running. If not, start ModelSim.

- a. Type **vsim** at a UNIX shell prompt or use the ModelSim icon in Windows.

If the Welcome to ModelSim dialog appears, click **Close**.

- b. Select **File > Change Directory** and change to the directory you created in step 1.

3. Execute the lesson DO file.

- a. Type **do gold_sim.do** at the ModelSim> prompt.

The DO file does the following:

- Creates and maps the work library
- Compiles the Verilog and VHDL files
- Loads the simulator with optimizations turned off (**vsim -novopt**)
- Runs the simulation and saves the results to a dataset named *gold.wlf*
- Quits the simulation

Feel free to open the DO file and look at its contents.

Creating the Test Dataset

The test dataset is the *.wlf* file that will be compared against the reference dataset. Like the reference dataset, the test dataset can be a saved dataset, the current simulation dataset, or any part of the current simulation dataset.

To simplify matters, you will create the test dataset from the simulation you just ran. However, you will edit the testbench to create differences between the two runs.

Verilog

1. Edit the testbench.
 - a. Select **File > Open** and open *test_sm.v*.
 - b. Scroll to line 122, which looks like this:


```
@ (posedge clk) wt_wd('h10,'haa);
```
 - c. Change the data pattern 'aa' to 'ab':


```
@ (posedge clk) wt_wd('h10,'hab);
```
 - d. Select **File > Save** to save the file.
2. Compile the revised file and rerun the simulation.
 - a. Type **do sec_sim.do** at the ModelSim> prompt.
 The DO file does the following:
 - Re-compile the testbench
 - Adds waves to the Wave window
 - Loads the simulator with optimizations turned off (**vsim -novopt**)
 - Runs the simulation

VHDL

1. Edit the testbench.
 - a. Select **File > Open** and open *test_sm.vhd*.
 - b. Scroll to line 151, which looks like this:


```
wt_wd ( 16#10#, 16#aa#, clk, into );
```
 - c. Change the data pattern 'aa' to 'ab':


```
wt_wd ( 16#10#, 16#ab#, clk, into );
```
 - d. Select **File > Save** to save the file.
2. Compile the revised file and rerun the simulation.
 - a. Type **do sec_sim.do** at the ModelSim> prompt.
 The DO file does the following:


- Re-compiles the testbench
- Adds waves to the Wave window
- Loads the simulator with optimizations turned off (**vsim -novopt**)
- Runs the simulation

Comparing the Simulation Runs

ModelSim includes a Comparison Wizard that walks you through the process. You can also configure the comparison manually with menu or command line commands.


1. Create a comparison using the Comparison Wizard.
 - a. Select **Tools > Waveform Compare > Comparison Wizard**.
 - b. Click the **Browse** button and select *gold.wlf* as the reference dataset (Figure 13-1). Recall that *gold.wlf* is from the first simulation run.

Figure 13-1. First dialog of the Waveform Comparison Wizard

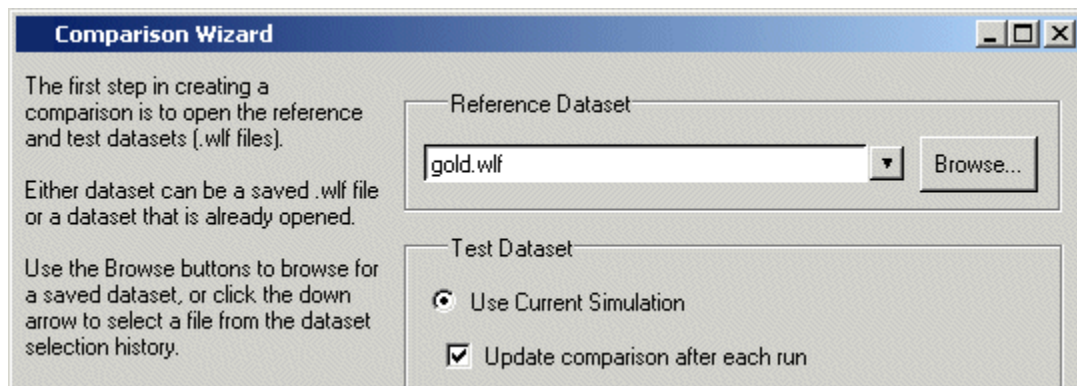

- c. Leaving the test dataset set to **Use Current Simulation**, click **Next**.
- d. Select **Compare All Signals** in the second dialog (Figure 13-2) and click **Next**.

Figure 13-2. Second dialog of the Waveform Comparison Wizard

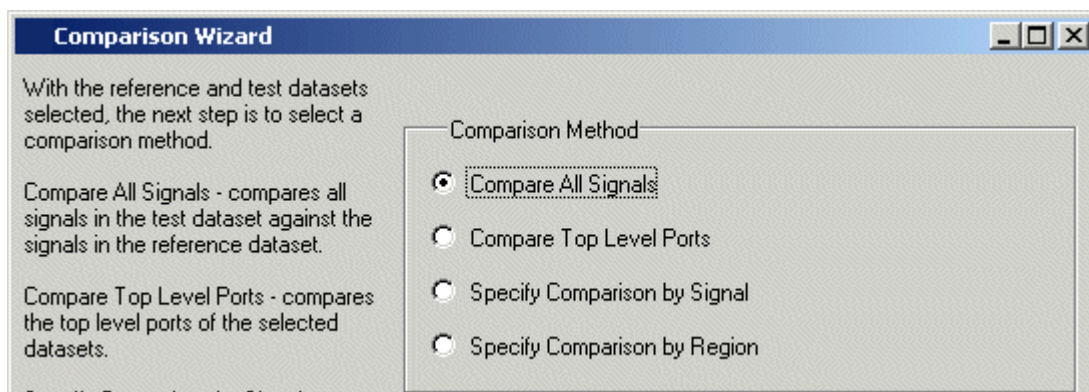

- e. In the next three dialogs, click **Next**, **Compute Differences Now**, and **Finish**, respectively.

ModelSim performs the comparison and displays the compared signals in the Wave window.

Viewing Comparison Data


Comparison data is displayed in the Workspace, Transcript, Objects, Wave and List window panes. Compare objects are denoted by a yellow triangle.

The Compare tab in the Workspace pane shows the region that was compared;

The Transcript pane shows the number of differences found between the reference and test datasets;

The Objects pane shows comparison differences when you select the comparison object in the Compare tab of the Workspace (Figure 13-3).

Figure 13-3. Comparison information in the Workspace and Objects panes

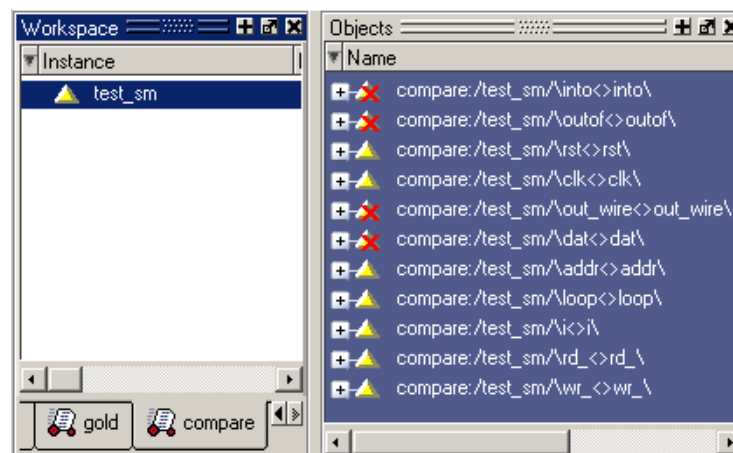


Comparison Data in the Wave window

The Wave window displays comparison information as follows:

- timing differences are denoted by a red X's in the pathnames column (Figure 13-4),

Figure 13-4. Comparison objects in the Wave window

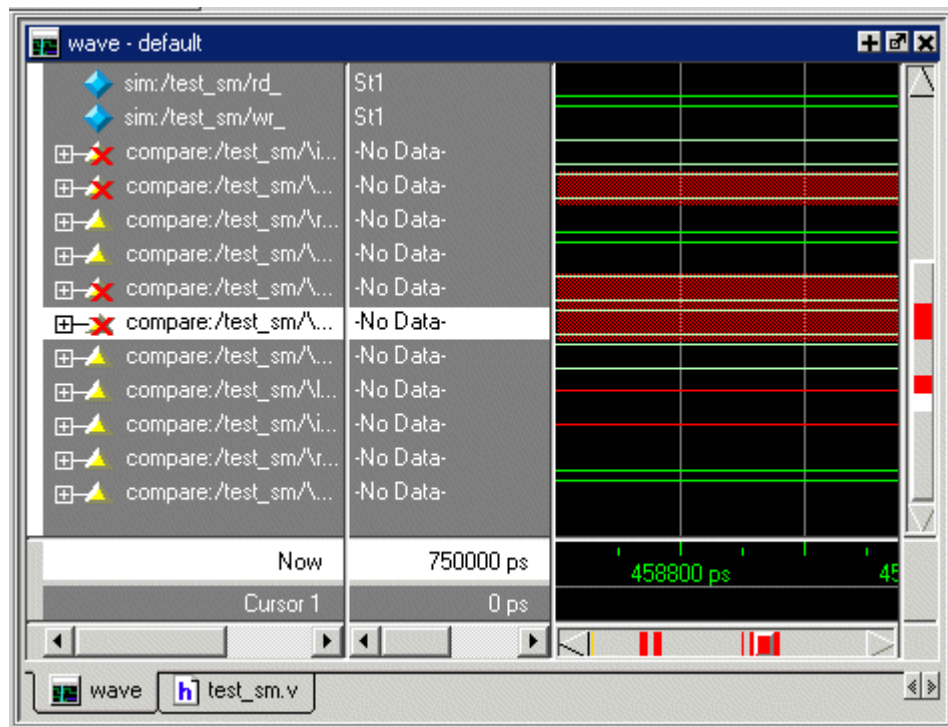

- red areas in the waveform view show the location of the timing differences,
- red lines in the scrollbars also show the location of timing differences,
- and, annotated differences are highlighted in blue.

The Wave window includes six compare icons that let you quickly jump between differences ([Figure 13-5](#)).

Figure 13-5. The compare icons



From left to right, the icons do the following: find first difference, find previous annotated difference, find previous difference, find next difference, find next annotated difference, find last difference. Use these icons to move the selected cursor.

The compare icons cycle through differences on all signals. To view differences in only a selected signal, use <tab> and <shift> - <tab>.

Comparison Data in the List Window


You can also view the results of your waveform comparison in the List window.

1. Add comparison data to the List window.

- a. Select **View > List** from the Main window menu bar.
- b. Drag the *test_sm* comparison object from the compare tab of the Main window to the List window.
- c. Scroll down the window.

Differences are noted with yellow highlighting (Figure 13-6). Differences that have been annotated have red highlighting.

Figure 13-6. Compare differences in the List window

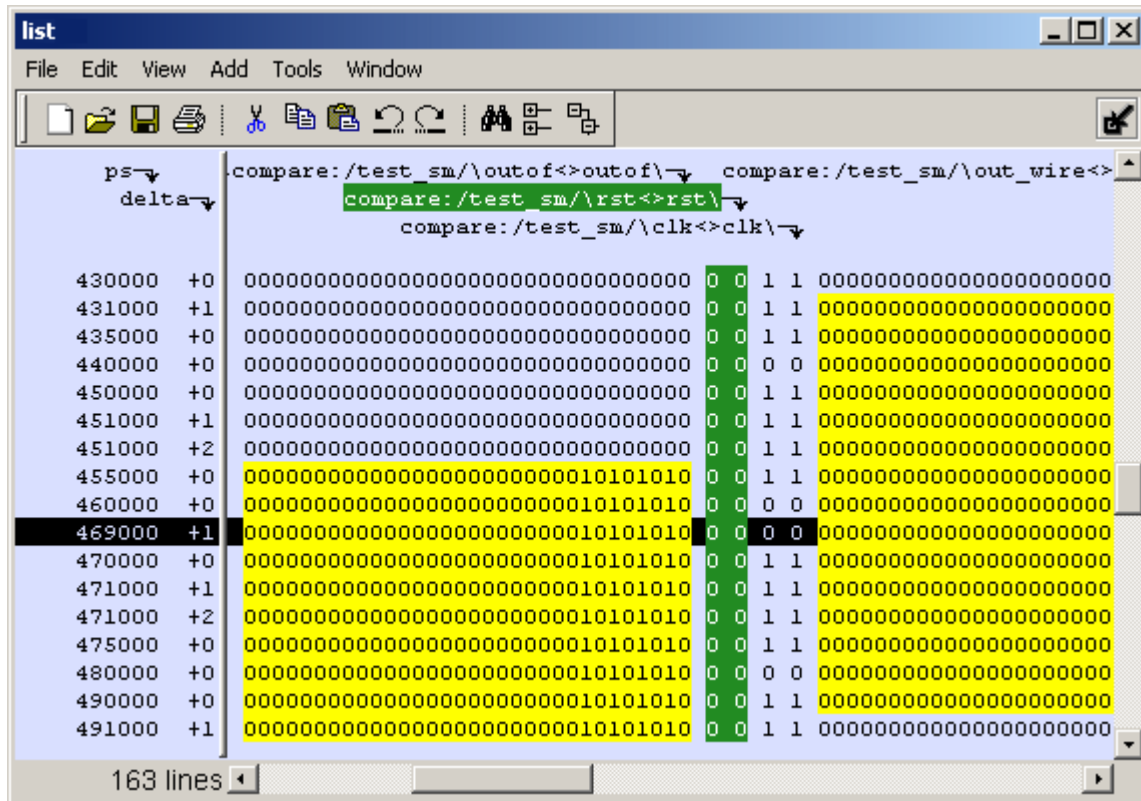

Saving and Reloading Comparison Data

You can save comparison data for later viewing, either in a text file or in files that can be reloaded into ModelSim.

To save comparison data so it can be reloaded into ModelSim, you must save two files. First, you save the computed differences to one file; next, you save the comparison configuration rules to a separate file. When you reload the data, you must have the reference dataset open.


1. Save the comparison data to a text file.
 - a. In the Main window, select **Tools > Waveform Compare > Differences > Write Report**.

- b. Click **Save**.

This saves *compare.txt* to the current directory.

- c. Type **notepad compare.txt** at the VSIM> prompt to display the report (Figure 13-7).

Figure 13-7. Coverage data saved to a text file

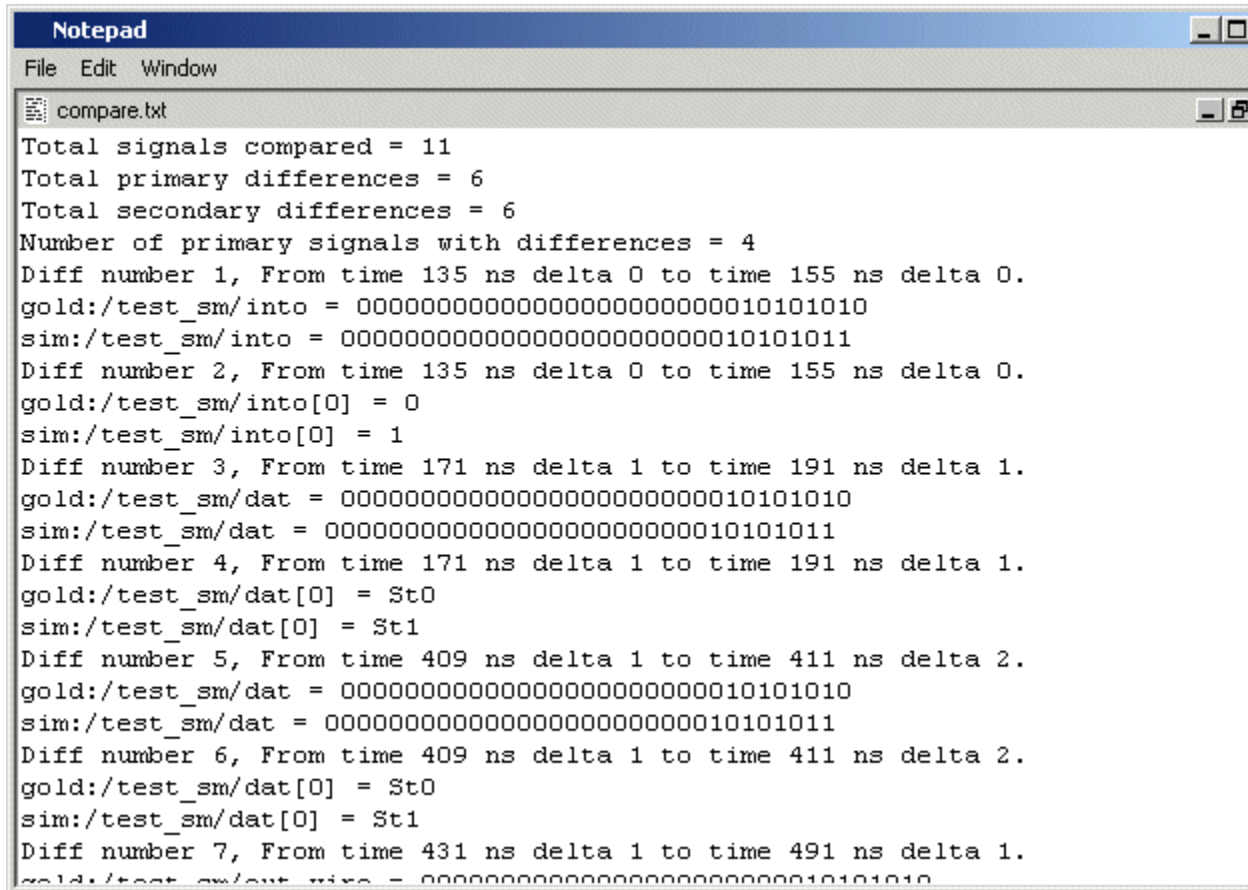

The screenshot shows a Notepad window with the title bar 'Notepad'. The menu bar includes 'File', 'Edit', and 'Window'. The file name in the title bar is 'compare.txt'. The text content of the file is as follows:

```
Total signals compared = 11
Total primary differences = 6
Total secondary differences = 6
Number of primary signals with differences = 4
Diff number 1, From time 135 ns delta 0 to time 155 ns delta 0.
gold:/test_sm/into = 00000000000000000000000010101010
sim:/test_sm/into = 00000000000000000000000010101011
Diff number 2, From time 135 ns delta 0 to time 155 ns delta 0.
gold:/test_sm/into[0] = 0
sim:/test_sm/into[0] = 1
Diff number 3, From time 171 ns delta 1 to time 191 ns delta 1.
gold:/test_sm/dat = 00000000000000000000000010101010
sim:/test_sm/dat = 00000000000000000000000010101011
Diff number 4, From time 171 ns delta 1 to time 191 ns delta 1.
gold:/test_sm/dat[0] = St0
sim:/test_sm/dat[0] = St1
Diff number 5, From time 409 ns delta 1 to time 411 ns delta 2.
gold:/test_sm/dat = 00000000000000000000000010101010
sim:/test_sm/dat = 00000000000000000000000010101011
Diff number 6, From time 409 ns delta 1 to time 411 ns delta 2.
gold:/test_sm/dat[0] = St0
sim:/test_sm/dat[0] = St1
Diff number 7, From time 431 ns delta 1 to time 491 ns delta 1.
gold:/test_sm/out_wire = 00000000000000000000000010101010
```

- d. Close Notepad when you have finished viewing the report.
2. Save the comparison data in files that can be reloaded into ModelSim.
 - a. Select **Tools > Waveform Compare > Differences > Save**.
 - b. Click **Save**.


This saves *compare.dif* to the current directory.

- c. Select **Tools > Waveform Compare > Rules > Save**.
- d. Click **Save**.

This saves *compare.rul* to the current directory.

- e. Select **Tools > Waveform Compare > End Comparison**.
3. Reload the comparison data.
 - a. With the sim tab of the Workspace active, select **File > Open**.
 - b. Change the **Files of Type** to Log Files (*.wlf) (Figure 13-8).


Figure 13-8. Displaying Log Files in the Open dialog

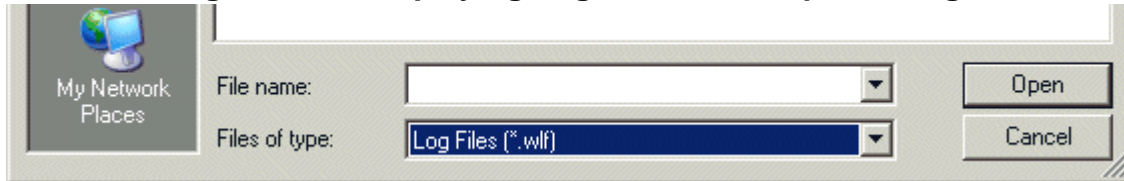

- c. Double-click *gold.wlf* to open the dataset.
- d. Select **Tools > Waveform Compare > Reload**.

Since you saved the data using default file names, the dialog should already have the correct Waveform Rules and Waveform Difference files specified (Figure 13-9).

Figure 13-9. Reloading saved comparison data

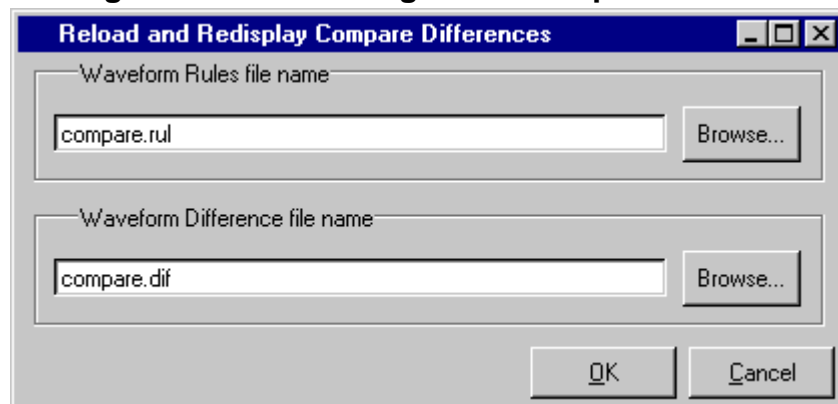

- e. Click **OK**.

The comparison reloads. You can drag the comparison object to the Wave or List window to view the differences again.

Lesson wrap-Up

This concludes this lesson. Before continuing we need to end the current simulation and close the *gold.wlf* dataset.

1. Type **quit -sim** at the VSIM> prompt.
2. Type **dataset close gold** at the ModelSim> prompt.

Chapter 14

Automating Simulation

Introduction

Aside from executing a couple of pre-existing DO files, the previous lessons focused on using ModelSim in interactive mode: executing single commands, one after another, via the GUI menus or Main window command line. In situations where you have repetitive tasks to complete, you can increase your productivity with DO files.

DO files are scripts that allow you to execute many commands at once. The scripts can be as simple as a series of ModelSim commands with associated arguments, or they can be full-blown Tcl programs with variables, conditional execution, and so forth. You can execute DO files from within the GUI or you can run them from the system command prompt without ever invoking the GUI.

Note



This lesson assumes that you have added the `<install_dir>/modeltech/<platform>` directory to your PATH. If you did not, you will need to specify full paths to the tools (i.e., vlib, vmap, vlog, vcom, and vsim) that are used in the lesson.

Related Reading

User's Manual Chapter: [Tcl and Macros \(DO Files\)](#).

Practical Programming in Tcl and Tk, Brent B. Welch, Copyright 1997

Disable Optimizations

By default, ModelSim optimizations are performed on all designs (see [Optimizing Designs with vopt](#)). When running simulations in this mode the global optimizations may have an impact on the visibility of your design results. Therefore, all exercises in the the tutorial should be run with optimizations disabled.

1. Open the *modelsim.ini* file in a text editor.
2. Disable optimizations by setting **VoptFlow = 0** in the [vsim] section.

Note



When you have completed the tutorial, remeber to reset the VoptFlow *modelsim.ini* variable to **VoptFlow = 1** for normal tool use.

Creating a Simple DO File

Creating DO files is as simple as typing the commands in a text file. Alternatively, you can save the Main window transcript as a DO file. In this exercise, you will use the transcript to create a DO file that adds signals to the Wave window, provides stimulus to those signals, and then advances the simulation.

1. Load the *test_counter* design unit.
 - a. If necessary, start ModelSim.
 - b. Change to the directory you created in Lesson 2.
 - c. In the Library tab of the Workspace pane, double-click the *test_counter* design unit to load it.
2. Enter commands to add signals to the Wave window, force signals, and run the simulation.
 - a. Select **File > New > Source > Do** to create a new DO file.
 - b. Enter the following commands into the source window:

```
add wave count
add wave clk
add wave reset
force -freeze clk 0 0, 1 {50 ns} -r 100
force reset 1
run 100
force reset 0
run 300
force reset 1
run 400
force reset 0
run 200
```

3. Save the file.
 - a. Select **File > Save As**.
 - b. Type **sim.do** in the File name: field and save it to the current directory.
4. Load the simulation again and use the DO file.
 - a. Type **quit -sim** at the VSIM> prompt.
 - b. Type **vsim test_counter** at the ModelSim> prompt.
 - c. Type **do sim.do** at the VSIM> prompt.

ModelSim executes the saved commands and draws the waves in the Wave window.
5. When you are done with this exercise, select **File > Quit** to quit ModelSim.

Running in Command-Line Mode

We use the term "command-line mode" to refer to simulations that are run from a DOS/ UNIX prompt without invoking the GUI. Several ModelSim commands (e.g., `vsim`, `vlib`, `vlog`, etc.) are actually stand-alone executables that can be invoked at the system command prompt. Additionally, you can create a DO file that contains other ModelSim commands and specify that file when you invoke the simulator.

1. Create a new directory and copy the tutorial files into it.

Start by creating a new directory for this exercise. Create the directory and copy the following files into it:

- `<install_dir>/examples/tutorials/verilog/automation/counter.v`
- `<install_dir>/examples/tutorials/verilog/automation/stim.do`

This lesson uses the Verilog file *counter.v*. If you have a VHDL license, use *the counter.vhd* and *stim.do* files in the `<install_dir>/examples/tutorials/vhdl/automation` directory instead.

2. Create a new design library and compile the source file.

Again, enter these commands at a DOS/ UNIX prompt in the new directory you created in step 1.

- a. Type **`vlib work`** at the DOS/ UNIX prompt.
- b. For Verilog, type **`vlog counter.v`** at the DOS/ UNIX prompt. For VHDL, type **`vcom counter.vhd`**.

3. Create a DO file.

- a. Open a text editor.
- b. Type the following lines into a new file:

```
# list all signals in decimal format
add list -decimal *

# read in stimulus
do stim.do

# output results
write list counter.lst

# quit the simulation
quit -f
```

- c. Save the file with the name *sim.do* and place it in the current directory.

4. Run the batch-mode simulation.

- a. Type **`vsim -c -do sim.do counter -wlf counter.wlf`** at the DOS/ UNIX prompt.

The **-c** argument instructs ModelSim not to invoke the GUI. The **-wlf** argument saves the simulation results in a WLF file. This allows you to view the simulation results in the GUI for debugging purposes.

5. View the list output.
 - a. Open *counter.lst* and view the simulation results. Output produced by the Verilog version of the design should look like the following:

```
ns          /counter/count
delta       /counter/clk
           /counter/reset
0   +0      x  z  *
1   +0      0  z  *
50  +0      0  *  *
100 +0      0  0  *
100 +1      0  0  0
150 +0      0  *  0
151 +0      1  *  0
200 +0      1  0  0
250 +0      1  *  0
.
.
.
```

The output may appear slightly different if you used the VHDL version.

6. View the results in the GUI.

Since you saved the simulation results in *counter.wlf*, you can view them in the GUI by invoking VSIM with the **-view** argument.


Note

Make sure your PATH environment variable is set with the current version of ModelSim at the front of the string.

- a. Type **vsim -view counter.wlf** at the DOS/ UNIX prompt.

The GUI opens and a dataset tab named "counter" is displayed in the Workspace (Figure 14-1).

Figure 14-1. A Dataset in the Main Window Workspace

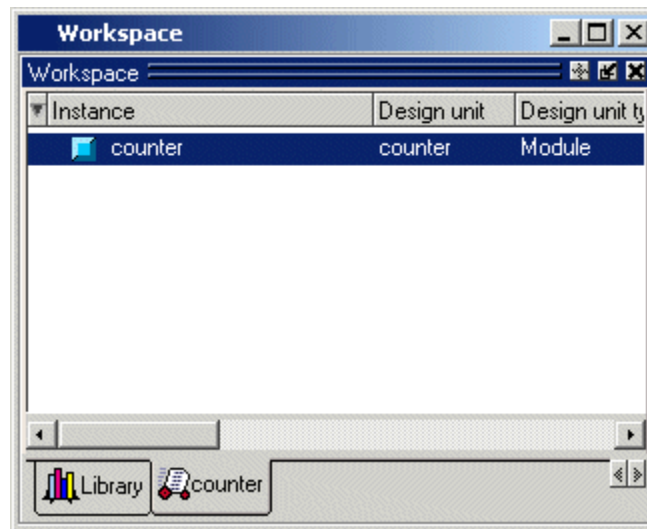

- b. Right-click the *counter* instance and select **Add > Add to Wave**.

The waveforms display in the Wave window.

7. When you finish viewing the results, select **File > Quit** to close ModelSim.

Using Tcl with the Simulator

The DO files used in previous exercises contained only ModelSim commands. However, DO files are really just Tcl scripts. This means you can include a whole variety of Tcl constructs such as procedures, conditional operators, math and trig functions, regular expressions, and so forth.

In this exercise you will create a simple Tcl script that tests for certain values on a signal and then adds bookmarks that zoom the Wave window when that value exists. Bookmarks allow you to save a particular zoom range and scroll position in the Wave window. The Tcl script also creates buttons in the Main window that call these bookmarks.

1. Create the script.
 - a. In a text editor, open a new file and enter the following lines:

```
proc add_wave_zoom {stime num} {  
    echo "Bookmarking wave $num"  
    bookmark add wave "bk$num" "[expr $stime - 50] [expr $stime +  
100]" 0  
    add button "$num" [list bookmark goto wave bk$num]  
}
```

These commands do the following:

- Create a new procedure called "add_wave_zoom" that has two arguments, *stime* and *num*.

- Create a bookmark with a zoom range from the current simulation time minus 50 time units to the current simulation time plus 100 time units.
- Add a button to the Main window that calls the bookmark.

b. Now add these lines to the bottom of the script:

```
add wave -r /*
when {clk'event and clk="1"} {
    echo "Count is [exa count]"
    if {[exa count]== "00100111"} {
        add_wave_zoom $now 1
    } elseif {[exa count]== "01000111"} {
        add_wave_zoom $now 2
    }
}
```

These commands do the following:

- Add all signals to the Wave window.
- Use a **when** statement to identify when *clk* transitions to 1.
- Examine the value of *count* at those transitions and add a bookmark if it is a certain value.

c. Save the script with the name "*add_bkmrk.do*."

Save it into the directory you created in [Basic Simulation](#).

2. Load the *test_counter* design unit.

- a. Start ModelSim.
- b. Select **File > Change Directory** and change to the directory you saved the DO file to in step 1c above.
- c. In the Library tab of the Main window, expand the *work* library and double-click the *test_counter* design unit.


3. Execute the DO file and run the design.

- a. Type **do add_bkmrk.do** at the VSIM> prompt.
- b. Type **run 1500 ns** at the VSIM> prompt.

The simulation runs and the DO file creates two bookmarks.

It also creates buttons (labeled "1" and "2") on the Main window toolbar that jump to the bookmarks ([Figure 14-2](#)).

Figure 14-2. Buttons Added to the Main Window Toolbar

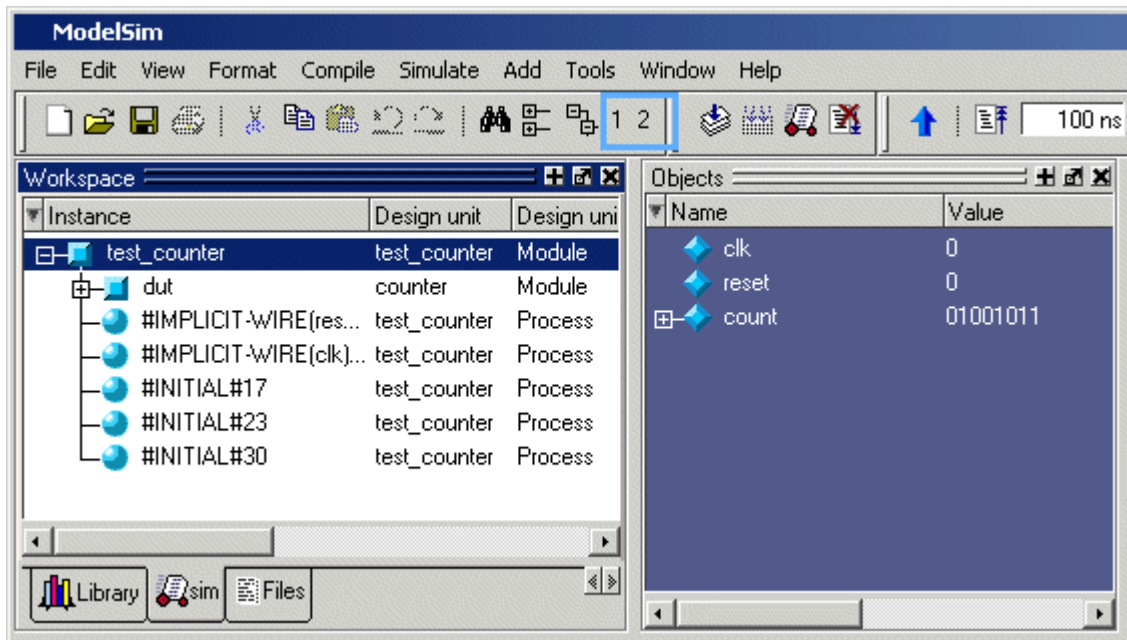

- c. Click the buttons and watch the Wave window zoom on and scroll to the time when *count* is the value specified in the DO file.

Lesson Wrap-Up

This concludes this lesson.

1. Select **File > Quit** to close ModelSim.

Index

— A —

aCC, [66](#)
 add dataflow command, [114](#)
 add wave command, [84](#)

— B —

break icon, [33](#)
 breakpoints
 in SystemC modules, [76](#)
 setting, [33](#)
 stepping, [35](#)

— C —

C Debug, [76](#)
 Code Coverage
 excluding lines and files, [153](#)
 reports, [154](#)
 Source window, [150](#)
 command-line mode, [169](#)
 compile order, changing, [45](#)
 compiling your design, [20](#), [28](#)
 -cover argument, [144](#)
 -coverage argument, [145](#)
 coverage report command, [155](#)
 cursors, Wave window, [85](#), [99](#)

— D —

Dataflow window
 displaying hierarchy, [114](#)
 expanding to drivers/readers, [106](#)
 options, [114](#)
 tracing events, [109](#)
 tracing unknowns, [112](#)
 dataset close command, [165](#)
 design library
 working type, [23](#)
 design optimization, [19](#)
 documentation, [15](#)
 drivers, expanding to, [106](#)

— E —

error messages, more information, [60](#)
 external libraries, linking to, [59](#)

— F —

folders, in projects, [48](#)
 format, saving for Wave window, [88](#)

— G —

gcc, [66](#)

— H —

hierarchy, displaying in Dataflow window, [114](#)

— L —

libraries
 design library types, [23](#)
 linking to external libraries, [59](#)
 mapping to permanently, [63](#)
 resource libraries, [23](#)
 working libraries, [23](#)
 working, creating, [26](#)
 linking to external libraries, [59](#)

— M —

manuals, [15](#)
 mapping libraries permanently, [63](#)
 memories
 changing values, [129](#)
 initializing, [125](#)
 memory contents, saving to a file, [124](#)

— N —

notepad command, [164](#)

— O —

optimization, [19](#)
 optimizations
 disabling for whole design, [26](#), [42](#), [56](#), [66](#),
 [82](#), [89](#), [104](#), [117](#), [134](#), [144](#), [167](#)
 options, simulation, [50](#)

— P —

Performance Analyzer
 filtering data, [139](#)
 physical connectivity, [106](#)
 Profiler
 profile details, [138](#)
 viewing profile details, [138](#)
 projects
 adding items to, [43](#)
 creating, [42](#)
 flow overview, [22](#)
 organizing with folders, [48](#)
 simulation configurations, [50](#)

— Q —

quit command, [60](#)

— R —

radix command, [119](#)
 reference dataset, Waveform Compare, [158](#)
 reference signals, [157](#)
 run -all, [32](#)
 run command, [32](#)

— S —

saving simulation options, [50](#)
 simulation
 basic flow overview, [20](#)
 restarting, [34](#)
 running, [31](#)
 simulation configurations, [50](#)
 Standard Developer's Kit User Manual, [16](#)
 stepping after a breakpoint, [35](#)
 Support, [16](#)
 SystemC
 setting up the environment, [66](#)
 supported platforms, [66](#)
 viewing in the GUI, [75](#)

— T —

Tcl, using in the simulator, [171](#)
 Technical support and updates, [16](#)
 test dataset, Waveform Compare, [158](#)
 test signals, [157](#)
 time, measuring in Wave window, [85, 99](#)
 toggle statistics, Signals window, [152](#)
 tracing events, [109](#)

tracing unknowns, [112](#)

— U —

unknowns, tracing, [112](#)

— V —

vcom command, [118](#)
 verror command, [60](#)
 vlib command, [118](#)
 vlog command, [118](#)
 vsim command, [26](#)

— W —

Wave window
 adding items to, [82, 90](#)
 cursors, [85, 99](#)
 measuring time with cursors, [85, 99](#)
 saving format, [88](#)
 zooming, [84, 94](#)
 Waveform Compare
 reference signals, [157](#)
 saving and reloading, [163](#)
 test signals, [157](#)
 working library, creating, [20, 26](#)

— X —

X values, tracing, [112](#)

— Z —

zooming, Wave window, [84, 94](#)

End-User License Agreement

The latest version of the End-User License Agreement is available on-line at:
www.mentor.com/terms_conditions/enduser.cfm

IMPORTANT INFORMATION

USE OF THIS SOFTWARE IS SUBJECT TO LICENSE RESTRICTIONS. CAREFULLY READ THIS LICENSE AGREEMENT BEFORE USING THE SOFTWARE. USE OF SOFTWARE INDICATES YOUR COMPLETE AND UNCONDITIONAL ACCEPTANCE OF THE TERMS AND CONDITIONS SET FORTH IN THIS AGREEMENT. ANY ADDITIONAL OR DIFFERENT PURCHASE ORDER TERMS AND CONDITIONS SHALL NOT APPLY.

END-USER LICENSE AGREEMENT ("Agreement")

This is a legal agreement concerning the use of Software between you, the end user, as an authorized representative of the company acquiring the license, and Mentor Graphics Corporation and Mentor Graphics (Ireland) Limited acting directly or through their subsidiaries (collectively "Mentor Graphics"). Except for license agreements related to the subject matter of this license agreement which are physically signed by you and an authorized representative of Mentor Graphics, this Agreement and the applicable quotation contain the parties' entire understanding relating to the subject matter and supersede all prior or contemporaneous agreements. If you do not agree to these terms and conditions, promptly return or, if received electronically, certify destruction of Software and all accompanying items within five days after receipt of Software and receive a full refund of any license fee paid.

- GRANT OF LICENSE.** The software programs, including any updates, modifications, revisions, copies, documentation and design data ("Software"), are copyrighted, trade secret and confidential information of Mentor Graphics or its licensors who maintain exclusive title to all Software and retain all rights not expressly granted by this Agreement. Mentor Graphics grants to you, subject to payment of appropriate license fees, a nontransferable, nonexclusive license to use Software solely: (a) in machine-readable, object-code form; (b) for your internal business purposes; (c) for the license term; and (d) on the computer hardware and at the site authorized by Mentor Graphics. A site is restricted to a one-half mile (800 meter) radius. Mentor Graphics' standard policies and programs, which vary depending on Software, license fees paid or services purchased, apply to the following: (a) relocation of Software; (b) use of Software, which may be limited, for example, to execution of a single session by a single user on the authorized hardware or for a restricted period of time (such limitations may be technically implemented through the use of authorization codes or similar devices); and (c) support services provided, including eligibility to receive telephone support, updates, modifications, and revisions.
- EMBEDDED SOFTWARE.** If you purchased a license to use embedded software development ("ESD") Software, if applicable, Mentor Graphics grants to you a nontransferable, nonexclusive license to reproduce and distribute executable files created using ESD compilers, including the ESD run-time libraries distributed with ESD C and C++ compiler Software that are linked into a composite program as an integral part of your compiled computer program, provided that you distribute these files only in conjunction with your compiled computer program. Mentor Graphics does NOT grant you any right to duplicate, incorporate or embed copies of Mentor Graphics' real-time operating systems or other embedded software products into your products or applications without first signing or otherwise agreeing to a separate agreement with Mentor Graphics for such purpose.
- BETA CODE.** Software may contain code for experimental testing and evaluation ("Beta Code"), which may not be used without Mentor Graphics' explicit authorization. Upon Mentor Graphics' authorization, Mentor Graphics grants to you a temporary, nontransferable, nonexclusive license for experimental use to test and evaluate the Beta Code without charge for a limited period of time specified by Mentor Graphics. This grant and your use of the Beta Code shall not be construed as marketing or offering to sell a license to the Beta Code, which Mentor Graphics may choose not to release commercially in any form. If Mentor Graphics authorizes you to use the Beta Code, you agree to evaluate and test the Beta Code under normal conditions as directed by Mentor Graphics. You will contact Mentor Graphics periodically during your use of the Beta Code to discuss any malfunctions or suggested improvements. Upon completion of your evaluation and testing, you will send to Mentor Graphics a written evaluation of the Beta Code, including its strengths, weaknesses and recommended improvements. You agree that any written evaluations and all inventions, product improvements, modifications or developments that Mentor Graphics conceived or made during or subsequent to this Agreement, including those based partly or wholly on your feedback, will be the exclusive property of Mentor Graphics. Mentor Graphics will have exclusive rights, title and interest in all such property. The provisions of this section 3 shall survive the termination or expiration of this Agreement.

4. **RESTRICTIONS ON USE.** You may copy Software only as reasonably necessary to support the authorized use. Each copy must include all notices and legends embedded in Software and affixed to its medium and container as received from Mentor Graphics. All copies shall remain the property of Mentor Graphics or its licensors. You shall maintain a record of the number and primary location of all copies of Software, including copies merged with other software, and shall make those records available to Mentor Graphics upon request. You shall not make Software available in any form to any person other than employees and on-site contractors, excluding Mentor Graphics' competitors, whose job performance requires access and who are under obligations of confidentiality. You shall take appropriate action to protect the confidentiality of Software and ensure that any person permitted access to Software does not disclose it or use it except as permitted by this Agreement. Except as otherwise permitted for purposes of interoperability as specified by applicable and mandatory local law, you shall not reverse-assemble, reverse-compile, reverse-engineer or in any way derive from Software any source code. You may not sublicense, assign or otherwise transfer Software, this Agreement or the rights under it, whether by operation of law or otherwise ("attempted transfer"), without Mentor Graphics' prior written consent and payment of Mentor Graphics' then-current applicable transfer charges. Any attempted transfer without Mentor Graphics' prior written consent shall be a material breach of this Agreement and may, at Mentor Graphics' option, result in the immediate termination of the Agreement and licenses granted under this Agreement. The terms of this Agreement, including without limitation, the licensing and assignment provisions shall be binding upon your successors in interest and assigns. The provisions of this section 4 shall survive the termination or expiration of this Agreement.
5. **LIMITED WARRANTY.**
 - 5.1. Mentor Graphics warrants that during the warranty period Software, when properly installed, will substantially conform to the functional specifications set forth in the applicable user manual. Mentor Graphics does not warrant that Software will meet your requirements or that operation of Software will be uninterrupted or error free. The warranty period is 90 days starting on the 15th day after delivery or upon installation, whichever first occurs. You must notify Mentor Graphics in writing of any nonconformity within the warranty period. This warranty shall not be valid if Software has been subject to misuse, unauthorized modification or improper installation. MENTOR GRAPHICS' ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY SHALL BE, AT MENTOR GRAPHICS' OPTION, EITHER (A) REFUND OF THE PRICE PAID UPON RETURN OF SOFTWARE TO MENTOR GRAPHICS OR (B) MODIFICATION OR REPLACEMENT OF SOFTWARE THAT DOES NOT MEET THIS LIMITED WARRANTY, PROVIDED YOU HAVE OTHERWISE COMPLIED WITH THIS AGREEMENT. MENTOR GRAPHICS MAKES NO WARRANTIES WITH RESPECT TO: (A) SERVICES; (B) SOFTWARE WHICH IS LICENSED TO YOU FOR A LIMITED TERM OR LICENSED AT NO COST; OR (C) EXPERIMENTAL BETA CODE; ALL OF WHICH ARE PROVIDED "AS IS."
 - 5.2. THE WARRANTIES SET FORTH IN THIS SECTION 5 ARE EXCLUSIVE. NEITHER MENTOR GRAPHICS NOR ITS LICENSORS MAKE ANY OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, WITH RESPECT TO SOFTWARE OR OTHER MATERIAL PROVIDED UNDER THIS AGREEMENT. MENTOR GRAPHICS AND ITS LICENSORS SPECIFICALLY DISCLAIM ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OF INTELLECTUAL PROPERTY.
6. **LIMITATION OF LIABILITY.** EXCEPT WHERE THIS EXCLUSION OR RESTRICTION OF LIABILITY WOULD BE VOID OR INEFFECTIVE UNDER APPLICABLE LAW, IN NO EVENT SHALL MENTOR GRAPHICS OR ITS LICENSORS BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS OR SAVINGS) WHETHER BASED ON CONTRACT, TORT OR ANY OTHER LEGAL THEORY, EVEN IF MENTOR GRAPHICS OR ITS LICENSORS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT SHALL MENTOR GRAPHICS' OR ITS LICENSORS' LIABILITY UNDER THIS AGREEMENT EXCEED THE AMOUNT PAID BY YOU FOR THE SOFTWARE OR SERVICE GIVING RISE TO THE CLAIM. IN THE CASE WHERE NO AMOUNT WAS PAID, MENTOR GRAPHICS AND ITS LICENSORS SHALL HAVE NO LIABILITY FOR ANY DAMAGES WHATSOEVER. THE PROVISIONS OF THIS SECTION 6 SHALL SURVIVE THE EXPIRATION OR TERMINATION OF THIS AGREEMENT.
7. **LIFE ENDANGERING ACTIVITIES.** NEITHER MENTOR GRAPHICS NOR ITS LICENSORS SHALL BE LIABLE FOR ANY DAMAGES RESULTING FROM OR IN CONNECTION WITH THE USE OF SOFTWARE IN ANY APPLICATION WHERE THE FAILURE OR INACCURACY OF THE SOFTWARE MIGHT RESULT IN DEATH OR PERSONAL INJURY. THE PROVISIONS OF THIS SECTION 7 SHALL SURVIVE THE EXPIRATION OR TERMINATION OF THIS AGREEMENT.
8. **INDEMNIFICATION.** YOU AGREE TO INDEMNIFY AND HOLD HARMLESS MENTOR GRAPHICS AND ITS LICENSORS FROM ANY CLAIMS, LOSS, COST, DAMAGE, EXPENSE, OR LIABILITY, INCLUDING ATTORNEYS' FEES, ARISING OUT OF OR IN CONNECTION WITH YOUR USE OF SOFTWARE AS

DESCRIBED IN SECTION 7. THE PROVISIONS OF THIS SECTION 8 SHALL SURVIVE THE EXPIRATION OR TERMINATION OF THIS AGREEMENT.

9. **INFRINGEMENT.**

9.1. Mentor Graphics will defend or settle, at its option and expense, any action brought against you alleging that Software infringes a patent or copyright or misappropriates a trade secret in the United States, Canada, Japan, or member state of the European Patent Office. Mentor Graphics will pay any costs and damages finally awarded against you that are attributable to the infringement action. You understand and agree that as conditions to Mentor Graphics' obligations under this section you must: (a) notify Mentor Graphics promptly in writing of the action; (b) provide Mentor Graphics all reasonable information and assistance to defend or settle the action; and (c) grant Mentor Graphics sole authority and control of the defense or settlement of the action.

9.2. If an infringement claim is made, Mentor Graphics may, at its option and expense: (a) replace or modify Software so that it becomes noninfringing; (b) procure for you the right to continue using Software; or (c) require the return of Software and refund to you any license fee paid, less a reasonable allowance for use.

9.3. Mentor Graphics has no liability to you if infringement is based upon: (a) the combination of Software with any product not furnished by Mentor Graphics; (b) the modification of Software other than by Mentor Graphics; (c) the use of other than a current unaltered release of Software; (d) the use of Software as part of an infringing process; (e) a product that you make, use or sell; (f) any Beta Code contained in Software; (g) any Software provided by Mentor Graphics' licensors who do not provide such indemnification to Mentor Graphics' customers; or (h) infringement by you that is deemed willful. In the case of (h) you shall reimburse Mentor Graphics for its attorney fees and other costs related to the action upon a final judgment.

9.4. THIS SECTION IS SUBJECT TO SECTION 6 ABOVE AND STATES THE ENTIRE LIABILITY OF MENTOR GRAPHICS AND ITS LICENSORS AND YOUR SOLE AND EXCLUSIVE REMEDY WITH RESPECT TO ANY ALLEGED PATENT OR COPYRIGHT INFRINGEMENT OR TRADE SECRET MISAPPROPRIATION BY ANY SOFTWARE LICENSED UNDER THIS AGREEMENT.

10. **TERM.** This Agreement remains effective until expiration or termination. This Agreement will immediately terminate upon notice if you exceed the scope of license granted or otherwise fail to comply with the provisions of Sections 1, 2, or 4. For any other material breach under this Agreement, Mentor Graphics may terminate this Agreement upon 30 days written notice if you are in material breach and fail to cure such breach within the 30 day notice period. If Software was provided for limited term use, this Agreement will automatically expire at the end of the authorized term. Upon any termination or expiration, you agree to cease all use of Software and return it to Mentor Graphics or certify deletion and destruction of Software, including all copies, to Mentor Graphics' reasonable satisfaction.

11. **EXPORT.** Software is subject to regulation by local laws and United States government agencies, which prohibit export or diversion of certain products, information about the products, and direct products of the products to certain countries and certain persons. You agree that you will not export any Software or direct product of Software in any manner without first obtaining all necessary approval from appropriate local and United States government agencies.

12. **RESTRICTED RIGHTS NOTICE.** Software was developed entirely at private expense and is commercial computer software provided with RESTRICTED RIGHTS. Use, duplication or disclosure by the U.S. Government or a U.S. Government subcontractor is subject to the restrictions set forth in the license agreement under which Software was obtained pursuant to DFARS 227.7202-3(a) or as set forth in subparagraphs (c)(1) and (2) of the Commercial Computer Software - Restricted Rights clause at FAR 52.227-19, as applicable. Contractor/manufacturer is Mentor Graphics Corporation, 8005 SW Boeckman Road, Wilsonville, Oregon 97070-7777 USA.

13. **THIRD PARTY BENEFICIARY.** For any Software under this Agreement licensed by Mentor Graphics from Microsoft or other licensors, Microsoft or the applicable licensor is a third party beneficiary of this Agreement with the right to enforce the obligations set forth herein.

14. **AUDIT RIGHTS.** You will monitor access to, location and use of Software. With reasonable prior notice and during your normal business hours, Mentor Graphics shall have the right to review your software monitoring system and reasonably relevant records to confirm your compliance with the terms of this Agreement, an addendum to this Agreement or U.S. or other local export laws. Such review may include FLEXlm or FLEXnet report log files that you shall capture and provide at Mentor Graphics' request. Mentor Graphics shall treat as confidential information all of your information gained as a result of any request or review and shall only use or disclose such information as required by law or to enforce its rights under this Agreement or addendum to this Agreement. The provisions of this section 14 shall survive the expiration or termination of this Agreement.

15. **CONTROLLING LAW, JURISDICTION AND DISPUTE RESOLUTION.** THIS AGREEMENT SHALL BE GOVERNED BY AND CONSTRUED UNDER THE LAWS OF THE STATE OF OREGON, USA, IF YOU ARE LOCATED IN NORTH OR SOUTH AMERICA, AND THE LAWS OF IRELAND IF YOU ARE LOCATED OUTSIDE OF NORTH OR SOUTH AMERICA. All disputes arising out of or in relation to this Agreement shall be submitted to the exclusive jurisdiction of Portland, Oregon when the laws of Oregon apply, or Dublin, Ireland when the laws of Ireland apply. Notwithstanding the foregoing, all disputes in Asia (except for Japan) arising out of or in relation to this Agreement shall be resolved by arbitration in Singapore before a single arbitrator to be appointed by the Chairman of the Singapore International Arbitration Centre ("SIAC") to be conducted in the English language, in accordance with the Arbitration Rules of the SIAC in effect at the time of the dispute, which rules are deemed to be incorporated by reference in this section 15. This section shall not restrict Mentor Graphics' right to bring an action against you in the jurisdiction where your place of business is located. The United Nations Convention on Contracts for the International Sale of Goods does not apply to this Agreement.
16. **SEVERABILITY.** If any provision of this Agreement is held by a court of competent jurisdiction to be void, invalid, unenforceable or illegal, such provision shall be severed from this Agreement and the remaining provisions will remain in full force and effect.
17. **PAYMENT TERMS AND MISCELLANEOUS.** You will pay amounts invoiced, in the currency specified on the applicable invoice, within 30 days from the date of such invoice. Any past due invoices will be subject to the imposition of interest charges in the amount of one and one-half percent per month or the applicable legal rate currently in effect, whichever is lower. Some Software may contain code distributed under a third party license agreement that may provide additional rights to you. Please see the applicable Software documentation for details. This Agreement may only be modified in writing by authorized representatives of the parties. Waiver of terms or excuse of breach must be in writing and shall not constitute subsequent consent, waiver or excuse.